

Dialogic® Digital Network Interface Software Reference

Copyright © 1999-2008 Dialogic Corporation

05-1313-006

Copyright and Legal Notice

Copyright © 1999-2008 Dialogic Corporation. All Rights Reserved. You may not reproduce this document in whole or in part without permission in writing from Dialogic Corporation at the address provided below.

All contents of this document are furnished for informational use only and are subject to change without notice and do not represent a commitment on the part of Dialogic Corporation or its subsidiaries ("Dialogic"). Reasonable effort is made to ensure the accuracy of the information contained in the document. However, Dialogic does not warrant the accuracy of this information and cannot accept responsibility for errors, inaccuracies, or omissions that may be contained in this document.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH DIALOGIC® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN A SIGNED AGREEMENT BETWEEN YOU AND DIALOGIC, DIALOGIC ASSUMES NO LIABILITY WHATSOEVER, AND DIALOGIC DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF DIALOGIC PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT OF A THIRD PARTY.

Dialogic products are not intended for use in medical, life saving, life sustaining, critical control or safety systems, or in nuclear facility applications.

Due to differing national regulations and approval requirements, certain Dialogic products may be suitable for use only in specific countries, and thus may not function properly in other countries. You are responsible for ensuring that your use of such products occurs only in the countries where such use is suitable. For information on specific products, contact Dialogic Corporation at the address indicated below or on the web at www.dialogic.com.

It is possible that the use or implementation of any one of the concepts, applications, or ideas described in this document, in marketing collateral produced by or on web pages maintained by Dialogic may infringe one or more patents or other intellectual property rights owned by third parties. Dialogic does not provide any intellectual property licenses with the sale of Dialogic products other than a license to use such product in accordance with intellectual property owned or validly licensed by Dialogic and no such licenses are provided except pursuant to a signed agreement with Dialogic. More detailed information about such intellectual property is available from Dialogic's legal department at 9800 Cavendish Blvd., 5th Floor, Montreal, Quebec, Canada H4M 2V9. **Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement any concepts or applications and does not condone or encourage any intellectual property infringement and disclaims any responsibility related thereto. These intellectual property licenses may differ from country to country and it is the responsibility of those who develop the concepts or applications to be aware of and comply with different national license requirements.**

Dialogic, Dialogic Pro, Brooktrout, Cantata, SnowShore, Eicon, Eicon Networks, Eiconcard, Diva, SIPcontrol, Diva ISDN, TruFax, Realblobs, Realcomm 100, NetAccess, Instant ISDN, TRXStream, Exnet, Exnet Connect, EXS, ExchangePlus VSE, Switchkit, N20, Powering The Service-Ready Network, Vantage, Making Innovation Thrive, Connecting People to Information, Connecting to Growth and Shiva, among others as well as related logos, are either registered trademarks or trademarks of Dialogic Corporation or its subsidiaries. Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at 9800 Cavendish Blvd., 5th Floor, Montreal, Quebec, Canada H4M 2V9. Any authorized use of Dialogic's trademarks will be subject to full respect of the trademark guidelines published by Dialogic from time to time and any use of Dialogic's trademarks requires proper acknowledgement.

Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries. Other names of actual companies and product mentioned herein are the trademarks of their respective owners.

Publication Date: December 2008

Document Number: 05-1313-006

Table of Contents

1. How to Use This Manual	11
1.1. Getting Started with This Guide	11
1.2. Organization of this Guide	12
2. General Description	13
2.1. Typical Applications	13
2.2. Compatibility.....	14
2.3. SCbus Overview	15
3. Digital Telephony Overview.....	17
3.1. T1 Digital Telephony	17
3.1.1. T1 Frame Format.....	17
3.1.2. T1 Synchronization	19
3.1.3. T1 Signaling	19
3.2. E1 Digital Telephony	20
3.2.1. E1 Frame Format.....	20
3.2.2. E1 Synchronization	22
3.2.3. E1 Signaling	23
3.2.4. E1 National and International Bits	25
3.3. Digital Network Interface Hardware Implementation.....	26
3.3.1. SCbus Routing.....	26
3.3.2. Loss of Synchronization Alarm Handling	26
3.3.3. Digital Network Interface Hardware Alarm Indicators	30
4. Function Overview.....	31
4.1. Dialogic® Digital Network Interface API Library Function Categories	31
4.1.1. Alarm Functions	32
4.1.2. Diagnostic Functions.....	32
4.1.3. Extended Attribute Functions.....	32
4.1.4. Parameter Request Functions	33
4.1.5. Parameter Setting Functions.....	33
4.1.6. Resource Management Functions.....	33
4.1.7. Routing Functions	34
4.1.8. Statistics Functions.....	34
4.1.9. Time Slot Audio Functions	34
4.1.10. Time Slot Signaling Functions	35
4.2. Error Handling	36
4.3. Include Files.....	39

Dialogic® Digital Network Interface Software Reference

5. Function Reference	41
ATDT_BDMODE() - returns the current mode of every time slot.....	42
ATDT_BDSGBT() - returns the current state of the transmit and receive bits .	45
ATDT_DNLDVER() - returns the firmware version.....	49
ATDT_IDLEST() - returns the current idle state.....	54
ATDT_ROMVER() - returns the version of the EEPROM	57
ATDT_STATUS() - returns the current status.....	62
ATDT_TS MODE() - returns the current signaling mode	65
ATDT_TSSGBT() - retrieves the current bit state	68
dt_castdecode() - decode the CAS DTI reply or event message block	71
dt_castencode() - validate and encode the message	73
dt_castmgmt() - manage the CAS DTI templates	75
dt_close() - closes digital network interface devices	87
dt_dial() - allows the application to pulse dial	89
dt_getctinfo() - returns information about the digital network interface.....	94
dt_getevt() - blocks and returns control to the program.....	98
dt_getevtmsk() - retrieves the current event bitmask(s)	102
dt_getparm() - gets the current parameter value	107
dt_getstatistics() - returns the statistics queried	114
dt_getxmitslot() - returns the SCbus time slot.....	119
dt_listen() - connects the digital listen channel.....	122
dt_open() - opens a digital network interface device	126
dt_rundia g() - runs diagnostics	129
dt_setalarm() - sets the alarm handling mode	134
dt_setevtmsk() - enables and disables notification for events.....	137
dt_setidle() - enables or disables transmission	143
dt_setparm() - changes the value of a DNI device parameter	146
dt_setsigmod() - sets the type of signaling.....	149
dt_settssig() - sets or clears the transmit	152
dt_settssigsim() - simultaneous setting or clearing of transmit signaling bits...	155
dt_tstcom() - tests the ability of a digital network interface device	158
dt_tstdat() - performs a test	162
dt_unlisten() - disconnects the receive channel.....	166
dt_xmitalarm() - starts and stops transmission of an alarm	169
dt_xmitwink() - transmits wink signaling	172
6. Application Guidelines.....	177
6.1. Writing a Simple Application	177
6.1.1. General Guidelines	177
6.1.2. Initialization.....	180

Table of Contents

6.1.3. Processing.....	185
6.1.4. Terminating	190
6.1.5. Compiling and Linking	192
6.1.6. Aborting	192
6.2. Adding Advanced Features.....	192
7. Dialogic® Digital Network Interface API for Dialogic® DM3 Boards	195
7.1. Digital Network Interface API Function Restrictions.....	195
7.2. Detecting Layer 1 Alarms	196
Appendix A – Dialogic® Standard Runtime Library.....	199
Digital Network Interface Entries and Returns	199
Event Management Functions.....	200
Standard Attribute Functions	203
TPT Structure.....	205
Appendix B - Message Blocks	207
Command Message Blocks	207
Reply Message Blocks	225
Unsolicited Events	235
Appendix C - dticas.h Header File.....	237
Appendix D - Related Publications.....	243
Glossary	245
Index.....	251

Dialogic® Digital Network Interface Software Reference

List of Tables

Table 1. Error Types Defined in <i>dtilib.h</i>	37
Table 2. ATDT_DNLVER() Return Values	51
Table 3. ATDT_ROMVER() Return Values	59
Table 4. Common Data Types.....	77
Table 5. dt_getevtmsk() Return Values.....	103
Table 6. dt_getparm() Parameters	107
Table 7. Recommended dt_setalarm() Settings	181
Table 8. List of Dialogic® Digital Network Interface API Functions Supported on Dialogic® DM3 boards	196
Table 9. Guide to Appendix A	199
Table 10. Digital Network Interface Inputs for Event Management Functions	201
Table 11. Digital Network Interface Returns from Event Management Functions	203
Table 12. Standard Attribute Functions	204
Table 13. DV_TPT Structure	205

Dialogic® Digital Network Interface Software Reference

List of Figures

Figure 1. D4 Frame Format.....	18
Figure 2. D4 Superframe Format	19
Figure 3. E1 Frame Format	21
Figure 4. E1 Multiframe Format	21
Figure 5. Individual Frame Synchronization.....	22
Figure 6. Multiframe Synchronization	23
Figure 7. Channel Associated Signaling (CAS) Protocol	24
Figure 8. E1 National and International Bits.....	26
Figure 9. T1 Alarm Conditions	28
Figure 10. E1 Loss of Synchronization Alarm Requirements.....	29
Figure 11. Firmware Version Number Format.....	50
Figure 12. EEPROM Version Number Format	58
Figure 13. Transition Timing, Receive	208
Figure 14. Transition Timing, Transmit.....	208
Figure 15. Pulse Timing, Receive	211
Figure 16. Pulse Timing, Transmit.....	211
Figure 17. Pulse Train Timing, Receive	214
Figure 18. Pulse Train Timing, Transmit.....	214

Dialogic® Digital Network Interface Software Reference

1. How to Use This Manual

This guide is for users who have a Dialogic® Digital Network Interface or Voice and Network Board and related software installed on a host computer operating in a Linux or Windows® environment.

For a list of the hardware products supported with this software, see the Release Guide for your Dialogic® Software Release.

1.1. Getting Started with This Guide

The following steps explain the order in which a Dialogic® Digital Network Interface Board and related software products should be installed, checked, and programmed.

1. Prepare the Digital Network Interface Board for installation using the appropriate hardware installation card.
2. Install the Dialogic® Software Release by following the procedure described in the Dialogic® Software Installation Guide.
3. Install the Digital Network Interface Board(s) in your computer following the procedures in the appropriate hardware installation card.
4. Refer to this *Dialogic® Digital Network Interface Software Reference*, and the *Dialogic® Standard Runtime Library API Library Reference* and *Dialogic® Standard Runtime Library API Programming Guide* to develop application programs.

To use software for other devices, refer to the appropriate software reference for specific instructions (see *Appendix D - Related Publications*).

1.2. Organization of this Guide

This *Dialogic® Digital Network Interface Software Reference* contains an overview of the digital telephony interface and the Dialogic® Digital Network Interface API library function reference. It is organized as follows:

Chapter 2 provides a brief description of the Dialogic® Digital Network Interface API library, typical applications using the Dialogic® Digital Network Interface products, and an overview of the SCbus.

Chapter 3 presents an overview of digital telephony interface hardware implementation in relation to basic T1 and E1 telephony practices.

Chapter 4 presents an overview of the Dialogic® Digital Network Interface API library functions and includes a discussion of C function error handling.

Chapter 5 provides an alphabetical reference to the Dialogic® Digital Network Interface API library functions, including programming examples for each function.

Chapter 6 provides guidelines for the design of digital network interface applications.

Chapter 7 provides information on using the Dialogic® Digital Network Interface API library on Dialogic® DM3 Boards.

Appendix A lists returns and defines associated with the Dialogic® Standard Runtime Library (SRL) that are unique to digital network interface devices.

Appendix B outlines the various message blocks and templates used with the various digital network interface devices.

Appendix C gives an example of the *dticas.h* header file.

Appendix D lists related publications.

A **Glossary** and an **Index** follow the appendixes.

2. General Description

The Dialogic® Digital Network Interface API library allows a programmer to design application programs that run on a host PC and work with one or more Dialogic® Digital Network Interface Boards. The provided functions control the digital network interface device on the SCbus and the network external interface to network circuits that meet either the T1 or E1 telephony standard.

This release includes Dialogic® Standard Runtime Library (SRL) functions used in network applications to perform such tasks as event management. SRL functions for network applications are documented in *Appendix A – Dialogic® Standard Runtime Library* of this guide. For a complete explanation of the SRL, see the Dialogic® Standard Runtime Library documentation.

2.1. Typical Applications

The type of applications supported by your software is dependent on the physical configuration of the host PC system. For instance, a program that will run with a Dialogic® Digital Network Interface Board and other devices arranged in **terminate configuration** allows your system to act as a standalone voice processing node. Applications for this configuration include:

- Central-office-based voice mail
- Cellular messaging
- Audiotex
- Service bureaus

A program designed to run with multiple Dialogic® Digital Network Interface Boards arranged in **drop-and-insert configuration** allows individual channels to terminate at a voice processing device, pass transparently to the network, or both. Applications for this configuration include all the terminate applications plus:

- Operator services such as billing automation, directory assistance, and intercept treatments
- Telemarketing
- Agent automation
- Direct dial-in (DDI) service

2.2. Compatibility

This section describes compatibility of the Dialogic® Digital Network Interface software with Dialogic® hardware and existing applications based on the Digital Network driver.

Some functions in the Dialogic® Digital Network Interface API library may operate differently or not at all on a given Dialogic® Digital Network Interface Board type due to differences in the board's usage. This section explains these differences in functionality.

- **dt_dial()** is supported by the Dialogic® D/240SC-T1, D/240SC-2T1, D/300SC-E1, D/300SC-2E1, D/480SC-2T1, and D/600SC-2E1 Boards.

NOTE: To perform dialing you can instead use a Dialogic® Voice Library function supported by your D/xxx Voice Boards. The function name is **dx_dial().**

- **dt_open()** opens time slots from 1 to 24 in T1 applications (Dialogic® D/240SC-T1 Boards) or 1 to 30 in E1 applications (Dialogic® D/300SC-E1 Boards).
- **dt_getctinfo()** is used to return device information for an on-board digital network interface device time slot.
- **dt_getxmitslot()** returns the SCbus time slot number connected to the transmit of a digital network time slot.
- **dt_listen()** is used to connect the receive of a digital network time slot to an SCbus time slot.
- **dt_unlisten()** is used to disconnect the receive of a digital network interface device time slot from the SCbus.
- **dt_setalarm()** DTA_DROP parameter is not supported by E1 compatible Dialogic® Digital Network Interface Board devices. For these devices, use only DTA_NONE or DTA_TERM.
- **dt_setevtmsk()** and **dt_getevtmsk()** functions include the DTG_PDIGEVVT parameter and also include additional parameters and masks for E1 alarm handling (Dialogic® D/300SC-E1 Boards only) and for T1 alarm handling (Dialogic® D240/SC-T1 Boards only). See the function descriptions in *Chapter 5. Function Reference* for more information.

2. General Description

- **dt_setsigmod()** transparent signaling mode is not supported in SCbus configurations.
- **dt_xmitalarm()** function uses additional parameters for E1 alarm transmission (Dialogic® D/300SC-E1 Boards only).

The library also supports the Dialogic® MSI/SC and DCB/SC Boards. Refer to the references listed in *Appendix D - Related Publications* of this guide for more information about functions supported on these boards.

2.3. SCbus Overview

SCbus is the TDM (Time Division Multiplexed) bus connecting SCSA (Signal Computing System Architecture) voice, telephone network interface, and other technology resource boards together.

SCbus boards are treated as board devices with on-board voice and/or telephone network interface devices which are identified by a board and channel (time slot for digital network channels) designation, such as a voice channel, analog channel, or digital channel.

Dialogic® Digital Network Interface Software Reference

3. Digital Telephony Overview

This chapter provides a brief overview of T1 and E1 concepts and a description of how Dialogic® hardware works in T1 and E1 environments.

NOTE: It is beyond the scope of this guide to explain all the details of T1 and E1 digital telephony. For more detailed information, refer to the related publications listed in *Appendix D - Related Publications*.

3.1. T1 Digital Telephony

A T1 circuit is used to transfer digital information in a two-way, full duplex connection at a speed of 1.544 megabits per second (Mbps). In a T1 environment, this rate is known as *digital signal level 1* or DS-1. A T1 circuit contains 24 voice channels, each operating at a rate of 64,000 bits per second (bps), a rate known as *digital signal level 0* or DS-0. The formula used to calculate the DS-1 rate of 1.544 Mbps includes an extra 8,000 bits that are not part of the voice data but used to synchronize the data received and transmitted on the T1 circuit.

<u>64,000 bps</u>	(Voice Channel Rate, DS-0)
<u>24</u>	(Number of Voice Channels)
<u>1,536,000 bps</u>	
<u>+ 8,000</u>	(Controlling Bits)
<u>1,544,000</u>	(T1 Circuit Rate, DS-1)

The T1 compatible digital network interface boards de-multiplex the 24 voice channels on a T1 circuit and pass them on to associated hardware (such as a voice board or other resource sharing module).

3.1.1. T1 Frame Format

Digital data on a T1 line is organized into D4 frames. A D4 frame consists of a single 8-bit sample from each of the 24 voice channels and one framing bit, for a total of 193 bits. Each 8-bit sample occupies what is known as a time slot within the frame. *Figure 1* shows one D4 frame.

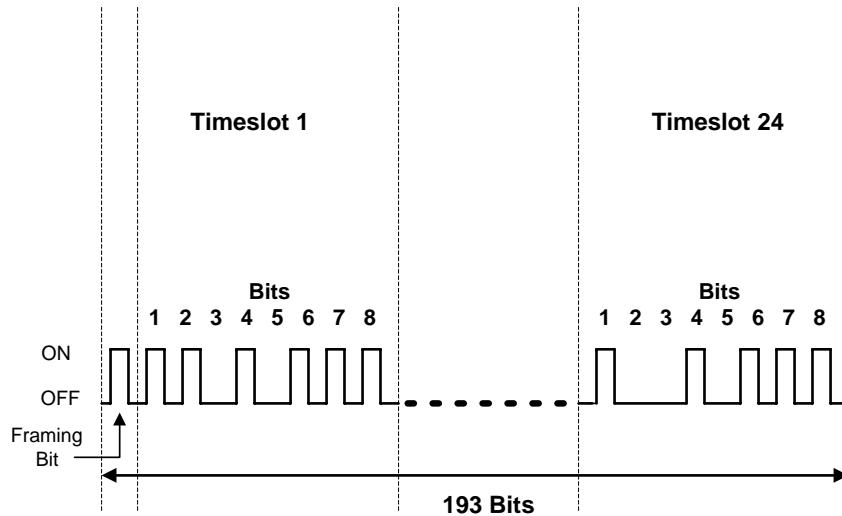


Figure 1. D4 Frame Format

The term *time slot* is derived from the method that is used to multiplex the 24 voice channels in a D4 frame. The channels are byte-interleaved in a frame. That is, each byte is a sample from a different voice channel and occurs in a fixed pattern within the frame (voice channel one in time slot one, voice channel two in time slot two, etc.). All D4 frames have the same pattern. This technique of interleaving is called time division multiplexing.

Twelve D4 frames make up what is known as a D4 superframe. *Figure 2* shows a single D4 superframe, indicating the framing bit values of the individual D4 frames. The framing bits are used for frame synchronization, which is described in more detail in *Section 3.1.2. T1 Synchronization*.

3. Digital Telephony Overview

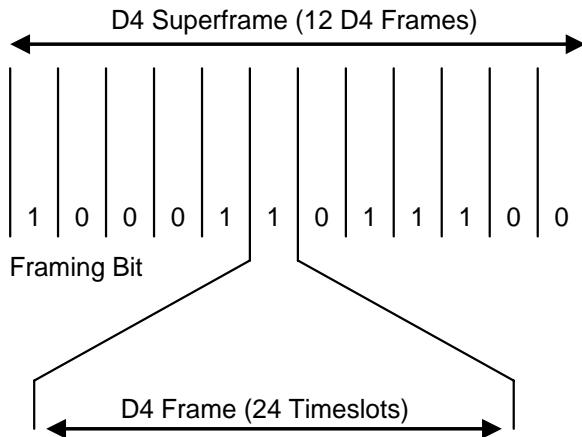


Figure 2. D4 Superframe Format

3.1.2. T1 Synchronization

To identify DS-0 voice channels for the receiver, the data being transferred must be synchronized. This capability is built into the D4 frame and superframe formats for T1 systems. Each D4 frame in a superframe begins with a *framing bit*. The 12 framing bits in a D4 superframe are arranged in a predefined pattern: 100011011100. By searching for this pattern, the T1 compatible digital network interface hardware can determine the beginning and end of every D4 superframe, D4 frame, and time slot. When this pattern cannot be found, the resulting error is known as Receive Loss of Synchronization (RLOS). See *Section 3.3.2. Loss of Synchronization Alarm Handling* for information on T1 alarm handling.

3.1.3. T1 Signaling

T1 signaling information (on-hook and off-hook states) must be carried on a T1 line. Signaling is accomplished using two bits called the A-bit and the B-bit. Each time slot in the sixth frame of the D4 superframe has the least significant bit replaced with signaling information. These are the A-bits. Similarly, each time slot in the 12th frame of the D4 superframe has the least significant bit replaced with signaling information. These are the B-bits. This strategy of replacing the least significant bit with signaling information is called robbed-bit signaling.

For example, in E&M (Ear and Mouth) protocol the signaling bits indicate whether the sending party's line is on-hook or off-hook. When the signaling bits are 0s, the line is on-hook, and when the signaling bits are 1s, the line is off-hook.

NOTE: Some T1 services reverse these values or use them in different patterns or protocols. Check with your T1 supplier to verify the A-bit and B-bit values for your T1 service.

3.2. E1 Digital Telephony

An E1 circuit is a digital two-way connection operating at a speed of 2.048 Mbps. This rate is achieved by combining 32 time slots operating at a rate of 64 Kbps.

$$\begin{array}{rcl} & 64,000 \text{ bps} & (\text{Individual Voice Channel Rate}) \\ \times & 32 & (\text{Number of Channels or Time Slots}) \\ \hline & 2,048,000 & (\text{E1 Circuit Rate}) \end{array}$$

These 32 time slots include 30 time slots available for up to 30 voice channels, one time slot dedicated to carrying frame synchronization information (time slot 0), and one time slot dedicated to carrying signaling information (time slot 16). The E1 compatible digital network interface boards de-multiplex the 30 voice channels and pass them on to E1 compatible resource modules.

NOTE: E1 is used to refer to the 2.048 Mbps Digital Service with Channel Associated Signaling (CAS). This service is available in Europe and some parts of Asia.

3.2.1. E1 Frame Format

On an E1 circuit, data is organized into frames on a byte-interleaved basis. Data is taken from each voice channel a byte at a time. The resulting E1 frame contains 32 time slots: one to carry frame synchronization information, one to carry signaling information, and 30 to carry voice channel data. Each time slot contains 8 bits, for a total of 256 bits per frame. *Figure 3* illustrates the structure of an E1 frame.

3. Digital Telephony Overview

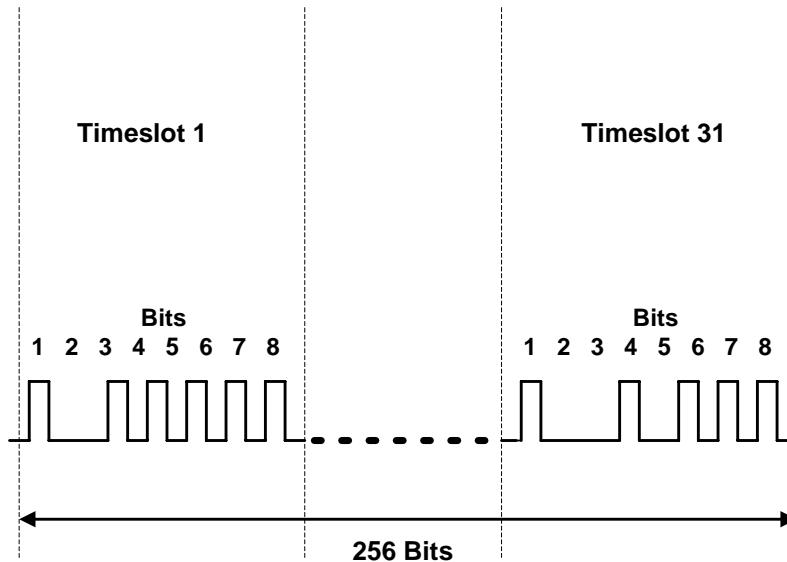


Figure 3. E1 Frame Format

E1 frame format numbers time slots from 0 to 31.

E1 frames 0 through 15 are combined into one *multiframe*. Figure 4 illustrates the structure of an E1 multiframe.



Figure 4. E1 Multiframe Format

3.2.2. E1 Synchronization

Time slot 0 of each frame (frames 0 through 15 of a multiframe) carries the information needed to identify voice channels for the receiver on E1 systems. The pattern carried by time slot 0 alternates between two patterns: the first is a 7-bit pattern (0011011) in bit positions 6 through 0 and the second is a pattern of national and international bits with a single 1-bit in bit position 6. *Figure 5* shows the alternating bit patterns in odd and even frames.

Figure 5. Individual Frame Synchronization

See Section 3.2.4. E1 National and International Bits for an explanation of the E1 national and international bits pictured in Figure 5.

Frame 0 (the first frame within an E1 multiframe) contains additional synchronization information to identify the beginning of a multiframe. The beginning is identified by a pattern of four zeros in bit positions 7 through 4 of time slot 16, frame 0. *Figure 6* illustrates the bit pattern found in time slot 16 of frame 0.

3. Digital Telephony Overview

Time Slot 16 of Frame 0

Bit Position	MSB								LSB
	7	6	5	4	3	2	1	0	
	0	0	0	0	X	Y	X	X	

X - Extra Bits, Used for Multi-frame Synchronization

Y - Distant Multi-frame Alarm Bit

Figure 6. Multiframe Synchronization

If these frame or multiframe bit patterns cannot be found, the resulting error is known as a Frame Sync Error (FSERR) or Multiframe Sync Error (MFSERR). If either an FSERR or MFSERR error is detected, a remote alarm or a distant multiframe alarm is sent to the remote end. The condition exists until synchronization is recovered. See *Section 3.3.2. Loss of Synchronization Alarm Handling* for information on E1 alarm handling.

3.2.3. E1 Signaling

The Conference of European Postal and Telecommunications administrations (CEPT) defines how bits of a PCM carrier system in E1 areas will be used and in what sequence. E1 circuits use the Channel Associated Signaling (CAS) protocol. Frames using CAS share time slot 16, which carries signaling information for two time slots or voice channels at a time.

Time slot 16 contains two groups of four bits, known as nibbles, that are designated the upper nibble and the lower nibble. Two channels send their signaling bits in each frame — one using the upper nibble, the other using the lower nibble. As explained in *Section 3.2.1. E1 Frame Format*, it takes 15 frames to carry signaling information for each of the 30 voice channels.

Time slot 16 of frame 0 carries a special pattern. The upper nibble carries a pattern of four 0s, which identifies the frame as frame 0 of an E1 multiframe.

The lower nibble of time slot 16 in frame 0 carries a pattern of extra bits and an alarm bit. The X bits pictured in *Figure 6* are the extra bits used for multiframe synchronization (see *Section 3.2.2. E1 Synchronization*). The Y bit pictured in *Figure 6* is the distant multiframe alarm bit (see *Section 3.3.2. Loss of Synchronization Alarm Handling*).

Time slot 16 of frame 1 in an E1 multiframe carries signaling information for the first and 16th channels. Time slot 16 of frame 2 in an E1 multiframe carries signaling information for the 2nd and the 17th channels. This continues until frame 15 which carries signaling information for the 15th and 30th channels, as shown in *Figure 7*.

Time Slot 16

Time Slot 16							
MSB				LSB			
7 6 5 4 (Upper Nibble)				3 2 1 0 (Lower Nibble)			
D C B A				D C B A			
Frame 0:	0	0	0	0	0	0	0
Frame 1:	Voice Channel 1			Voice Channel 16			
Frame 2:	Voice Channel 2			Voice Channel 17			
Frame N:	Voice Channel N			Voice Channel N + 15			
Frame 15:	Voice Channel 15			Voice Channel 30			

Figure 7. Channel Associated Signaling (CAS) Protocol

3. Digital Telephony Overview

Caution

Do not set signaling bits ABCD to 0000. As explained in *Section 3.2.2. E1 Synchronization*, this setting is used to identify frame 0 of an E1 multiframe.

Clear Channel TS16 Feature

The Clear Channel TS16 feature allows the use of time slot 16 for data on E1 interface boards. This feature is enabled or disabled by adding one of the following lines to */usr/dialogic/cfg/dialogic.cfg*:

```
FEATURES = TS16_CLEAR
```

This command selects Clear Channel Time Slot 16 (CCTS16) for E1 interface boards, ignores E1 signaling received from the network on time slot 16, and transmits FFH. Access to time slot 16 is not available.

```
FEATURES = TS16_SIG
```

This command specifies that the E1 interface board will use the default of E1 signaling on time slot 16.

3.2.4. E1 National and International Bits

National and international bits are set in time slot 0. The most significant bit (bit position 7) in time slot 0 of each frame contains the international bit. The national bits occupy bit positions 0 through 4 of time slot 0 of every second frame. *Figure 8* shows national and international bit settings.

TIME SLOT0								
BIT POSITION	7	6	5	4	3	2	1	0
ODD FRAME	I	0	0	1	1	0	1	1
EVEN FRAME	I	1	-	N	N	N	N	N

I - INTERNATIONAL BIT N - NATIONAL BIT

Figure 8. E1 National and International Bits

3.3. Digital Network Interface Hardware Implementation

The following sections describe features of the digital network interface hardware implementation that are important to note for purposes of application development.

3.3.1. SCbus Routing

Data is transmitted over the SCbus in 1024 time slots. At system initiation and download, the number of devices (analog interface, voice, digital network interface, facsimile, etc.) on each board and the number of SCbus time slots required to service these devices are determined. Only one digital network interface device time slot can transmit on a specific SCbus time slot at a time. To assure this, the transmit of each device is assigned to a specific and unique SCbus time slot at system initialization. This transmit assignment cannot be changed by the application.

When both voice and telephone network digital interface devices (T1/E1) are on a single SCbus board, these resources are treated as separate and independent devices.

3.3.2. Loss of Synchronization Alarm Handling

The most critical error condition that can occur on a T1 or E1 line is Receive Loss of Synchronization (RLOS). This section describes the alarm conditions and

3. Digital Telephony Overview

signals associated with digital network interface alarm handling and how they are indicated on a digital network interface board.

T1 Alarm Handling

For T1 applications, the T1 compatible digital network interface boards generate three alarm conditions to indicate RLOS:

- Red alarm
- Yellow alarm
- Blue alarm

A **red alarm condition** occurs when RLOS has existed for 2.5 seconds (default) on incoming data. This condition will exist until the synchronization has been recovered and remains recovered for 12 seconds (default).

A **yellow alarm** is sent by the receiving T1 digital network interface device to the transmitter device. The yellow alarm indicates to the transmitter device that a red alarm condition exists at the receiver device. The yellow alarm is sent for as long as the red alarm condition exists at the receiver device.

NOTE: A yellow alarm is sent by the T1 digital network interface receiver device by inserting a zero in bit 2 of all time slots.

The **blue alarm** is a “keep alive” signal. When the T1 digital network interface device is used in a drop and insert configuration and it receives an RLOS for 2.5 seconds, a red alarm condition is entered on the T1 digital network interface side that received the RLOS. The configuration then transmits a blue alarm signal from the other digital network interface connected via the SCbus cable to its T1 span. The blue alarm signal informs the receiving station that there is a problem on the line and allows the receiving station to continue to derive its transmit clock from the received signal.

NOTE: The blue alarm signal causes an RLOS on the T1 digital network interface device that receives the blue signal. A blue alarm consists of an unframed pattern of 1s.

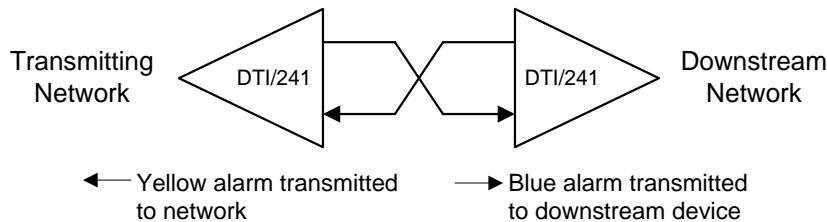


Figure 9. T1 Alarm Conditions

E1 Alarm Handling

For E1 applications, the E1 compatible digital network interface boards generate four alarm conditions to indicate loss of synchronization (FSERR or MFSERR):

- Remote alarm
- Unframed all 1s alarm
- Distant multiframe alarm
- Signaling all 1s alarm

A **remote alarm** is generated by the E1 compatible digital network interface device to indicate it has detected a loss of frame synchronization on the receive line (FSERR condition). The remote alarm is transmitted to the E1 network. A remote alarm is returned to the network by setting bit 3 of time slot 0 in non-alignment frames to 1. (“Non-alignment frames” are those frames not carrying the 7-bit frame-sync pattern 0011011 in time slot 0.)

If the E1 compatible digital network interface device is in a drop-and-insert configuration, it also generates an **unframed all 1s alarm**. The unframed all 1s alarm is transmitted to the downstream device to indicate that the data it is receiving is unsynchronized at the frame level and is therefore unreliable. The downstream device must then transmit this alarm to the downstream network.

When the E1 compatible digital network interface device detects a recovery of frame synchronization, it will stop transmitting the remote and unframed all 1s alarms.

A **distant multiframe alarm** is generated by the E1 compatible digital network interface device to indicate it has detected a loss of multiframe synchronization

3. Digital Telephony Overview

on the receive line (MSFERR condition). The distant multiframe alarm is transmitted to the E1 network. The digital network interface device returns a distant multiframe alarm by setting the bit in position 2 of time slot 16 in frame 0 to 1.

If the E1 compatible digital network interface device is in a drop-and-insert configuration, it also generates a **signaling all 1s alarm**. A signaling all 1s alarm is generated by inserting all 1s in time slot 16. The signaling all 1s alarm is transmitted to the downstream device to indicate that the data it is receiving is unsynchronized at the multiframe level and is therefore unreliable. The downstream device must then transmit this alarm to the downstream network.

When the E1 compatible digital network interface device detects a recovery of multiframe synchronization, it will stop transmitting the distant multiframe and signaling all 1s alarms.

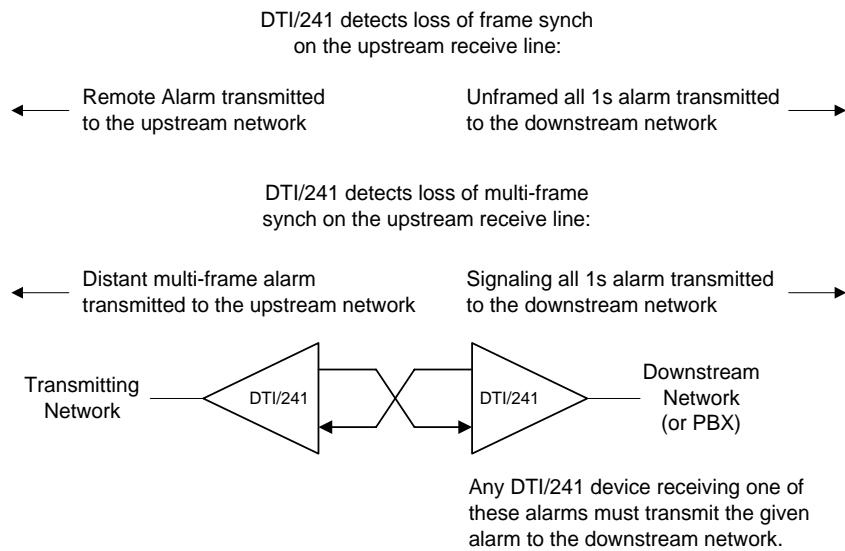


Figure 10. E1 Loss of Synchronization Alarm Requirements

3.3.3. Digital Network Interface Hardware Alarm Indicators

The three LEDs on the rear bracket of the digital network interface board indicate the state of the signal being received. All LED indicators will remain lit until the digital network interface firmware is downloaded to the device.

Red LED: The red LED lights up whenever the digital network interface device detects RLOS.

Yellow LED: A yellow LED lights up whenever the digital network interface device receives an alarm indicating that a network span is receiving unsynchronized data from the digital network interface board.

Green LED: A green LED is lit whenever the digital network interface board is receiving a signal.

- NOTES:**
- 1.** Red, yellow, and green LEDs will be lit when the system is powered up, regardless of whether a signal is being received.
 - 2.** No alarm handling is performed until digital network interface boards are downloaded.
 - 3.** Once the firmware is downloaded, the default alarm handling mode for digital network interface boards is terminate alarm handling [see **dt_setalarm()**].

4. Function Overview

This chapter describes the Dialogic® Digital Network Interface API library functions that control the digital network interface hardware. A complete reference describing these functions in detail is located in *Chapter 5. Function Reference*.

4.1. Dialogic® Digital Network Interface API Library Function Categories

The Dialogic® Digital Network Interface API library functions provide the building blocks to create voice applications using T1 or E1 lines. These functions can be divided into the following categories:

- **Alarm functions** - control T1 or E1 alarm handling
- **Diagnostic functions** - test digital network interface hardware
- **Extended Attribute functions** - retrieve device-specific attribute data
- **Parameter Request functions** - request device parameters
- **Parameter Setting functions** - set device parameters
- **Resource Management functions** - open and close digital network interface devices
- **Routing functions** - generate communication between devices connected to time slots
- **Statistics functions** – return the statistics queried
- **Time Slot Audio functions** - generate audio signals on time slots
- **Time Slot Signaling functions** - alter signaling portion of time slot

For Dialogic® Digital Network Interface API library support on Dialogic® DM3 Boards, see *Chapter 7. Dialogic® Digital Network Interface API for Dialogic® DM3 Boards*.

NOTE: Many Digital Network Interface library functions can operate in either *synchronous* mode or *asynchronous* mode. Synchronous functions do not return control to the calling process until the function call is completed. To operate a function in *asynchronous* mode, your application must include an event handler to trap and process the completion event.

Each category and its functions are briefly described in the following sections.

4.1.1. Alarm Functions

- **dt_setalarm()** - set alarm handling mode
- **dt_xmitalarm()** - start/stop alarm transmission

The Alarm functions allow your application to control the way T1 or E1 alarms are handled. The **dt_setalarm()** function sets the alarm-handling mode. The **dt_xmitalarm()** function starts and stops the transmission of alarms.

For a detailed discussion of T1 and E1 alarm handling, refer to *Chapter 3. Digital Telephony Overview*.

4.1.2. Diagnostic Functions

- **dt_rundiag()** - run diagnostics on network firmware
- **dt_tstcom()** - test board interface communications
- **dt_tstdat()** - run data test on board device

The Diagnostic functions check the network firmware and hardware. The **dt_rundiag()** function runs diagnostics on the network firmware and the other two functions test the hardware. The **dt_tstcom()** function tests communication between the PC and the digital network interface device. The **dt_tstdat()** function tests the reliability of data transfer between the PC and the digital network interface device.

4.1.3. Extended Attribute Functions

- **ATDT_BDMODE()** - board signaling mode (all time slots)
- **ATDT_BDSGBT()** - board signaling bits (all time slots)
- **ATDT_DNLVER()** - downloaded network firmware version
- **ATDT_IDLEST()** - time slot idling state
- **ATDT_ROMVER()** - EPROM version
- **ATDT_STATUS()** - time slot status
- **ATDT_TSMODE()** - get time slot signaling mode
- **ATDT_TSSGBT()** - get time slot signaling bits

4. Function Overview

Standard Attribute functions, which are contained in the Dialogic® Standard Runtime Library (SRL, see *Appendix A – Dialogic® Standard Runtime Library*), provide generic information about a device, such as its name or the status of the last function call of the device. **Extended Attribute** functions return device specific information. The Digital Network Interface library Extended Attribute functions return information about digital network interface logical board and time slot devices.

Extended Attribute function error handling is similar to that of other Digital Network Interface library functions. Most Extended Attribute functions return AT_FAILURE on error. One Extended Attribute function, **ATDT_BDSGBT()**, returns the value AT_FAILUREP on error. Refer to *Section 4.2. Error Handling* for information about retrieving errors.

4.1.4. Parameter Request Functions

- **dt_getparm()** - get device parameter
- **dt_getevt()** - blocks and returns control after event
- **dt_getevtmsk()** - get device event bitmask

Parameter Request functions are used to check the status of network parameter and event mask settings.

4.1.5. Parameter Setting Functions

- **dt_setparm()** - change device parameter
- **dt_setevtmsk()** - change device event mask

The Parameter Setting functions set network device parameters and masks used for event management.

4.1.6. Resource Management Functions

- **dt_open()** - open board or time slot device
- **dt_close()** - close board or time slot device

Resource Management functions open and close devices. Before you can perform an operation on a device, the device must be opened. The **dt_open()** function

returns a unique device handle. All subsequent operations on the device must use this handle.

- NOTES:**
- 1.** A device handle is NOT the same as a system file handle.
 - 2.** Opening or closing a digital network interface device does not affect other processes using the device. (See *Chapter 6. Application Guidelines*, for more information on opening and using DTI devices.)
 - 3.** The value returned by **dt_open()** for a digital network interface logical board is referred to as a *logical board device handle* in this guide.

4.1.7. Routing Functions

- **dt_getctinfo()** - get information about the digital network interface time slot device connected to the SCbus
- **dt_getxmitslot()** - returns SCbus time slot connected to the digital network interface time slot device
- **dt_listen()** - connects the receive of a digital network interface time slot device to an SCbus time slot
- **dt_unlisten()** - disconnects the receive of a digital network interface time slot device from an SCbus time slot

Routing functions enable the application to make or break a connection between voice, telephone network interface, and other resource channels connected via SCbus time slots.

4.1.8. Statistics Functions

- **dt_getstatistics()** – return the statistics queried

The **dt_getstatistics()** function returns the statistics queried. The application must specify the type of statistics to be queried in the **TsdtStatisticsList** structure.

4.1.9. Time Slot Audio Functions

- **dt_setidle()** - enable/disable time slot idle state

4. Function Overview

A Time Slot Audio function affects only the transmitted audio portion of a time slot. It replaces the normal voice data on the audio portion of a time slot with other data. The **dt_setidle()** function transmits an idle pattern (digital equivalent of silence) on the selected digital network interface time slot. The specific idle pattern transmitted can be specified via the download configuration file or by using the **dt_setparm()** function.

4.1.10. Time Slot Signaling Functions

- **dt_dial()** - dial a pulse digit string
- **dt_setsigmod()** - change time slot transmit signaling mode
- **dt_settssig()** - change time slot signaling bits
- **dt_settssigsim()** - clear and set signaling bits simultaneously
- **dt_xmitwink()** - transmit wink signaling

Time Slot Signaling functions affect the transmitted signaling portion of a time slot. The **dt_setsigmod()** function selects the origin of the signaling information. The signaling information can either be inserted by the digital network interface hardware or derived (by way of the SCbus) from an SCbus compatible resource device (such as a Dialogic® D/240SC-T1 Board) or another network device. The **dt_settssig()** function sets the state of the signaling bits when the signaling information is inserted by the Dialogic® Digital Network Interface Board (signaling insertion mode). The **dt_xmitwink()** function transmits wink signaling to the network on any of the available signaling bits (for T1, bit A or B; for E1, bit A, B, C, or D).

- NOTES:**
- 1.** The signaling bit and polarity used for wink signaling are only configurable through the download parameter file.
 - 2.** If your configuration includes Dialogic® Voice Boards, you can use the Dialogic® Voice Library function **dx_dial()** instead.

4.2. Error Handling

All Dialogic® Digital Network Interface Library functions return a value that indicates the success or failure of the function call. Generally, Digital Network Interface Library functions return the following values:

- **0** - function success
- **-1** - general error
- **AT_FAILURE** - Extended Attribute function error from a function that returns a value
- **AT_FAILUREP** - Extended Attribute function error from a function that returns a pointer

If a function fails, the error code can be retrieved using the Dialogic® Standard Runtime Library (SRL) **ATDV_LASTERR()** function. The error codes are defined in *dtilib.h* and listed in *Table 1*.

- NOTES:**
1. The network **dt_open()** function call returns a device handle if the function call is successful. A device handle is a positive non-zero value. If **dt_open()** fails, the return code is -1 and the specific error is a system error that can be found in the global variable **errno**, contained in *errno.h*.
 2. The **ATDT_BDSGBT()** function call returns the value **AT_FAILUREP** on error. All other Extended Attribute functions return **AT_FAILURE** on error.
 3. The SRL Standard Attribute functions **ATDV_LASTERR()** and **ATDV_ERRMSGP()** can be used to obtain the status of the last function call of the device. Refer to *Appendix A – Dialogic® Standard Runtime Library* for more information.
 4. If the error returned by **ATDV_LASTERR()** is **EDT_SYSTEM**, a system error has occurred. Check the value of the global variable **errno** defined in *errno.h*.

4. Function Overview

Table 1. Error Types Defined in *dtilib.h*

Error Returned	Description
EDT_ABORT	abort received response
EDT_ADDRS	bad address
EDT_BADCMDERR	invalid or undefined command to driver
EDT_BADCNT	count of bytes requested is bad
EDT_BADDEV	bad device error
EDT_BADGLOB	bad global (device) parameter number
EDT_BADPORT	1st byte appeared on reserved port
EDT_BADVAL	invalid parameter value passed in value pointer
EDT_BITBSY	bit is already set
EDT_CHKSUM	bad checksum
EDT_DATTO	data reception timed out
EDT_DTTSTMOD	in test mode; cannot set DTI/2xx mode
EDT_FWERR	firmware returned an error
EDT_INVBD	invalid DTI/2xx logical board device handle
EDT_INVCFG	invalid configuration area or EEPROM configuration data
EDT_INVMSG	invalid message
EDT_INVSIGST	invalid signaling state
EDT_MBFFMT	wrong number of bytes for multiple byte request
EDT_MBIMM	received an immediate termination
EDT_MBINV	1st byte appeared on data port
EDT_MBOVR	message was too long, overflow
EDT_MBPORT	received multiple byte data on port other than 0 or 1
EDT_MBTERM	terminating byte other than FEH or FFH

Error Returned	Description
EDT_MBUND	under the number of bytes for a multibyte request
EDT_MSGCNT	count received did not match actual count
EDT_MTSIG	cannot disable insertion
EDT_NOIDLEERR	time slot is not in idle/closed state
EDT_NOMEMERR	cannot map or allocate memory in driver
EDT_NOTDNLD	not downloaded
EDT_NOTSACS	cannot use tsacs on the device
EDT_NOWTCALL	not waiting for a call
EDT_PARAMERR	invalid parameter
EDT_PDOFFHK	wink bit not in correct initial state
EDT_PDSIG	cannot disable insertion
EDT_RANGEERR	bad/overlapping physical memory range
EDT_SH_BADEXTTS	external time slot unsupported at current clock rate
EDT_SH_BADINDX	invalid switching handler index number
EDT_SH_BADLCLTS	invalid local time slot number
EDT_SH_BADMODE	invalid bus mode
EDT_SH_BADTYPE	invalid local time slot type
EDT_SH_LCLDSCNCT	local time slot already disconnected from SCbus
EDT_SH_LCLTSCNCT	local time slot already connected to SCbus
EDT_SH_LIBBSY	switching handler library is busy
EDT_SH_LIBNOTINIT	switching handler library has not been initialized
EDT_SH_MISSING	switching handler is not present
EDT_SH_NOCLK	clock fallback failed
EDT_SIGINS	signaling insertion not enabled
EDT_SIGTO	transmit/receive did not update in time
EDT_SIZEERR	message too big or too small

Error Returned	Description
EDT_SKIPRPLYERR	a required reply was skipped
EDT_STARTED	cannot start when already started
EDT_SUCC	no error
EDT_SYSTEM	system error - check the global variable errno for more information about the error
EDT_TMOERR	timed out waiting for reply from firmware
EDT_TSASN	time slot already assigned
EDT_TSBSY	time slot is busy

4.3. Include Files

The Dialogic® Digital Network Interface API library function prototypes and defines are listed in the *dtplib.h* file supplied with this release. Applications that use these library functions must include the following statements:

```
#include <windows.h>      /* For Windows applications only */  
#include <srlib.h>  
#include <dtplib.h>
```

To perform error handling in your routines, your source code must include the following line:

```
#include <errno.h>
```

Code that uses voice devices and voice driver with digital network interface devices must include the following statements, in the following order:

```
#include <windows.h>      /* For Windows applications only */  
#include <srlib.h>  
#include <dxllib.h>  
#include <dtplib.h>  
#include <errno.h>
```

The *dtixxx.h* file includes many defines, including NTT_CAS_TEMPLATE_MATCH and NTT_CAS_TEMPLATE_SEND_END.

Dialogic® Digital Network Interface Software Reference

5. Function Reference

This chapter contains an alphabetical listing of all Dialogic® Digital Network Interface API Library functions. Extended Attribute functions, also contained in the Digital Network Interface Library, are described here as well. (Because the functions appear alphabetically, the Extended Attribute functions are located together near the front of the reference.) For information about Standard Attribute functions, refer to *Appendix A – Dialogic® Standard Runtime Library*.

For Digital Network Interface Library support on Dialogic® DM3 Boards, see *Chapter 7. Dialogic® Digital Network Interface API for Dialogic® DM3 Boards*.

NOTE: Unless otherwise noted, all functions listed in this section apply to both Linux and Windows® operating systems.

ATDT_BDMODE() *returns the current mode of every time slot*

Name:	long ATDT_BDMODE(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical board device handle
Returns:	signaling mode of all digital network interface time slots AT_FAILURE if failure
Includes:	srlib.h dtlib.h
Category:	Extended Attribute
Mode:	synchronous

■ Description

The **ATDT_BDMODE()** function **returns the current mode of every time slot** on the specified digital network interface device.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()

For T1 applications, the mode is returned as a long integer where bits 0 to 23 represent the mode of digital network interface time slots 1 to 24.

For E1 applications, the mode is returned as a long integer where bits 0 to 29 represent the mode of digital network interface time slots 1 to 30.

The following signaling mode defines are provided in *dtlib.h*:

- DTM_SIGINS - signaling insertion mode (digital network interface board generates signaling to network)

To determine the mode of a time slot, compare the returned value with the provided defines.

■ Cautions

1. This function will fail if an invalid digital network interface logical board device handle is specified.
2. For returned values to be valid, you must call **dt_setsigmod()** first.
3. Wink signaling cannot be transmitted on a voice device channel (see the *Dialogic® Voice API Library Reference* and the *Dialogic® Voice API Programming Guide*).

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srlib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;           /* Board device handle */
    long modebits;     /* Mode of all time slots */
    int i;              /* Loop counter */
/*
 * Open board 1 device
 */
    if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiB1.  errno = %d", errno );
        exit( 1 );
    }
/*
 * Get the signaling mode of all E-1 time slots (1 to 30)
 */

    if ( ( modebits = ATDT_BDMODE( devh ) ) == AT_FAILURE ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
/*
 * Display it
 */
    for ( i = 0; i < 30; i++ ) {
        switch( ( modebits >> i ) & 1 ) {
        case DTM_TRANS:
            printf( "Time slot %d on board 1 is in transparent mode\n", i + 1 );
            break;
        case DTM_SIGINS:
            printf( "Time slot %d on board 1 is in insertion mode\n", i + 1 );
            break;
        }
    }
}
.
```

ATDT_BDMODE()*returns the current mode of every time slot***■ Errors**

If the function returns AT_FAILURE, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSG()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_INVBBD** - invalid digital network interface logical board device handle
- **EDT_INVMMSG** - invalid message
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_BDSGBT()**
- **ATDT_TS MODE()**
- **ATDT_TSSGBT()**
- **dt_setsigmod()**
- **dt_settssig()**

returns the current state of the transmit and receive bits **ATDT_BDSGBT()**

Name:	char * ATDT_BDSGBT(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical board device handle
Returns:	pointer to signaling bit states of all device time slots AT_FAILUREP if failure
Includes:	srlib.h dtilib.h
Category:	Extended Attribute
Mode:	synchronous

■ Description

The **ATDT_BDSGBT()** function *returns the current state of the transmit and receive bits* for all time slots on the digital network interface device specified in **devh**.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()

For T1 applications, the returned value is a pointer to a 24-byte buffer. Bytes 0 to 23 represent T1 time slots 1 to 24.

For E1 applications, the returned value is a pointer to a 30-byte buffer. Bytes 0 to 29 represent E1 time slots 1 to 30.

ATDT_BDSGBT() returns the current state of the transmit and receive bits

The following symbols represent each signaling bit and are defined in *dtilib.h*:

- **DTSG_RCVA** - “A” receive signaling bit
- **DTSG_RCVB** - “B” receive signaling bit
- **DTSG_RCVC** - “C” receive signaling bit (E1 only)
- **DTSG_RCVD** - “D” receive signaling bit (E1 only)
- **DTSG_XMTA** - “A” transmit signaling bit
- **DTSG_XMTB** - “B” transmit signaling bit
- **DTSG_XMTC** - “C” transmit signaling bit (E1 only)
- **DTSG_XMTD** - “D” transmit signaling bit (E1 only)

To determine the state of the signaling bits, perform a logical AND operation on the byte buffer and the defines, as demonstrated in the example below.

■ Cautions

1. This function will fail if an invalid digital network interface logical board device handle is specified. AT_FAILUREP will be returned.
2. The transmit signaling bits are only valid when the device is in signaling insertion mode.

returns the current state of the transmit and receive bits ATDT_BDSGBIT()

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>

main()
{
    int devh;                  /* Board device handle */
    char *sigbits;             /* Pointer to signaling bits array */
    int i;                     /* Loop counter */
    int arcv, brcv, axmt, bxmt; /* Bit mask values */

/*
 * Open board 1 device
 */
if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
    printf( "Cannot open board dtiB1.  errno = %d", errno );
    exit( 1 );
}

/*
 * Get current transmit and receive signaling bits of all time slots
 */
if ( ( sigbits = ATDT_BDSGBIT( devh ) ) == AT_FAILUREP ) {
    printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
    exit( 1 );
}

/*
 * Display it
 */
for ( i = 0; i < 24; i++ ) {
    arcv = ( sigbits[ i ] & DTSG_RCVA ) ? 1 : 0;
    brcv = ( sigbits[ i ] & DTSG_RCVB ) ? 1 : 0;
    axmt = ( sigbits[ i ] & DTSG_XMTA ) ? 1 : 0;
    bxmt = ( sigbits[ i ] & DTSG_XMTB ) ? 1 : 0;
    printf( "tslot #%-d arcv = %-d, brcv = %-d, axmt = %-d, bxmt = %-d\n",
            i + 1, arcv, brcv, axmt, bxmt );
}
.
.
.
```

ATDT_BDSGBT() returns the current state of the transmit and receive bits

■ **Errors**

If the function returns AT_FAILUREP, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_INVMMSG** - invalid message
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ **See Also**

- **ATDT_BDMODE()**
- **ATDT_TS MODE()**
- **ATDT_TSSGBT()**
- **dt_setsigmod()**
- **dt_settssig()**

returns the firmware version **ATDT_DNLDVER()**

Name:	long ATDT_DNLDVER(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical board device handle
Returns:	version of firmware used by the device AT_FAILURE if failure
Includes:	srlib.h dtilib.h
Category:	Extended Attribute
Mode:	synchronous

■ Description

The **ATDT_DNLDVER()** function **returns the firmware version** downloaded to the device specified in **devh**. This number is returned in the standard version numbering format.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()

Version Numbering

A version number consists of two parts that provide:

1. The release TYPE (Example: Production or Beta)
2. The release NUMBER, which consists of different elements depending on the type of release, for example:
 - 1.00 Production
 - 1.00 Beta 5

NOTE: The examples above are shown in the convention used to display version numbers.

This function returns the version number as a long integer (32 bits) in BCD (binary coded decimal) format.

Figure 11 shows the format of the version number returned. Each section in the diagram represents a nibble (4 bits).

ATDT_DNLVER()

returns the firmware version

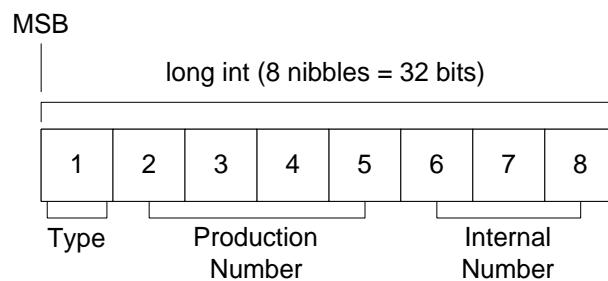


Figure 11. Firmware Version Number Format

Nibble 1 returns the type of release in BCD numbers. A converted value of 0 indicates a Production release and a converted value of 1 indicates a Beta release.

Nibbles 2, 3, and 4 return the Production Release Number.

NOTE: Nibbles 2 through 4 are used in all version numbers. Nibbles 5 through 8 only contain values if the release is not a production release.

Nibbles 5, 6, 7, and 8 return the Internal Release Number used for pre-production product releases. Nibbles 5 and 6 hold the product's Beta number. Nibbles 7 and 8 hold additional information used for internal releases.

Table 2 displays a breakdown of the values returned by each nibble in the long integer.

Table 2. ATDT_DNLDVER() Return Values

Nibble (4 bits)				
1	2	3 & 4	5 & 6	7 & 8
TYPE	PRODUCTION RELEASE NUMBER		INTERNAL NUMBER	
Production	Major Release No.	Minor Release No.	N/A	N/A
Beta	Major Release No.	Minor Release No.	Beta Number	N/A

Major and Minor Release Numbers

Major and minor release numbers distinguish major revisions from minor revisions to Production releases. The major number converts to a single digit integer that increments with each major revision to the release. The minor number converts to a two digit integer that increments with each minor revision to the release.

In decimal number format, the major number is the number before the decimal point, and the minor number is the number after the decimal point.

The following list gives examples of each type of release. The values used in these examples have been converted from the binary coded decimal numbers returned in the long integer and are displayed according to the convention.

- 1.00 Production
- 1.00 Beta 5

■ Cautions

This function will fail if an invalid digital network interface logical board device handle is specified.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <stdio.h>
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

void main()
{
    int bdev;
    long version;

    if ((bdev = dt_open("dtiB1", 0)) == -1) {
        printf("Error in dt_open\n");
    }

    /* Get the version number */
    version = ATDT_DNLVER(bdev);

    if (version == AT_FAILURE) {
        printf("ERROR in getting version #\n");
    }
    else {
        /* display the version # */
        printf("DTI version number is %x.%02x ",
               (int) ((version >>24)&0x0F), ((version >> 16)&0xFF));

        // check for the download type
        switch (version >> 28) {
        case 0:
            printf("beta %02x \n", ((version >> 16)&0xFF));
            break;
        case 1:
            printf("production\n");
            break;
        } // end switch
    }

    dt_close(bdev);
    printf("\nend of prog\n");
}
```

■ Errors

If the function returns AT_FAILURE, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_INVMSG** - invalid message
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_ROMVER()**

ATDT_IDLEST()	<i>returns the current idle state</i>
----------------------	---------------------------------------

Name:	long ATDT_IDLEST(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical time slot device handle
Returns:	idling state of time slot AT_FAILURE if failure
Includes:	srlib.h dtilib.h
Category:	Extended Attribute
Mode:	synchronous

■ Description

The **ATDT_IDLEST()** function **returns the current idle state** of the digital network interface time slot specified in **devh**. “Idling” transmits silence to the network for the selected time slot.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()

The following defines are provided in *dtilib.h*.

- **DTIS_ENABLE** - silence insertion is enabled
- **DTIS_DISABLE** - silence insertion is disabled

To determine if a time slot is idling, compare the value of the returned integer with the provided defines.

■ Cautions

This function will fail if an invalid digital network interface logical time slot device handle is specified.

■ **Example**

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>

main()
{
    int devh;                  /* Time slot device handle */
    long mode;                 /* Time slot idle state mode */

    /*
     * Open board 1 time slot 1 device
     */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Cannot open time slot dtiB1T1.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Get silence insertion mode
     */
    if ( ( mode = ATDT_IDLEST( devh ) ) == AT_FAILURE ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }

    switch ( mode ) {
    case DTIS_ENABLE:
        printf( "Time slot 1 on board 1 has silence insertion enabled\n" );
        break;
    case DTIS_DISABLE:
        printf( "Time slot 1 on board 1 has silence insertion disabled\n" );
        break;
    }
    .
    .
}
```

■ Errors

If the function returns AT_FAILURE, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_INVMMSG** - invalid message
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_setidle()**

returns the version of the EPROM

ATDT_ROMVER()

Name:	long ATDT_ROMVER(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical board device handle
Returns:	version of EPROM installed on digital network interface device AT_FAILURE if function fails
Includes:	srlib.h dtilib.h
Category:	Extended Attribute
Mode:	synchronous

■ Description

The **ATDT_ROMVER()** function returns the version of the EPROM that is installed on the digital network interface device specified in **devh**. This number is returned in the standard version numbering format. This function is not available on Dialogic® DIALOG/HD Boards.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open() .

Version Numbering

A version number consists of two parts that provide:

1. The release TYPE (Example: Production or Beta)
2. The release NUMBER, which consists of different elements depending on the type of release, for example:
 - 1.00 Production
 - 1.00 Beta 5

NOTE: The examples above are shown in the convention used to display version numbers.

This function returns the version number as a long integer (32 bits) in BCD (binary coded decimal) format.

ATDT_ROMVER()***returns the version of the EPROM***

Figure 12 shows the format of the version number returned. Each section in the diagram represents a nibble (4 bits).

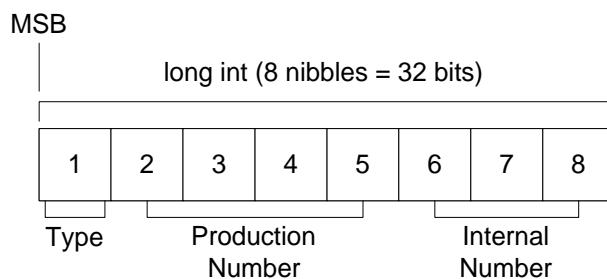


Figure 12. EPROM Version Number Format

Nibble 1 returns the type of release in BCD numbers. A converted value of 0 indicates a Production release and a converted value of 1 indicates a Beta release.

Nibbles 2, 3, and 4 return the Production Release Number.

NOTE: Nibbles 2 through 4 are used in all version numbers. Nibbles 5 through 8 only contain values if the release is not a production release.

Nibbles 5, 6, 7, and 8 return the Internal Release Number used for pre-production product releases. Nibbles 5 and 6 hold the product's Beta number. Nibbles 7 and 8 hold additional information used for internal releases.

Table 3 displays a breakdown of the values returned by each nibble in the long integer.

Table 3. ATDT_ROMVER() Return Values

Nibble (4 bits)				
1	2	3 & 4	5 & 6	7 & 8
TYPE	PRODUCTION RELEASE NUMBER		INTERNAL NUMBER	
Production	Major Release No.	Minor Release No.	N/A	N/A
Beta	Major Release No.	Minor Release No.	Beta Number	N/A

Major and Minor Release Numbers

Major and minor release numbers distinguish major revisions from minor revisions to Production releases. The major number converts to a single digit integer that increments with each major revision to the release. The minor number converts to a two digit integer that increments with each minor revision to the release.

In decimal number format, the major number is the number before the decimal point, and the minor number is the number after the decimal point.

The following list gives examples of each type of release. The values used in these examples have been converted from the binary coded decimal numbers returned in the long integer and are displayed according to the convention.

- 1.00 Production
- 1.00 Beta 5

■ Cautions

This function will fail if an invalid digital network interface logical board device handle is specified.

■ Example

```
#include <windows.h>          /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>

main()
{
    int devh;                  /* Board device handle */
    long version;               /* Version number of EPROM */

    /*
     * Open board 1 device
     */
    if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiB1.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Get the version number of the EPROM
     */
    version = ATDT_ROMVER( devh );
    if ( version == AT_FAILURE ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }

    /*
     * Display it
     */
    printf( "DTI/2xx EPROM version number is %d.%02x\n",
           (int)((version>>24)&0x0F), ((version >>16)&0xFF) );
    .
}

}
```

■ Errors

If the function returns AT_FAILURE, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_DNLVER()**

ATDT_STATUS()*returns the current status*

Name:	long ATDT_STATUS(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical time slot device handle
Returns:	status of time slot AT_FAILURE if failure
Includes:	srlib.h dtlib.h
Category:	Extended Attribute
Mode:	synchronous

■ Description

The **ATDT_STATUS()** function **returns the current status** of the digital network interface time slot specified in **devh**.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()

The following defines are provided:

- **DTST_INACTIVE** - time slot is idle
- **DTST_BUSY** - time slot is not idle

To determine the status of the time slot, compare the value of the returned integer with the defines listed above.

The time slot is considered busy if it is currently executing a multitasking function, for example, wink signaling.

■ Cautions

This function will fail if an invalid digital network interface logical time slot device handle is specified.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>

main()
{
    int devh;           /* Time slot device handle */
    long mode;          /* Current status of time slot */

    /*
     * Open board 1 time slot 1 device
     */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Cannot open time slot dtiB1T1.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Get current wink status of time slot
     */
    if ( ( mode = ATDT_STATUS( devh ) ) == AT_FAILURE ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }

    /*
     * Display it
     */
    switch ( mode ) {
    case DTST_INACTIVE:
        printf( "Time slot 1 on board 1 is idle\n" );
        break;
    case DTST_BUSY:
        printf( "Time slot 1 on board 1 is busy\n" );
        break;
    }
    .
    .
}

}
```

ATDT_STATUS()*returns the current status***■ Errors**

If the function returns AT_FAILURE, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_INVMMSG** - invalid message
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_xmitwink()**

returns the current signaling mode **ATDT_TS MODE()**

Name: long ATDT_TS MODE(devh)
Inputs: int devh

- digital network interface logical time slot device handle

Returns: time slot signaling mode
AT_FAILURE if failure
Includes: srllib.h
dtlib.h
Category: Extended Attribute
Mode: synchronous

■ Description

The **ATDT_TS MODE()** function *returns the current signaling mode* of the time slot specified in **devh**.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()

The following defines are provided in *dtlib.h*.

- **DTM_SIGINS** - signaling insertion mode (digital network interface board generates signaling to network)

To determine the signaling mode of a specified time slot, compare the returned value with the defines listed above.

■ Cautions

1. This function will fail if an invalid digital network interface logical time slot device handle is specified.
2. For returned values to be valid, you must call **dt_setsigmod()** first.

■ Example

```
#include <windows.h>          /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>

main()
{
    int devh;                  /* Time slot device handle */
    long mode;                 /* Time slot signaling mode */

    /*
     * Open board 1 time slot 1 device
     */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Cannot open time slot dtiB1T1.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Get current time slot signaling mode
     */
    if ( ( mode = ATDT_TS MODE( devh ) ) == AT_FAILURE ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }

    /*
     * Display it
     */
    switch ( mode ) {
    case DIM_SIGINS:
        printf( "Time slot 1 on board 1 has signaling insertion\n" );
        break;
    case DIM TRANSP:
        printf( "Time slot 1 on board 1 has signaling transparent\n" );
        break;
    }
    .
    .
}

}
```

■ Errors

If the function returns AT_FAILURE, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_BDSGBT()**
- **ATDT_BDMODE()**
- **dt_setsigmod()**
- **dt_settssig()**

ATDT_TSSGBT()	<i>retrieves the current bit state</i>
-----------------------	--

Name:	long ATDT_TSSGBT(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interfacelogical time slot device handle
Returns:	state of time slot signaling bits AT_FAILURE if failure
Includes:	srlib.h dtlib.h
Category:	Extended Attribute
Mode:	synchronous

■ Description

The **ATDT_TSSGBT()** function *retrieves the current bit state* of the transmit and receive signaling bits for the time slot specified by **devh**.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()

The returned bitmask represents the following signaling bits:

- **DTSG_RCVA** - “A” receive signaling bit
- **DTSG_RCVB** - “B” receive signaling bit
- **DTSG_RCVC** - “C” receive signaling bit (E1 only)
- **DTSG_RCVD** - “D” receive signaling bit (E1 only)
- **DTSG_XMTA** - “A” transmit signaling bit
- **DTSG_XMTB** - “B” transmit signaling bit
- **DTSG_XMTC** - “C” transmit signaling bit (E1 only)
- **DTSG_XMTD** - “D” transmit signaling bit (E1 only)

To determine the state of the signaling bits for the specified time slot, perform a logical AND operation on the byte buffer and the defines, as demonstrated in the example below.

■ Cautions

1. This function will fail if an invalid digital network interface logical time slot device handle is specified.
2. The transmit signaling bits are only valid when the device is in signaling insertion mode.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>
main()
{
    int devh;                  /* Time slot device handle */
    long tsbits;               /* Time slot signaling bits */
    int arcv, brcv, axmt, bxmt; /* Bit mask values */
/*
 * Open board 1 time slot 1 device
 */
    if ( ( devh = dt_open( "dtiBit1", 0 ) ) == -1 ) {
        printf( "Cannot open time slot dtiBit1.  errno = %d", errno );
        exit( 1 );
    }
/*
 * Get time slot signaling bits
 */
    tsbits = ATDT_TSSGBIT( devh );
    if ( tsbits == AT_FAILURE ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }
/*
 * Display it
 */
    arcv = ( tsbits & DTSG_RCVA ) ? 1 : 0;
    brcv = ( tsbits & DTSG_RCVB ) ? 1 : 0;
    axmt = ( tsbits & DTSG_XMTA ) ? 1 : 0;
    bxmt = ( tsbits & DTSG_XMTB ) ? 1 : 0;
    printf( "tslot 1 arcv = %d, brcv = %d, axmt = %d, bxmt = %d\n",
            arcv, brcv, axmt, bxmt );
    .
}
}
```

■ Errors

If the function returns AT_FAILURE, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_RANGERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_BDSGBT()**
- **ATDT_BDMODE()**
- **ATDT_TS MODE()**
- **dt_setsigmod()**
- **dt_settssig()**

Name:	int dt_castdecode (msgp, decmsgbufp)
Inputs:	void *msgp void *decmsgbufp
	<ul style="list-style-type: none"> • pointer to encoded message block • pointer to destination buffer of decoded message block
Returns:	0 on success -1 on failure
Includes:	dtilib.h
Category:	CAS DTI Convenience
Mode:	synchronous

■ Description

The **dt_castdecode()** function is called internally by the DTI event retriever for each CAS DTI reply or event message block that occurs. Its purpose is to [decode the CAS DTI reply or event message block](#) before it is given to **dt_castmgmt()** or the application, respectively. This function is offered to localize the tasks of host system issues (i.e. byte swapping) and message formation with regards to messages that are passed across the host system bus.

The **dt_castdecode()** function takes as its first parameter a CAS DTI message block. It will use the **decmsgbufp** parameter to return the decoded message block. The operation of this function does not prevent **msgp** and **decmsgbufp** from being the same buffer.

■ Example

```
#include "dtilib.h"
...
/*
 * This is a code fragment demonstrating
 * the use of the _dt_castdecode() function.
 */
...

/*
 * Read CAS DTI message block from driver.
 */
...

/*
 * Decode the CAS DTI message block
 * before interrogating its contents.
 */
```

dt_castdecode()***decode the CAS DTI reply or event message block***

```
* Note: The CAS DTI message block should  
* not be manipulated until after this point.  
*/  
if ((n = _dt_castdecode(msgp, msgp)) == -1) {  
    ndt_set_lasterr(devh, EDT_INVMSG);  
    return -1;  
}  
...
```

■ Errors

This function returns -1 if it does not recognize the *msg_code* field the reply or event message block.

■ See Also

- ***dt_castencode()***

Name:	int <i>dt_castencode</i> (<i>msgp</i> , <i>encmsgbufp</i>)
Inputs:	void * <i>msgp</i> void * <i>encmsgbufp</i> <ul style="list-style-type: none"> • pointer to command message block to encode • pointer to destination buffer of encoded message block
Returns:	0 on success -1 on failure
Includes:	<i>dtilib.h</i>
Category:	CAS DTI Convenience
Mode:	synchronous

■ Description

The ***dt_castencode()*** function is called internally by ***dt_castmgmt()***. For every CAS DTI command message block passed to ***dt_castmgmt()***, the ***dt_castencode()*** function is called to validate and encode the message before it is written to the firmware. This function is offered to localize the tasks of host system issues (i.e. byte swapping) and message formation regarding messages that are passed across the host system bus.

The ***dt_castencode()*** function takes as its first parameter a command message block. It will use the ***encmsgbufp*** parameter to return the validated/encoded message block. Direct modification of the encoded message block is not allowed. The operation of this function does not prevent ***msgp*** and ***encmsgbufp*** from being the same buffer.

■ Example

```
#include "dtilib.h"
...
/*
 * This is a code fragment demonstrating
 * the use of the _dt_castencode() function.
 */
...

/*
 * Define a pulse using the pulse template message block.
 */
cpmsg.msg_code = DTCAS_CREATE_PULSE;
cpmsg.flags = 0;
cpmsg.template_id = 1;
cpmsg.OffPulseCode = (DTB_AON|DTB_BOFF);
cpmsg.OnPulseCode = (DTB_AOFF|DTB_BON);
```

```
cpmsg.PrePulseInterval      = 0;
cpmsg.PrePulseIntervalNom  = 0;
cpmsg.PulseIntervalMin     = 120;
cpmsg.PulseIntervalNom     = 150;
cpmsg.PulseIntervalMax     = 170;
cpmsg.PostPulseInterval    = 0;
cpmsg.PostPulseIntervalNom = 0;

/*
 * Encode the create pulse template message block
 * before sending to the driver.
 *
 * Note: The create pulse template message should
 * not be manipulated after this point unless it
 * is decoded.
 */
if ((n = _dt_castencode(&cpmsg, &cpmsg)) == -1) {
    ndt_set_lasterr(devh, EDT_BADCMDERR);
    return -1;
}

/*
 * Write to driver.
 */
...
```

■ Errors

This function returns -1 if it does not recognize the *msg_code* field in the command message block.

■ See Also

- ***dt_castdecode()***

manage the CAS DTI templates ***dt_castmgmt()***

Name:	int dt_castmgmt (devh, cmdmsgp, replymsgp)
Inputs:	int devh void *cmdmsgp void *replymsgp
	• valid DTI board or time slot device handle • pointer to command message block • pointer to reply message block buffer
Returns:	0 on success -1 on failure
Includes:	dtilib.h ditcas.h
Category:	I/O
Mode:	synchronous

■ Description

The **dt_castmgmt()** function is used to [manage the CAS DTI templates](#) used for the detection and transmission of signaling patterns with precise time intervals. Timing constraints in signaling protocols may make it very difficult to detect or transmit a signal at the application level and respond quickly. It is also difficult to ensure accurate timing between signal transitions, pulses, or trains. This function allows the application to predefine a signal set (a set of templates of signal transitions, pulses, and/or trains, and times to remain at each signal state) in the board's firmware, effectively offloading signal detection and transmission from the host. Signal templates, once created, apply to all channels on a board. Each signal template is enabled or disabled on a per channel basis. The signal detection and transmission characteristics are communicated to the board via the command message blocks described below.

Each template created for a signal set must have a distinct identifier. The creation and deletion of a template is initiated by a command from the application. The changing of the parameters of a template is done by deleting the old template and adding a new template. Once defined, each template has all channels disabled, and must be enabled or disabled individually for each channel for which it is intended. If a template is deleted by the application, all signal matching or transmission for that template on all channels is abandoned and the application will not be notified. If a template is disabled on a specific channel by the application, all signal matching or transmission for that template on that specific channel is abandoned and the application will not be notified.

For signal detection, once a template is enabled on a channel, all incoming signaling changes are matched against the template on that channel. If more than one template is enabled on a channel, incoming signaling changes are matched against all templates on that channel. As soon as all the parameters on a template(s) are matched, an unsolicited event (DTEV_CASTEVT) is sent to the application. The event data contains the identifier of the template that was detected. The firmware will send the event each time a transition, pulse, or train of pulses is received and validated.

For signal transmission, once a template is defined and enabled, an application can transmit signals matching that template using a subcommand DTCAS_TRANSMIT_TEMPLATE. The board immediately acknowledges the send command with DTCAS_TRANSMIT_TEMPLATE_COMPLETE. The application receives an unsolicited event (DTEV_CASSENDENDEVT) after send command succeeds.

Signal detection or transmission is terminated when any of the following conditions are satisfied:

- The template is disabled or deleted.
- A change in the detected signal is detected.

This function operates in the synchronous (blocking) mode; however, signal detection or transmission, once enabled, occurs asynchronously. All data structures used for creating a template, deleting a template, enabling a template, disabling a template, detecting a signal, and transmitting a signal are defined in *dticas.h*.

Parameter	Description
devh	Specifies the valid board or time slot device handle returned by the call to dt_open() . The type of handle depends on the cmdmsgp argument.
cmdmsgp	Points to the command message block. Descriptions of valid command message blocks are listed in <i>Appendix B - Message Blocks</i> . Although the number of fields and their meaning are different for each command message block, they all contain one or more of the data types described in the Common Data Types table below.

Parameter	Description
replymsgp	Points to the reply message block buffer supplied by the application. If the function returns 0, this buffer is filled with the reply message block. Descriptions of the reply message block expected by each command are listed in <i>Appendix B - Message Blocks</i> . Although the number of fields and their meaning are different for each reply message block, they all contain one or more of the data types described in the Common Data Types table below.

WARNING

The application is responsible for allocating a reply message block buffer of sufficient length.

If event handling is set up properly for your application, the **sr_getevtype()** function included in the SRL will return **DTEV_CASTEVT** when a signal pattern match occurs, and **DTEV_CASSENDENDEVT** when signal transmission is complete. The **DTEV_CASTEVT** and **DTEV_CASSENDENDEVT** event blocks are described in *Appendix B - Message Blocks*.

Although each message block is different, they all contain one or more of the following data types; however, there are three fields that are common to each parameter as follows:

Table 4. Common Data Types

template_id	A template identifier that is a 2-byte quantity with no implicit value or order. It is used to identify the template in recognition events and to select the template in transmission commands. The application is free to use it for any unique identifier. However, it is recommended that the following convention be used: The 2-byte template IDs should consist of the high byte being a protocol number and the low byte being the template “meaning” (1=idle, 2=ring, 3=seize, etc.).
--------------------	---

prefixCode The signal pattern for matching and setting templates. This is a bit pattern that represents the signaling bits, and is used as a building block to specify templates. This parameter is similar to the **dt_settssigsim()** bitmask. The *prefixCode* can be 0 or a logical OR of one or more of the following values:

- **DTB_AON** - “A” signaling bit on
- **DTB_AOFF** - “A” signaling bit off
- **DTB_BON** - “B” signaling bit on
- **DTB_BOFF** - “B” signaling bit off
- **DTB_CON** - “C” signaling bit on (E1 only)
- **DTB_COFF** - “C” signaling bit off (E1 only)
- **DTB_DON** - “D” signaling bit on (E1 only)
- **DTB_DOFF** - “D” signaling bit off (E1 only)

NOTE: It is incorrect to OR ON and OFF states for the same signaling bit, i.e., it is incorrect to OR DTB_AON and DTB_AOFF. The ON state will be the one matched.

prefixInterval The time interval. Time intervals are specified in units of 1 ms; however, due to the internal clock mechanism, this value may vary ±5 ms. The maximum value that can be specified is 63 seconds.

■ Cautions

1. The **dt_settssigsim()** function must be used to set the state of the channel's signaling bits prior to sending any CAS templates via a call to **dt_castmgmt()**. The user must set the channel's signaling bits to the state specified in the **PreTransCode** parameter value prior to sending a transition or to the **OffPulseCode** parameter value when sending a pulse or train. The user must also ensure that the pattern is transmitted for the amount of time specified by the **PreTransInterval**, **PrePulseInterval**, or **PreTrainInterval** parameter of the DTCAS_CREATE_TRANSITION, DTCAS_CREATE_PULSE, or DTCAS_CREATE_TRAIN command message blocks, respectively.
2. This function will fail under the following conditions:
 - An invalid device handle is specified.

- Signaling insertion is not enabled; the time slot must be in signaling insertion mode before this function is called. Signaling insertion mode is enabled using the **dt_setsigmod()** function.
- An application initiates a transmit command before the completion of a progressing transmission.

■ Example

```
// This program uses a D/480 or D/600 to demonstrate how CAS templates work.

#include "stdafx.h"
#include <stdio.h>
#include <errno.h>
#include "srllib.h"
#include "dtlib.h"

#include <windows.h>
#include <winbase.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdlib.h>
#include <string.h>
#include <conio.h>

#define USEREVT_KEYBOARD 1 /*User defined keyboard event */

int Kbhit_flag = 0;
void CheckKey( void *dummy );
int process(int,long);

int main(int argc, char* argv[])
{

    int srlmode,x;
    int devh, devh2; /* DTI board device descriptor */
    int tsdevh, tsdevh2; /* DTI channel device descriptor */
    DTCAS_CREATE_TRAIN_MSG cpmsg; /* Create train template message */
    DTCAS_REPLY_MSG cpcmsg; /* Reply buffer for Train template complete message */
    DTCAS_ENA_DIS_TEMPLATE_MSG etmsg; /* Enable template message */
    DTCAS_REPLY_MSG etcmsg; /* Reply buffer for enable template complete message */
    DTCAS_TRANSMIT_MSG tmsg; /*Transmit train template message*/
    DTCAS_REPLY_MSG tcmsg; /* Reply buffer for Train template transmit
                           complete message */
    DTCAS_DELETE_TEMPLATE_MSG dmsg; /*Delete train template message*/
    DTCAS_REPLY_MSG dcmsg; /* Reply buffer for delete train template
                           complete message */

    int evtdev;
    long evtype;

    /* Launch CheckKey thread to check for terminating keystroke. */
    _beginthread( CheckKey, 0, NULL );

    /*
```

dt_castmgmt()***manage the CAS DTI templates***

```

/*
 * Set SRL to run in polled mode.
 */
srlmode = SR_POLLMODE;
if (sr_setparm(SRL_DEVICE,SR_MODEID,&srlmode) == -1)
{
    fprintf(stderr,"ERROR: Failed to set SRL in SR_POLLMODE\n");
    exit(1);
}

/*
 * Open DTI board devices.
 */
if ((devh = dt_open("dtiB1",0)) == -1)
{
    fprintf(stderr,"Cannot open dtiB1: error=%d", errno);
    exit(1);
}
if ((devh2 = dt_open("dtiB2",0)) == -1)
{
    fprintf(stderr,"Cannot open dtiB2: error=%d", errno);
    dt_close(devh);
    exit(1);
}

/*
 * Open DTI board 1, tslot 1.
 */
if ((tsdevh = dt_open("dtiB1T1",0)) == -1)
{
    fprintf(stderr,"Cannot open dtiB1T1: error=%d", errno);
    dt_close(devh);
    dt_close(devh2);
    exit(1);
}

/*
 * Open DTI board 2, tslot 1.
 */
if ((tsdevh2 = dt_open("dtiB2T1",0)) == -1)
{
    fprintf(stderr,"Cannot open dtiB2T1: error=%d", errno);
    dt_close(devh);
    dt_close(devh2);
    dt_close(tsdevh);
    exit(1);
}

/*
 * Set signaling mode to signaling insertion
 */
if (dt_setsigmod(tsdevh, DTM_SIGINS) == -1)
{
    fprintf(stderr,"dt_setsigmod ERROR %d: %s\n",
        ATDV_LASTERR(tsdevh),ATDV_ERRMSGP(tsdevh));
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}
if (dt_setsigmod(tsdevh2, DTM_SIGINS) == -1)

```

manage the CAS DTI templates***dt_castmgmt()***

```

{
    fprintf(stderr,"dt_setsigmod ERROR %d: %s\n",
    ATDV_LASTERR(tsdevh),ATDV_ERRMSGP(tsdevh2));
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}

/*
 * Define a Train using the Train template message block.
 */
cpmsg.msg_code = DTCAS_CREATE_TRAIN;
cpmsg.rfu = 0;
cpmsg.template_id = 1;
cpmsg.OffPulseCode = (DTB_AON|DTB_BOFF);
cpmsg.OnPulseCode = (DTB_AOFF|DTB_BON);
cpmsg.PreTrainInterval = 1200;
cpmsg.PreTrainIntervalNom = 1300;

cpmsg.PulseIntervalMin = 1200;
cpmsg.PulseIntervalNom = 1500;
cpmsg.PulseIntervalMax = 1700;

cpmsg.InterPulseIntervalMin = 1000;
cpmsg.InterPulseIntervalNom = 1200;
cpmsg.InterPulseIntervalMax = 1400;

cpmsg.PostTrainInterval = 1500;
cpmsg.PostTrainIntervalNom = 1700;

// Set up the signalling bits per the template -
if ( dt_settssigsim( tsdevh, DTB_AON | DTB_BOFF ) == -1)
{
    printf("dt_settssigsim failed - Error message = %s.", ATDV_ERRMSGP( devh ) );
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}
else
    printf("Set Bits on dtiB2T1\n");

//Hold the pattern for at least 1200 ms
Sleep(1200);

//Add train template to signal set.
//
if (( x=dt_castmgmt(devh, &cpmsg, &cpcmsg) ) == -1)
{
    fprintf(stderr,"Error Message (Add train template to signal set) on
                    board 1= %x, %s\n",ATDV_LASTERR(devh),ATDV_ERRMSGP(devh));
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
}

```

```

        exit(1);
    }
    else
        printf(" dt_castmgmt result = %x\n",x);
    //
    //Check if operation was successful.
    //
    printf("on board 1: msg_code = %d, rfu = %d , template_id = %d, result = 0x%x\n",
           cpcmsg.msg_code, cpcmsg.rfu, cpcmsg.template_id, cpcmsg.result);
    if (cpcmsg.result != 0)
    {
        fprintf(stderr,"Add train template to signal set failed. \n");
        dt_close(tsdevh);
        dt_close(devh);
        dt_close(tsdevh2);
        dt_close(devh2);
        exit(1);
    }

    if (dt_castmgmt(devh2, &cpcmsg, &cpcmsg) == -1)
    {
        fprintf(stderr,"Error Message (Add train template to signal set) on
                           board 2 = %s",ATDV_ERRMSGP(devh2));
        dt_close(tsdevh);
        dt_close(devh);
        dt_close(tsdevh2);
        dt_close(devh2);
        exit(1);
    }

    //
    // Check if operation was successful.
    //
    printf("on board 2: msg_code = %d, rfu = %d , tempate_id = %d, result = %x\n",
           cpcmsg.msg_code, cpcmsg.rfu, cpcmsg.template_id, cpcmsg.result);
    if (cpcmsg.result != 0)
    {
        fprintf(stderr,"      Add train template to signal set failed. ");
        dt_close(tsdevh);
        dt_close(devh);
        dt_close(tsdevh2);
        dt_close(devh2);
        exit(1);
    }
    /*
     * Enable template id 1.
     */
    etmsg.msg_code = DTCAS_ENABLE_TEMPLATE;
    etmsg.rfu = 0;
    etmsg.template_id = 1;

    /*
     * Enable template.
     */
    if (dt_castmgmt(tsdevh, &etmsg, &etcmsg) == -1)
    {
        printf("Error Message (Enable template) on
                           board 1 = %s",ATDV_ERRMSGP(tsdevh));
        dt_close(tsdevh);
        dt_close(devh);
        dt_close(tsdevh2);
        dt_close(devh2);
        exit(1);
    }
}

```

```

}
/*
 * Check if the operation was successful.
 */
printf("on board 1: msg_code = %d, rfu = %d , tempate_id = %d, result = %x\n",
       etcmsg.msg_code, etcmsg.rfu, etcmsg.template_id, etcmsg.result);
if (etcmsg.result != 0)
{
    fprintf(stderr,"      Enable template failed.\n" );
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}

if (dt_castmgmt(tsdevh2, &tmsg, &etcmsg) == -1)
{
    printf("Error Message (Enable template) on
           board 2 = %s",ATDV_ERRMSGP(tsdevh2));
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}

/*
 * Check if the operation was successful.
 */
printf("on board 2: msg_code = %d, rfu = %d , tempate_id = %d, result = %x\n",
       etcmsg.msg_code, etcmsg.rfu, etcmsg.template_id, etcmsg.result);
if (etcmsg.result != 0)
{
    fprintf(stderr,"Enable template failed. Error = %s",ATDV_ERRMSGP(tsdevh2));
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}

/*
 * Send Signal for Template ID 1.
 */
tmsg.msg_code = DTCAS_TRANSMIT_TEMPLATE;
tmsg.rfu = 0;
tmsg.template_id = 1;
tmsg.pulse_count = 2;

/*
 * Send template.
 */
if (dt_castmgmt(tsdevh, &tmsg, &etcmsg) == -1)
{
    printf("Error Message (Send template) On Board 1 = %s",ATDV_ERRMSGP(tsdevh));
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}

```

```

/*
 * Check if the operation was successful.
 */
printf("on board 1: msg_code = %d, rfu = %d , template_id = %d, result = %x\n",
       tcmsg.msg_code, tcmsg.rfu, tcmsg.template_id, tcmsg.result);
if (tcmsg.result != 0)
{
    fprintf(stderr,"      Send template failed.\n");
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}

/*While no keyboard input, keep cycling through functions */
while (1)
{
    /*Wait for events */
    sr_waitevt(-1);
    evtdev = sr_getevtdev();
    evttypes = sr_getevttypes();
    if ((evtdev == SRL_DEVICE) && (evttypes == USEREVT_KEYBOARD))
        break;
    if (process(evtdev, evttypes) != 0)
        break;
}

// delete template and close ts and board
dmsg.msg_code = DTCAS_DELETE_TEMPLATE;
dmsg.rfu = 0;
dmsg.template_id = 1;//DTCAS_CLEAR_ALL_TEMPLATE

if (dt_castmgmt(tsdevh, &dmsg, &dcmsg) == -1)
{
    printf("Error Message (deleting template) on
           board 1= %s",ATDV_ERRMSGP(tsdevh));
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}
/*
 * Check if the operation was successful.
 */
printf("on board 1: msg_code = %d, rfu = %d , template_id = %d, result = 0x%x\n",
       dcmsg.msg_code, dcmsg.rfu, dcmsg.template_id, dcmsg.result);
if (dcmsg.result != 0)
{
    fprintf(stderr,"      Deleting template failed. \n");
    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    exit(1);
}
if (dt_castmgmt(tsdevh2, &dmsg, &dcmsg) == -1)
{
    printf("Error Message (deleting template) on
           board 2= %s",ATDV_ERRMSGP(tsdevh2));
    dt_close(tsdevh);
    dt_close(devh);
}

```

manage the CAS DTI templates**dt_castmgmt()**

```
        dt_close(tsdevh2);
        dt_close(devh2);
        exit(1);
    }
    /*
     * Check if the operation was successful.
     */
    printf("on board 2: msg_code = %d, rfu = %d , template_id = %d, result = 0x%x\n",
           dcmsg.msg_code, dcmsg.rfu, dcmsg.template_id, dcmsg.result);
    if (dcmsg.result != 0)
    {
        fprintf(stderr, "      Deleting template failed. \n");
        dt_close(tsdevh);
        dt_close(devh);
        dt_close(tsdevh2);
        dt_close(devh2);
        exit(1);
    }

    dt_close(tsdevh);
    dt_close(devh);
    dt_close(tsdevh2);
    dt_close(devh2);
    return 0;
}

*****
* NAME: int process( eventdev, event )
* DESCRIPTION: Do the next function depending on the Event Received
* INPUT: int eventdev; - Device on which event was received
* int event; - Event being processed
* OUTPUT: None
* RETURNS: New Channel State
* CAUTIONS: None
*****
int process( int tsdev, long event )
{
    int len = sr_getevtlen();
    DTCAS_DETECTED_MSG *dmsgp1;
    DTCAS_END_TRANSMIT_MSG *dmsgp2;

    switch ( event )
    {
        case DTEV_CASTEVT:
            printf("%s: Signaling completed ", ATDV_NAMEP(tsdev));
            dmsgp1 = (DTCAS_DETECTED_MSG *)sr_getevtdata();
            printf("DTEV CASTEVT detected Template %d\t message code = %d\tResult
Code = %d\n", dmsgp1->template_id, dmsgp1->msg_code, dmsgp1->result);
            break;
        case DTEV_CASSENDENDEVT:
            printf("%s: Signal Transmission completed ", ATDV_NAMEP(tsdev));
            dmsgp2 = (DTCAS_END_TRANSMIT_MSG *)sr_getevtdata();
            printf("DTEV_CASSENDENDEVT detected Template %d\n", dmsgp2->template_id);
            break;
        default:
            fprintf(stderr,"%s: EVENT ERROR: Unknown event = 0x%lx\t Data Length =
%d\n", ATDV_NAMEP(tsdev), sr_getevttype(), len);
            break;
    }
    return 0;
}
```

```
*****
* NAME: DWORD WINAPI keyboard_monitor( LPVOID argp )
* DESCRIPTION: Wait for keyboard input
* INPUT: LPVOID argp
* OUTPUT: None
* RETURNS: none
* CAUTIONS: None
*****
void CheckKey( void *dummy )
{
    int ch;
    printf("Press 'q' to quit\n");
    do
    {
        ch= _getch();
        if (ch=='q')
        {
            sr_putevt(SRL_DEVICE,USEREVT_KEYBOARD,0,NULL,0);
        }
        else
            printf("\n");
    }while (ch!='q');

/* _endthread given to terminate */
_endthread();
}
```

■ Errors

If this function returns -1 to indicate failure, use **ATDV_LASTERR()** and **ATDV_ERRMSGP()** to retrieve one of the following error types.

- **EDT_BADBRDERR** - DTI/2xx missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_PARMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware
- **EDT_INVTS** - invalid time slot device handle
- **EDT_SIGINS** - signaling insertion not enabled
- **EDT_INVMMSG** - invalid message

Name:	int dt_close(devh)
Inputs:	int devh
	• digital network interface logical board or digital network interface logical time slot device handle
Returns:	0 on success -1 on failure
Includes:	srlib.h dtlib.h
Category:	Resource Management
Mode:	synchronous

■ Description

The **dt_close()** function [closes digital network interface devices](#) opened previously by a call to **dt_open()**. The specified device may be either a digital network interface logical board or time slot device. The **dt_close()** function releases the handle and breaks the link between the calling process and the device.

Parameter	Description
devh	Specifies the valid digital network interface logical board or digital network interface logical time slot device handle returned by a call to dt_open()

■ Cautions

1. This function will fail if the device handle is invalid.
2. The **dt_close()** function affects only the link between the calling process and the device. Other processes are unaffected by **dt_close()**.
3. If event notification is active for the device to be closed, call the SRL **sr_dishdlr()** function prior to calling **dt_close()**.
4. A call to **dt_close()** does not affect the configuration of the device.
5. Devices should **never** be closed using the **close()** function.

■ Example

```
#include <windows.h> /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>

main()
{
    int devh;           /* Board device handle */

    /*
     * Open board 1 device
     */
    if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiB1.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Continue processing
     */
    .

    .

    /*
     * Done processing - close device.
     */
    if ( dt_close( devh ) == -1 ) {
        printf( "Cannot close board dtiB1.  errno = %d", errno );
    }
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the following error value:

- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error

■ See Also

- **dt_open()**

allows the application to pulse dial

dt_dial()

Name:	int dt_dial(devh,digstr,tmo)
Inputs:	int devh char *digstr unsigned int tmo
Returns:	0 on success -1 on failure
Includes:	srlib.h dtilib.h
Category:	Time Slot Signaling
Mode:	synchronous/asynchronous

■ Description

The **dt_dial()** function [allows the application to pulse dial](#) an ASCIIZ string of digits on a specified Dialogic® D/240SC-T1, D/240SC-2T1, D/480SC-2T1, D/300SC-E1, D/300SC-2E1, or D/600SC-2E1 Board time slot. The function can operate in either the synchronous (blocking) or asynchronous (non-blocking) mode.

Parameter	Description
devh	Specifies the valid time slot device handle returned by a call to dt_open() . The specified time slot must be in the off-hook, idle state when dt_dial() is called.
digstr	Pointer to the ASCIIZ string of digits to dial. The maximum length of the string is 32 digits.
tmo	Specifies the maximum number of seconds that the function will block while waiting for a dial status response from the Dialogic® D/xxxSC Board.

Asynchronous Mode

To operate this function in asynchronous (non-blocking) mode, specify 0 for **tmo**. This allows the application to continue processing while waiting for a completion event. If event handling is set up properly for your application, DTEV_PDDONE will be returned by the **sr_getevttpe()** function included in the SRL when the dial is successfully completed. See *Appendix A – Dialogic® Standard Runtime Library* for information on event handling.

Synchronous Mode

To operate the function in synchronous (blocking) mode, specify a length of time in seconds that the function will block for **tmo**. This causes the application to wait for a return from the function before performing any other processing. A suggested **tmo** setting for this function is 60.

■ Cautions

1. This function will fail under the following conditions:
 - A logical board or invalid time slot device handle is specified.
 - More than a 32 digit buffer is passed.
 - There is insufficient memory.
 - Signaling insertion is not enabled.
 - The time slot is already pulse dialing.
 - The time slot is not in the off-hook idle state.
2. The time slot must be in signaling insertion mode before this function is called. Signaling insertion mode is enabled using the **dt_setsigmod()** function.
3. To use this function in asynchronous mode, you must use the **dt_setevtmsk()** and SRL **sr_enbhdlr()** functions to enable trapping the completion event and create an event handler to process the event. See *Appendix A – Dialogic® Standard Runtime Library* for more information on digital network interface event management.
4. Make sure adequate time is given to the function to complete the dial if the synchronous mode is used.

■ Example 1

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>
/*
 * Basic error handler
 */
do_error( devh, funcname )
    int devh;
    char *funcname;
{
    int errorval = ATDV_LASTERR( devh );
    printf( "Error while calling function %s.\n", funcname );
    printf( "Error value = %d. Error message = %s.", errorval,
            ATDV_ERRMSGP( devh ) );
    if ( errorval == EDT_SYSTEM ) {
        printf( "errno = %d.\n", errno );
    } else {
        printf( "\n" );
    }
}
main()
{
    int tsdev;           /* Time Slot device handle */
    /*
     * Open time slot 1 on board 1
     */
    if ( ( tsdev = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Failed to open device dtiB1T1.  errno = %d\n", errno );
        exit( 1 );
    }
    /*
     * Set signaling mode to signaling insertion
     */
    if ( dt_setsigmod( tsdev, DTM_SIGINS ) == -1 ) {
        do_error( tsdev, "dt_setsigmod()" );
        exit( 1 );
    }
    /*
     * Disable silence transmission
     */
    if ( dt_setidle( tsdev, DTIS_DISABLE ) == -1 ) {
        do_error( tsdev, "dt_setidle()" );
        exit( 1 );
    }
    /*
     * Go offhook
     */
    if ( dt_settssig( tsdev, DTB_ABIT | DTB_BBIT, DTA_SETMSK ) == -1 ) {
        do_error( tsdev, "dt_settssig()" );
        exit( 1 );
    }
    /*
     * Dial number with 60 second timeout. Note that this is the blocking
     * mode dial.
     */
    if ( dt_dial( tsdev, "7223689", 60 ) == -1 ) {
        do_error( tsdev, "dt_dial()" );
        exit( 1 );
    }
}
```

dt_dial()

allows the application to pulse dial

```
    }
    /*
     * Continue processing
     *
     * .
     */
    /*
     * Done processing - close device.
     */
    if ( dt_close( tsdev ) == -1 ) {
        do_error( tsdev, "dt_close()" );
    }
}
```

■ Example 2 – Setting Flash Hook Using *dt_dial()*

```
/*
 * Set flash hook
 */

setflashhook(tsdev)
{
    char dial_str[10];
    int value;
    sprintf(dial_str, "%c", DTV_FLASHCHR);
    tmo = 10;
    dt_dial(tsdev, string, tmo);

    /*
     * Change flash time
     */
    value = 100;      /* 1 sec */
    .
    .
    .
    dt_setparm(tsdev, DTG_PDDLFTIM, (void *)&value);
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by ATDV_LASTERR are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware
- **EDT_INVTS** - invalid time slot device handle
- **EDT_SIGINS** - signaling insertion not enabled
- **EDT_TSBSY** - time slot is busy
- **EDT_PDOFFHK** - not in off-hook idle state
- **EDT_PDSIG** - cannot disable insertion when pulse dialing

Error defines can be found in the file *dtilib.h*.

■ See Also

In the *Dialogic® Voice API Library Reference*:

- **dx_dial()**

dt_getctinfo() *returns information about the digital network interface*

Name:	int dt_getctinfo(devh,ct_devinfos)
Inputs:	int devh CT_DEVINFO *ct_devinfos
	• digital network interface device time slot handle • pointer to device information structure
Returns:	0 on success -1 on failure
Includes:	srlib.h dtlib.h ctinfo.h
Category:	SCbus Routing
Mode:	synchronous

■ Description

The **dt_getctinfo()** function *returns information about the digital network interface* device associated with the specified digital channel (time slot) (dtiBxTx) on a DTI or voice and network board.

Parameter	Description
devh	Specifies the valid digital network interface time slot device handle returned by a call to dt_open()
ct_devinfos	Specifies the pointer to the data structure CT_DEVINFO

On return from the function, the CT_DEVINFO structure contains the relevant information and is declared as follows:

```
typedef struct {
    unsigned long    ct_prodid;      /* product ID */
    unsigned char    ct_devfamily;   /* device family */
    unsigned char    ct_devmode;     /* device mode */
    unsigned char    ct_nettype;    /* network interface */
    unsigned char    ct_busmode;    /* bus architecture */
    unsigned char    ct_busencoding; /* bus encoding */
    union {
        unsigned char ct_RFU[7];    /* reserved */
        struct {
            unsigned char ct_prototype;
        } ct_net_devinfos;
    } ct_ext_devinfos;
} CT_DEVINFO;
```

Valid values for each member of the CT_DEVINFO structure are defined in *ctinfo.h*. Possible return values are:

ct_prodid: field contains a valid product identification number for the device.

ct_devfamily: specifies the device family and contains:

- CT_DFSPAN - specifies a T1 or E1 digital interface device

ct_devmode: not valid for T1 or E1 devices

ct_netttype: specifies the type of network interface for the device. The valid values are:

- CT_NTT1 - specifies a T1 digital channel
- CT_NTE1 - specifies an E1 digital channel

ct_busmode: specifies the bus architecture used to communicate with other devices in the system. The valid values are:

- CT_BMSCBUS - specifies SCbus architecture
- CT_BMH100 - specifies H.100 or CT Bus architecture

ct_ext_devinfo.ct_net_devinfo.ct_protttype: contains information about the protocol used on the specified digital network interface device. The following values are currently supported:

- CT_ISDN
- CT_CAS
- CT_R2MF
- CT_CLEAR

NOTE: The **ct_ext_devinfo.ct_net_devinfo.ct_protttype** field is not supported on Dialogic® Springware JCT Boards.

■ Cautions

This function will fail if an invalid time slot device handle is specified.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main( )
{
    int devh;                  /* Digital network interface device handle */
    CT_DEVINFO ct_devinfo;     /* Device information structure */

    /* Open board 1 time slot 1 on Digital network interface device */
    if ((devh = dt_open("dtiB1T1", 0)) == -1) {
        printf("Cannot open time slot dtiB1T1.  errno = %d", errno);
        exit(1);
    }

    /* Get Device Information */
    if (dt_getctinfo(devh, &ct_devinfo) == -1) {
        printf("Error message = %s", ATDV_ERMSGP(devh));
        exit(1);
    }

    printf("%s Product Id = 0x%lx, Family = %d, Network = %d, Bus mode = %d,
Encoding = %d", ATDV_NAMEP(devh), ct_devinfo.ct_prodid,
ct_devinfo.ct_devfamily, ct_devinfo.ct_netttype, ct_devinfo.ct_busmode,
ct_devinfo.ct_busencoding);
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - board missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid time slot device handle
- **EDT_INVMMSG** - invalid message
- **EDT_SH_BADLCLTS** - invalid local time slot number
- **EDT_SH_BADINDEX** - invalid switch handler library index number
- **EDT_SH_BADTYPE** - invalid local time slot type
- **EDT_SH_LIBBSY** - switch handler library busy
- **EDT_SH_LIBNOTINIT** - switch handler library is uninitialized
- **EDT_SH_MISSING** - switch handler is not present
- **EDT_SH_NOCLK** - switch handler clock fallback failed
- **EDT_SYSTEM** - system error
- **EDT_TMOERR** - timed out waiting for reply from firmware

■ See Also

In the *Dialogic® Voice API Library Reference*:

- **ag_getctinfo()**
- **dx_getctinfo()**

dt_getevt()***blocks and returns control to the program***

Name:	int dt_getevt(devh,eblkp,timeout) (Windows® only)
Inputs:	int devh • Dialogic® D/240SC-T1 or D/300SC-E1 Board digital network interface device time slot handle EV_EBLK *eblkp int timeout • pointer to event block structure • timeout value in seconds
Returns:	0 on success -1 on failure
Includes:	srlib.h dtilib.h
Category:	Parameter Request
Mode:	Synchronous

■ Description

The **dt_getevt()** function **blocks and returns control to the program** after one of the events set by **dt_setevtmsk()** occurs on the channel specified in the **devh** parameter, or a timeout occurs. The **dt_getevt()** function is used with multi-threaded applications only.

Parameter	Description
devh	Specifies the valid digital network interface time slot device handle returned by a call to dt_open()
*eblkp	Points to the event block structure DX_EBLK, which will contain the event that ended the blocking
timeout	Specifies the maximum amount of time in seconds to wait for an event to occur. The timeout parameter can have one of the following values: <ul style="list-style-type: none"> • # of seconds: maximum length of time to wait for an event. When the time has elapsed, the function will terminate and return an error. • -1: block until an event occurs - the function will not time out • 0: returns -1 immediately if no event is present

NOTE: When the time specified expires, **dt_getevt()** will terminate and return an error. The Standard Attribute function **ATDV_LASTERR()** can be used to determine the cause of the error, which in this case is **EDX_TIMEOUT**.

On successful return from the function, the event block structure will have the following information.

eblk.ev_dev	Device on which the event occurred - this will be the same as the devh parameter passed in.
eblk.ev_event	DTEV_SIG indicates signaling transition event. DTEV_T1ERRC indicates alarm.
eblk.ev_data[]	DTEV_SIG contains information about the signaling event. ev_data[] is an array of bytes where ev_data[0] and ev_data[1] contain the signaling information. Retrieve the signaling information in a short variable. See the example below to get the signaling information from ev_data[0] and ev_data[1] . DTEV_T1ERRC contains information about the type of alarm occurring.

The event block structure is defined as follows:

```
typedef struct ev_eblk {  
    long ev_dev;          /* Device on which event occurred */  
    unsigned long ev_event; /* Event type */  
    long ev_len;           /* Length of data associated with event */  
    char ev_data[8];       /* 8 byte data buffer */  
    void * ev_datap;      /* Variable pointer if more than 8 bytes of  
                           data */  
} EV_EBLK;
```

■ Cautions

dt_getevt() is only used for multithreaded applications.

■ Example

```
#include <windows.h>
#include <srllib.h>
#include <dtplib.h>
#include <errno.h>

EV_EBLK eblk;
main()
{
    int devh;           /* Board device handle */
    unsigned short bitmaskp; /* Bitmask variable */
    unsigned short sigmsk = DTMM_AON | DTMM_AOFF | DTMM_BON | DTMM_BOFF;
    short sig, indx;

    /*
     * Open Timeslot 1 device
     */
    if ( ( devh = dt_open( "dtiBlT1", 0 ) ) == -1 ) {
        printf( "Cannot open timeslot dtiBlT1. errno = %d", errno );
        exit( 1 );
    }
    if ( dt_setevtmsk(ddd, DTG_SIGEV, sigmsk, DTA_SETMSK) == -1 ) {
        printf("%s: dt_setevtmsk DTG_SIGEV DTA_SETMSK ERROR %d: %s: Mask =\n"
               "0x%xx\n",ATDV_NAMEP(ddd),ATDV_LASTERR(ddd),ATDV_ERRMSGP(ddd),sigmsk);
        dt_close(ddd);
        exit(1);
    }
    /*
     * Wait for events on this timeslot
     */
    while(1) {
        dt_getevt( devh, &eblk, -1 ); /* Wait for ever */
        sig = eblk.ev_data[0] | ( (short) eblk.ev_data[1] << 8 );

        for (indx = 0; indx <4; indx++) {
            if (!(sig & (0x1010 << indx))) {
                continue;
            }
            switch (sig & (0x1111 << indx)) {
                case DTMM_AOFF:
                    fprintf(stderr,"A-OFF ");
                    break;
                case DTMM_AON:
                    fprintf(stderr,"A-ON ");
                    break;
                case DTMM_BOFF:
                    fprintf(stderr,"B-OFF ");
                    break;
                case DTMM_BON:
                    fprintf(stderr,"B-ON ");
                    break;
            } /* End of switch Statement */
        } /* end of for statement */
    } /* end of while statement */

    .
}

}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSG()** to obtain a descriptive error message. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADPARM** – invalid parameter
- **EDT_SYSTEM** - Windows® system error
- **EDT_TMOERR** - timed out waiting for reply from firmware

■ See Also

- **dt_getevtmsk()**

dt_getevtmsk()*retrieves the current event bitmask(s)*

Name:	int dt_getevtmsk(devh,event,bitmaskp)
Inputs:	int devh • digital network interface logical board or digital network interface logical time slot device handle
	int event • event to retrieve
	unsigned short *bitmaskp • pointer to bitmask variable
Returns:	0 on success -1 on failure
Includes:	srlib.h dtlib.h
Category:	Parameter Request
Mode:	synchronous

■ Description

The **dt_getevtmsk()** function retrieves the current event bitmask(s) for the specified event type and digital network interface logical board or time slot device. The function can be used to find which bitmask was set by the **dt_setevtmsk()** function.

Parameter	Description
devh	Specifies the valid digital network interface logical board or digital network interface logical time slot device handle returned by a call to dt_open()
event	Specifies which event's bitmask will be retrieved. The possible values for event are: <ul style="list-style-type: none"> • DTG_T1ERREVT - get T1 error bitmask (board level event) • DTG_E1ERREVT - get E1 error bitmask (board level event) • DTG_SIGEV - get signaling bitmask (time slot event) • DTG_PDIGEV - determine if pulse digit detection is enabled or disabled for the selected time slot device See <i>Table 5</i> for the mask values returned.
bitmaskp	Points to the variable that will contain the value of the bitmask

retrieves the current event bitmask(s)

dt_getevtmsk()

Table 5. dt_getevtmsk() Return Values

Event	Return	Description
DTG_T1ERREVT	DTEC_LOS DTEC_DPM DTEC_RED DTEC_BPVS DTEC_ECS DTEC_RYEL DTEC_RCLX DTEC_FERR DTEC_B8ZSD DTEC_RBL DTEC_RLOS DTEC_OOF	loss of T1 digital signal mask driver performance monitor mask receive red alarm mask bipolar violation count saturation mask error count saturation mask receive yellow alarm mask receive carrier loss mask frame bit error mask bipolar 8 zero substitution detect mask receive blue alarm mask receive loss of sync mask out of frame error mask
DTG_E1ERREVT	DEEC_RLOS DEEC_RUA1 DEEC_FSER DEEC_RRA DEEC_BPVS DEEC_CECS	receive loss of sync mask receive unframed all ones alarm mask frame sync error mask receive remote alarm mask bipolar violation count saturation mask CRC error count saturation mask
	DEEC_ECS DEEC_LOS	error count saturation mask loss of E1 digital signal detected mask
	DEEC_DPM DEEC_MFSERR	driver performance monitor mask multiframe sync error mask
	DEEC_RSA1 DEEC_RDMA	receive signaling all ones alarm mask receive distant multiframe alarm mask

dt_getevtmsk()*retrieves the current event bitmask(s)*

Event	Return	Description
(E1 only)	DTMM_AON	signaling bit “A” ON event mask
	DTMM_AOFF	signaling bit “A” OFF event mask
	DTMM_BON	signaling bit “B” ON event mask
	DTMM_BOFF	signaling bit “B” OFF event mask
	DTMM_WINK	receive wink signaling event mask
	DTMM_CON	signaling bit “C” ON event mask
	DTMM_COFF	signaling bit “C” OFF event mask
	DTMM_DON	signaling bit “D” ON event mask
DTG_PDIGEVT	DTIS_ENABLE	pulse digit detection enabled
	DTIS_DISABLE	pulse digit detection disabled

NOTE: When the DTG_T1ERREVT, DTG_E1ERREVT, DTG_SIGEV, or DTG_PDIGEVT event is generated, call the **sr_getevtdatap()** function in the event handler to get a pointer to the event value. The pointer should be cast to an unsigned short pointer and the event retrieved as an unsigned short value.

Refer to *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL data structures and functions.

■ Cautions

This function will fail under the following conditions:

- The board or time slot device handle is invalid.
- The event field is invalid.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;                  /* Board device handle */
    unsigned short bitmaskp;   /* Bitmask variable */

    /*
     * Open board 1 device
     */
    if ( ( devh = dt_open( "dtiBl", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiBl.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Get current T1 error mask
     */
    if ( dt_getevtmsk( devh, DTG_T1ERREVT, &bitmaskp ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }

    /*
     * Check for loss of T-1 digital signal
     */
    if ( bitmaskp & DTEC_LOS) {
        printf( "Loss of T-1 digital signal will be reported \n");
    }
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_setevtmsk()**
- **sr_enbhdlr()**
- **sr_dishdlr()**

gets the current parameter value ***dt_getparm()***

Name:	int dt_getparm(devh,param,valuep)	
Inputs:	int devh unsigned long param void *valuep	• digital network interface logical board device handle • device parameter defined name • pointer to integer variable for parameter value
Returns:	0 on success -1 on failure	
Includes:	srllib.h dtilib.h	
Category:	Parameter Request	
Mode:	synchronous	

■ Description

The **dt_getparm()** function *gets the current parameter value* of the selected digital network interface device parameter.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()
param	Specifies the parameter to be examined
valuep	Points to the variable to which the value of the parameter will be assigned

Table 6 lists each parameter name, its default value, and a brief description.

Table 6. dt_getparm() Parameters

#DEFINE	VALUE	DESCRIPTION
DTG_RDEBON	0-255 (5 default)	debounce value for receive signaling transitions from logical 0 to 1 and 1 to 0 (in 10 ms units). DTG_RDEBON is used for only the debounce on value for DTI/1xx Boards, but is used for both debounce on and debounce off for Digital Network Interface Boards.

dt_getparm() *gets the current parameter value*

#DEFINE	VALUE	DESCRIPTION
DTG_CABTYPE	---	line interface unit (LIU) cable length and type (T1 only):
Digital Network Interface only		
	DTLL_G703	CCITT recommendation G.703, 2.048 MHz
	DTLL_FCC68	FCC part 68 option A, CSU
	DTLL_ANSIT1	ANSI T1.403, CSU
	DTLL_133ABAM	0-133 feet DSX-1 ABAM (default)
	DTLL_266ABAM	133-266 feet DSX-1 ABAM
	DTLL_399ABAM	266-399 feet DSX-1 ABAM
	DTLL_533ABAM	399-533 feet DSX-1 ABAM
	DTLL_655ABAM	533-655 feet DSX-1 ABAM
D/240SC-T1 only		
	DTLL_000	000-110 feet
	DTLL_110	110-220 feet
	DTLL_220	220-330 feet
	DTLL_330	330-440 feet
	DTLL_440	440-550 feet
	DTLL_550	550-655 feet
	DTLL_655	655 feet or greater
	DTLL_SQUARE	square pulse
DTG_CODESUPR	---	bipolar format suppression value (T1 only)
	DTSP_TRAN	transparent (default)
	DTSP_B8ZS	binary 8 zero suppression
	DTSP_BIT7	bit 7 stuffing
DTG_IDLTYP	---	get IDLE value NOTE: The return value will be 0x00 if idle was disabled during board download.

gets the current parameter value

dt_getparm()

#DEFINE	VALUE	DESCRIPTION
	IDLE_7F (T1 default if idle is enabled)	T1 IDLE value is 7FH
	IDLE_54 (E1 default if idle is enabled)	E1 IDLE value is 54H
	IDLE_FF	T1 IDLE value is FFH
	IDLE_D5	E1 IDLE value is D5H
DTG_SETBDM	- - -	get device mode value. This parameter will NOT change the device mode if the digital network interface remote loopback test switch is set to ON.
	DTMD_NORMAL	normal mode (default if digital network interface remote loopback test switch is set to OFF)
	DTMD_XCVRLB	transceiver local loopback mode (used for digital network interface testing)
	DTMD_LIULLB	line interface unit local loopback mode (used for digital network interface testing)
	DTMD_LIURLB	line interface unit remote loopback mode (used by network for network testing)
DTG_SETCLK	- - -	get clock source
	DTC_LOOP (default)	loop timing (clock derived from receive sync; if RLOS detected, falls back to DTC_IND)
	DTC_IND	1.544 MHz (T1) or 2.048 MHz (E1) independent timing
	DTC_NOCLK	no clock

dt_getparm()*gets the current parameter value*

#DEFINE	VALUE	DESCRIPTION
DTG_OOFMAX	0-15 (0 default)	(T1 only) number of out-of-frame errors to allow before sending an alarm (maximum <= 15). For the default value, an alarm is sent after first detected frame error.
DTG_ECRRSTTM	10 (default)	(E1 only) rate, in 100 ms units, to reset the following 3 error-count registers
DTG_BPVCMAX	0 - 255 (255 default)	bipolar violation count saturation
DTG_CECRMAX	0 - 255 (255 default)	(E1 only) CRC error count saturation
DTG_FECRMAX	0 - 255 (4 default)	(E1 only) frame sync error count saturation Caution: Do not use this parameter in T1 applications.
DTG_FECSMAX	0 (default)	(T1 only) frame error count saturation Caution: Do not use this parameter in E1 applications.
DTG_PREWINK	0 (default)	pre-wink transmit delay in 10 ms units
DTG_WINKLEN	15 (default)	transmit wink duration in 10 ms units
DTG_WINKMIN	10 (default)	minimum receive wink time in 10 ms units
DTG_WINKMAX	32 (default)	maximum receive wink time in 10 ms units

gets the current parameter value

dt_getparm()

#DEFINE	VALUE	DESCRIPTION
DTG_RXTXIDLE	0x0F0E (E1 default) 0x0C00 (T1 default)	used to set the receive and transmit idle patterns that must be present prior to waiting for a seizure. The upper byte represents the receive signaling pattern, and the lower byte represents the transmit signaling pattern. Bits 0 to 3 represent transmit A, B, C, and D bits. Bits 8 to 11 represent receive A, B, C, and D bits. OFF=0 and ON=1.
DTG_SEIZESIG	0x0C0F (E1 default) 0x0D01 (T1 default)	used to set the receive signaling pattern that defines a line seizure and the transmit signaling pattern to use for a response. Bits 0 to 3 represent transmit A, B, C, and D bits. Bits 8 to 11 represent receive A, B, C, and D bits. OFF=0 and ON=1.

■ Cautions

1. This function will fail under the following conditions:
 - An invalid digital network interface logical board device handle is specified.
 - The parameter specified is invalid.
2. This function will not fail if time slot devices are open on the digital network interface logical board device.
3. The value of the parameter returned by this function is an integer. The **valuep** pointer is the address of an integer, but should be cast as a void pointer when passed in the parameter field.

■ Example

```
#include <windows.h>          /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;                  /* Board device handle */
    int valuep;                /* Parameter value */
/*
 * Open board 1 device
 */
    if ( ( devh = dt_open( "dtiBl", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiBl.  errno = %d", errno );
        exit( 1 );
    }

/*
 * Get current clock parameter value
 */
    if ( dt_getparm( devh, DTG_SETCLK, ( void * )&valuep ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }

/*
 * Report current clock setting
 */
    if ( valuep & DTC_LOOP ) {
        printf( "Clock is set to loop timing \n");
    }
}
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_BADGLOB** - invalid **param** value
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_setparm()**

<i>dt_getstatistics()</i>	<i>returns the statistics queried</i>
Name:	int dt_getstatistics(a_hSrlDevice, a_statisticsList, a_mode)
Inputs:	<p>a_hSrlDevice • logical board device handle (for example, dtiB1)</p> <p>TSdtStatisticsList* • pointer to statistics</p> <p>a_statisticsList</p> <p>unsigned short a_mode • synchronous/asynchronous</p>
Returns:	0 on success -1 for failure
Includes:	srlib.h dtlib.h
Category:	Statistics Functions
Mode:	synchronous/asynchronous

■ Description

The **dt_getstatistics()** function **returns the statistics queried**. The application must specify the type of statistics to be queried in the *m_StatisticsType* field in the *TSdtStatisticsList* structure. The *m_nStatisticsCount* field specifies the number of statistics returned. The statistics are available as an array of *TSdtLayer1Statistics* structures. In asynchronous mode (EV_ASYNC) the list of statistics is part of the event data.

Parameter	Description
a_hSrlDevice	SRL handle for logical board device
a_statisticsList	Pointer to <i>TSdtStatisticsList</i> structure
a_mode	EV_SYNC or EV_ASYNC

The **dt_getstatistics()** function uses the following data structures either directly or indirectly:

dtStatisticsType, which is defined as follows:

```
typedef enum
{
    dtStatisticsType_Invalid = 0,      /* No statistics to be collected */
    dtStatisticsType_Layer1,         /* All Layer 1 Statistics */
    dtStatisticsType_Max
}dtStatisticsType;
```

returns the statistics queried

dt_getstatistics()

dtStatisticsMode, which is defined as follows:

```
typedef enum
{
    dtStatisticsMode_Invalid = 0,      /* No statistics Mode */
    dtStatisticsMode_Clear,           /* Clear statistics counters */
    dtStatisticsMode_Preserve,        /* Preserve statistics counters */
    dtStatisticsMode_Max
}dtStatisticsMode;
```

dtLayer1StatisticsId, which is defined as follows:

```
typedef enum
{
    dtLayer1StatisticsId_Invalid = 0,
    dtLayer1StatisticsId_LCV = 1,       /* Line Coding Violations (LCV) */
    dtLayer1StatisticsId_PCV,          /* Path Coding Violations (PCV) */
    dtLayer1StatisticsId_ES,           /* Errored Seconds (ES) */
    dtLayer1StatisticsId_SES,          /* Severely Errored Seconds (SES) */
    dtLayer1StatisticsId_UAS,          /* Unavailable Seconds (UAS) */
    dtLayer1StatisticsId_BES,          /* Bursty Errored Seconds (BES) */
    dtLayer1StatisticsId_LOFC,         /* Loss of Frame Count (LOFC) */
    dtLayer1StatisticsId_CSS,          /* Controlled Slip Seconds (CSS) */
    dtLayer1StatisticsId_SEFS,         /* Severely Errored Framing Seconds (SEFS) */
    dtLayer1StatisticsId_LES,          /* Line Errored Seconds (LES) */
    dtLayer1StatisticsId_MAX
}dtLayer1StatisticsId;
```

TSdtLayer1Statistics, which is defined as follows:

```
typedef struct SdtLayer1Statistics
{
    dtLayer1StatisticsId      m_Layer1StatisticsId;
    unsigned int               m_nIntervalTotal;
    unsigned int               m_nCurrentIntervalTimer;
    unsigned int               m_nCurrentValue;
    unsigned int               m_nPreviousValue;
}TSdtLayer1Statistics;
```

TSdtStatisticsList, which is defined as follows:

```
typedef struct SdtStatisticsList
{
    unsigned int m_nVersion;           /* Version of this structure */
    dtStatisticsType m_StatisticsType;  /* Statistics Type */
    dtStatisticsMode m_StatisticsMode;  /* Statistics Mode */
    unsigned int m_nStatisticsCount;   /* Statistics Count */
    union
    {
        TSdtLayer1Statistics  m_Layer1Statistics[dtLayer1StatisticsId_Max];
        }m_Stats;
}TSdtLayer1Statistics;
```

■ Cautions

None.

■ Example

```

/* OS Header Files */
#ifndef WIN32
#include <windows.h>
#include <process.h>      /* _beginthread, _endthread */
#include <cconio.h>
#else
#include <unistd.h>
#endif
#include <stdio.h>
#include <iostream.h>
#include <iomanip.h>
#include <errno.h>
#include <stddef.h>
#include <stdlib.h>
#include <string.h>
#include <signal.h>
#include <sys/timeb.h>
#include <time.h>

/* Dialogic Header Files */
#include <gcip.h>
#include <gclib.h>
#include <gcisdn.h>
#include <dtlib.h>
#include <srllib.h>

bool repeat = true;      /*Global repeat flag and video variable */
bool EventReceived = true;
LINEDEV a_LineDev=0;
LINEDEV a_BoardDev=0;
void sig_hdlr(int temp);
void OpenBoard(void);

long EventHandler (unsigned long temp)
{
    unsigned int Loop=0;
    int dev=sr_getevtdev();
    long event=sr_getevttype();
    TSdtStatisticsList* myStatisticsList=(TSdtStatisticsList*) sr_getevtdatap();
    printf("DevH = %d Event = 0x%X\n",dev,event);
    if(event==DTEV_GETSTATISTICS)
    {
        printf("TSdtStatisticsList - Version(%d) StatisticsType(0x%X) Count(%d)
Mode(%d)\n",
               myStatisticsList->m_nVersion,myStatisticsList->m_StatisticsType,
               myStatisticsList->m_nStatisticsCount,myStatisticsList->m_StatisticsMode);
        for(Loop=0;Loop<myStatisticsList->m_nStatisticsCount;Loop++)
        {
            printf("TSLayer1Statistics(%d) - Version(%d) StatisticsId(%d) Interval
Total(%d) CurrentIntervalTimer(%d) CurrentValue(%d) PreviousValue(%d)\n",
                   Loop,

```

returns the statistics queried ***dt_getstatistics()***

```
myStatisticsList->m_Stats.m_Layer1Statistics[Loop].m_nVersion,
myStatisticsList->m_Stats.m_Layer1Statistics[Loop].m_Layer1StatisticsId,
myStatisticsList->m_Stats.m_Layer1Statistics[Loop].m_nIntervalTotal,
myStatisticsList->m_Stats.m_Layer1Statistics[Loop].m_nCurrentIntervalTimer,
myStatisticsList->m_Stats.m_Layer1Statistics[Loop].m_nCurrentValue,
myStatisticsList->m_Stats.m_Layer1Statistics[Loop].m_nPreviousValue);
}
EventReceived=true;
}
Return 0;
}

int main(void)
{
    /* Start Global Call */
    signal(SIGINT,(void (*) (int))sig_hdlr);
    signal(SIGTERM, (void (*) (int))sig_hdlr);
    if (qc_Start (NULL) !=GC_SUCCESS) {
        printf("gc_Start(startp = NULL) Failed\n");
        exit(0);
    }
    OpenBoard();
    gc_Close(a_BoardDev);
    gc_Stop();
    return 0;
}

void sig_hdlr(int temp)
{
    cout << "Inside sig_hdlr -> Resetting repeat flag!!" << endl;
    repeat=false,
}

void OpenBoard(void)
{
    TSdtStatisticsList myStatisticsList;
    int t_NetworkBoardDev=0;
    char a_DeviceName[120];
    strcpy(a_DeviceName,":N_dtib1:P_ISDN");
    /* Open the board device */
    if (gc_OpenEx(&a_BoardDev,a_DeviceName, EV_SYNC, 0) != GC_SUCCESS)
    {
        printf("gc_OpenEx() failed for :%s\n",a_DeviceName);
        exit (0);
    }
    else
        printf("gc_OpenEx() successful for %s- Device Handle = %d\n",
               a_DeviceName,a_BoardDev);
    Sleep(7000);
    If (sr_enbhdlr(EV_ANYDEV, EV_ANYEVT, &EventHandler) < 0)
        cout << "Error enabling the eveng handler" << endl;

//Query All Layer1 metrics and clear the counters after the query
memset(&myStatisticsList,0,sizeof(TSdtStatisticsList));
myStatisticsList.m_nVersion=TSdtStatisticsList_VERSION_0;
myStatisticsList.m_StatisticsType=dtStatisticsType_Layer1;
myStatisticsList.m_StatisticsMode=dtStatisticsMode_Preserve;

while(repeat)
{
    if(EventReceived)
    {
```

dt_getstatistics()*returns the statistics queried*

```
    Sleep(5000);
    qc_GetNetworkH(aBoardDev,&t_NetworkBoardDev);
    EventReceived=false;
    printf("Trying dt_getstatistics\n");
    if(dt_getstatistics(t_NetworkBoardDev,&myStatisticsList,EV_ASYNC) != 0)
    {
        printf("dt_getstatistics failed on %s Error = %s\n",
               ATDV_NAMEP(t_NetworkBoardDev),ATDV_ERRMSGP(t_NetworkBoardDev));
        repeat = false;
    }
    else Sleep( 1000 );
}
}
```

■ Errors

Possible errors for this function include:

- **EDT_INVTS** – invalid DTI device handle
- **EDT_PARAMERR** – invalid parameter
- **EDT_TMOERR** – synchronous function timed out waiting for reply

■ See Also

None.

returns the SCbus time slot

dt_getxmitslot()

Name:	int dt_getxmitslot(devh,sc_tsinfop)
Inputs:	int devh SC_TSINFO *sc_tsinfop
	• digital network interface device time slot • pointer to SCbus time slot information structure
Returns:	0 on success -1 if error
Includes:	srlib.h dtilib.h
Category:	SCbus Routing
Mode:	synchronous

■ Description

The **dt_getxmitslot()** function *returns the SCbus time slot* connected to the transmit of a digital network interface device time slot.

NOTE: The SCbus convenience function **nr_scroute()** includes **dt_getxmitslot()** functionality; see the *Dialogic® Voice API Library Reference*.

Parameter	Description
devh	Specifies the valid digital network interface time slot device handle returned by a call to dt_open()
sc_tsinfop	Specifies the pointer to the data structure SC_TSINFO

The *sc_numts* member of the SC_TSINFO structure must be initialized with the number of SCbus time slots requested (1 for a digital network interface device time slot). The *sc_tsarrayp* member of the SC_TSINFO structure must be initialized with a pointer to a valid array. Upon return from the function, the array will contain the number (between 0 and 1023) of the SCbus time slot on which the digital network interface device time slot transmits. The SC_TSINFO structure is declared as follows:

```
typedef struct {
    unsigned long    sc_numts;
    long            *sc_tsarrayp;
} SC_TSINFO;
```

A digital network interface device time slot can transmit on only one SCbus time slot.

dt_getxmitslot()*returns the SCbus time slot***■ Cautions**

This function will fail if an invalid time slot device handle is specified.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main( )
{
    int devh;                  /* Time slot device handle */
    SC_TSINFO sc_tsinfo;       /* Time slot information structure */
    long scts;                 /* SCbus time slot */

    /* Open board 1 time slot 1 for Digital network interface device */
    if ((devh = dt_open("dtiB1T1", 0)) == -1) {
        printf("Cannot open time slot dtiB1T1.  errno = %d", errno);
        exit(1);
    }

    /* Fill in the SCbus time slot information */
    sc_tsinfo.sc_numts = 1;
    sc_tsinfo.sc_tsarrayp = &scts;

    /* Get SCbus time slot connected to transmit of time slot (digital
    channel) 1 on board 1 */
    if (dt_getxmitslot(devh, &sc_tsinfo) == -1) {
        printf("Error message = %s", ATDV_ERRMSGP(devh));
        exit(1);
    }

    printf("%s is transmitting on SCbus time slot %d", ATDV_NAMEP(devh),
    scts);
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - board missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid time slot device handle
- **EDT_INVMMSG** - invalid message
- **EDT_SH_BADLCLTS** - invalid local time slot number
- **EDT_SH_BADINDEX** - invalid switch handler library index number
- **EDT_SH_BADMODE** - invalid switch handler bus configuration
- **EDT_SH_BADTYPE** - invalid local time slot type
- **EDT_SH_LCLDSCNCT** - local time slot is already disconnected from the SCbus
- **EDT_SH_LIBBSY** - switch handler library busy
- **EDT_SH_LIBNOTINIT** - switch handler library is uninitialized
- **EDT_SH_MISSING** - switch handler is not present
- **EDT_SH_NOCLK** - switch handler clock fallback failed
- **EDT_SYSTEM** - system error
- **EDT_TMOERR** - timed out waiting for reply from firmware

■ See Also

In the *Dialogic® Voice API Library Reference*:

- **ag_listen()**
- **dx_listen()**

dt_listen()***connects the digital listen channel***

Name:	int dt_listen(devh,sc_tsinfop)
Inputs:	int devh SC_TSINFO *sc_tsinfop
	<ul style="list-style-type: none"> • digital network interface device handle • pointer to SCbus time slot information structure
Returns:	0 on success -1 if error
Includes:	srlib.h dtilib.h
Category:	SCbus Routing
Mode:	synchronous

■ Description

The **dt_listen()** function **connects the digital listen channel** to the SCbus time slot. This function uses the information stored in the SC_TSINFO structure to connect the digital receive (listen) channel (T1/E1 time slot) such as on a Dialogic® D/240SC-T1 or D/300SC-E1 Board to an SCbus time slot. This function sets up a half-duplex connection. For a full-duplex connection, the receive (listen) channel of the other device must be connected to the digital transmit channel.

NOTE: The SCbus convenience function **nr_scroute()** includes **dt_listen()** functionality.

Parameter	Description
devh	Specifies the valid digital network interface time slot device handle returned by a call to dt_open()
sc_tsinfop	Specifies the pointer to the SC_TSINFO data structure

The SC_TSINFO structure is declared as follows:

```
typedef struct {
    unsigned long sc_numts;
    long *sc_tsarrayp;
} SC_TSINFO;
```

The *sc_numts* member of the SC_TSINFO structure must be set to 1. The *sc_tsarrayp* field of the SC_TSINFO structure must be initialized with a pointer to a valid array. The first element of this array must contain a valid SCbus time slot number (between 0 and 1023) which was obtained by issuing an **xx_getxmitslot()** function (*xx* = ag, dt, dx, or fx). Upon return from the **dt_listen()** function, the digital receive channel will be connected to this time slot.

Although multiple SCbus device channels may listen (be connected) to the same SCbus time slot, a digital receive (listen) channel can connect to only one SCbus time slot.

■ Cautions

This function will fail under the following conditions:

- An invalid device handle is specified.
- An invalid SCbus time slot number is specified.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main( )
{
    int voxh;                  /* Voice channel device handle */
    int dtih;                  /* Digital channel (time slot) device handle */
    SC_TSINFO sc_tsinfo;       /* Time slot information structure */
    long scts;                 /* SCbus time slot */

    /* Open board 1 channel 1 device */
    if ((voxh = dx_open("dxxxB1C1", 0)) == -1) {
        printf("Cannot open channel dxxxB1C1.  errno = %d", errno);
        exit(1);
    }

    /* Fill in the SCbus time slot information */
    sc_tsinfo.sc_numts = 1;
    sc_tsinfo.sc_tsarrayp = &scts;

    /* Get SCbus time slot connected to transmit of channel 1 on board 1 */
    if (dx_getxmitslot(voxh, &sc_tsinfo) == -1) {
        printf("Error message = %s", ATDV_ERRMSGP(voxh));
        exit(1);
    }

    /* Open board 1 time slot 1 on Digital network interface device */
    if ((dtih = dt_open("dtiB1T1", 0)) == -1) {
        printf("Cannot open time slot dtiB1T1.  errno = %d", errno);
        exit(1);
    }

    /* Connect the receive of digital channel (time slot) 1 on board 1 to
     * SCbus transmit time slot of voice channel 1*/
    if (dt_listen(dtih, &sc_tsinfo) == -1) {
        printf("Error message = %s", ATDV_ERRMSGP(dtih));
        exit(1);
    }
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - board missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid time slot device handle
- **EDT_INVMMSG** - invalid message
- **EDT_SH_BADLCLTS** - invalid local time slot number
- **EDT_SH_BADEXTTS** - external time slot unsupported at current clock rate
- **EDT_SH_BADINDEX** - invalid switch handler library index number
- **EDT_SH_BADMODE** - invalid switch handler bus configuration
- **EDT_SH_BADTYPE** - invalid local time slot type
- **EDT_SH_LCLTSCNCT** - local time slot is already connected to SCbus
- **EDT_SH_LIBBSY** - switch handler library busy
- **EDT_SH_LIBNOTINIT** - switch handler library is uninitialized
- **EDT_SH_MISSING** - switch handler is not present
- **EDT_SH_NOCLK** - switch handler clock fallback failed
- **EDT_SYSTEM** - system error
- **EDT_TMOERR** - timed out waiting for reply from firmware

■ See Also

- **dt_unlisten()**

dt_open()***opens a digital network interface device***

Name:	int dt_open(name,oflags)	
Inputs:	char *name int oflags	<ul style="list-style-type: none"> • digital network interface logical board or time slot device name • open attribute flags; reserved for future use
Returns:	device handle if successful -1 on failure	
Includes:	srlib.h dtlib.h	
Category:	Resource Management	
Mode:	synchronous	

■ Description

The **dt_open()** function **opens a digital network interface device** and returns a unique handle to identify the device. All subsequent references to the opened device must use the returned device handle.

All digital network interface logical boards and time slot devices can be opened with this function. Opening a digital network interface device does not alter the state of the device. Opening or closing a digital network interface device does not affect other processes using the device, but a command can only be issued while the device is idle.

NOTE: If a parent process opens a device and enables events, there is no guarantee that the child process will receive a particular event. It is recommended that you open devices in a parent process and enable events in a child process.

Parameter	Description
name	Points to an ASCIIZ string that contains the name of a valid digital network interface logical board or time slot device. The digital network interface logical board device names are defined in the configuration file when the Dialogic® Software is installed. Valid digital network interface logical board and time slot device names are usually found in the /dev directory.

Parameter	Description
	To avoid conflict between the DTI/ driver and the generic driver, follow the guidelines below when defining devices in the configuration files: The name of the D/xxxSC device defined in <i>/usr/dialogic/cfg/.voxcfg</i> may be in the form dtiBx, dtiBx, dtiBxTy, or dtiBxTy where: <ul style="list-style-type: none">• x is the logical board device number (e.g., 1, 2, 3, ...)• y is the time slot number beginning with 1 (e.g., 1, 2, .. 24)
NOTE:	The devices are named dtiBx and dtiBxTy by default, but may be named dtiBx or dtiBxTy to allow backwards compatibility for previously designed applications.
oflags	Reserved for future use. Set this parameter to 0.

■ Cautions

1. This function will fail under the following conditions:
 - The device name is not valid.
 - The device is already open.
 - The system has insufficient memory to complete the open.
2. For T1 systems, time slot number must be in the range of 1 to 24.
3. For E1 systems, time slot number must be in the range of 1 to 30.
4. Devices should **never** be opened using the **open()** function.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;           /* Board device handle */

    /*
     * Open board 1 device
     */
    if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiB1.  errno = %d", errno );
        exit( 1 );
    }

    .
}


```

■ Errors

The **dt_open()** function does not return errors in the standard digital network interface return code format because it is a system error. If an error occurs during the **dt_open()** call, a -1 will be returned and the specific error message will be returned in the **errno** global variable. If a call to **dt_open()** is successful, the return value is a valid handle for the open device.

■ See Also

- **dt_close()**

<i>runs diagnostics</i>	<i>dt_rundia()</i>
-------------------------	---------------------

Name:	int dt_rundia(devh,tmo,diagbufp)						
Inputs:	<table><tr><td>int devh</td><td>• digital network interface logical board device handle</td></tr><tr><td>int tmo</td><td>• timeout value</td></tr><tr><td>char *diagbufp</td><td>• pointer to 1-byte buffer for diagnostic code</td></tr></table>	int devh	• digital network interface logical board device handle	int tmo	• timeout value	char *diagbufp	• pointer to 1-byte buffer for diagnostic code
int devh	• digital network interface logical board device handle						
int tmo	• timeout value						
char *diagbufp	• pointer to 1-byte buffer for diagnostic code						
Returns:	0 on success -1 on failure						
Includes:	srllib.h dtilib.h						
Category:	Diagnostic						
Mode:	synchronous/asynchronous						

■ Description

The **dt_rundia()** function *runs diagnostics* on the network firmware. The function can operate in synchronous (blocking) or asynchronous (non-blocking) mode.

Note the following guidelines when using this function:

- This function can be issued at any time, but it is recommended that all time slots be idle and closed.
- This function is destructive to calls in progress.
- The board will be restored to its previous state, that is, the state the board was in before the function was called.
- The function should take about 5 seconds to complete.

Parameter	Description
devh	Specifies the valid digital network interface board device handle returned by a call to dt_open()
tmo	When operating the function in synchronous mode, specifies the length of time in seconds the function will block while waiting for a response from the device
diagbufp	Pointer to a one-byte data buffer to which the diagnostic code will be returned when the function is operating in synchronous mode

<i>dt_rundiag()</i>	<i>runs diagnostics</i>
-----------------------------	-------------------------

Synchronous Mode

To operate the function in synchronous (blocking) mode, specify in **tmo** the length of time in seconds that the function will block. This causes the application to wait for a return from the function before performing any other processing. A suggested setting for **tmo** is 5.

Asynchronous Mode

To operate the function in asynchronous (non-blocking) mode, set **tmo** to 0. This allows the application to continue processing while waiting for a completion event from the device.

If event handling is set up properly for your application, DTEV_RET_DIAG is returned by the SRL **sr_getevtype()** function when the diagnostics are successfully completed.

To use this function in asynchronous mode, you must use the SRL **sr_enbhdlr()** function to enable trapping of the event and create an event handler to process the completion event returned by the device. See *Appendix A – Dialogic® Standard Runtime Library* for more information on digital network interface event management.

NOTE: To run this function in asynchronous operation, you must pass a NULL pointer to **diagbufp**.

Diagnostic Return Codes

The diagnostic codes listed below provide results of the diagnostics run on the digital network interface firmware. In synchronous mode, the diagnostic codes are returned to the one-byte buffer pointed to by **diagbufp**. In asynchronous mode, the codes are returned by the SRL **sr_getevtdatap()** function.

- **D2DE_BRDCFG** - invalid board configuration data
- **D2DE_INVEE** - invalid EEPROM data (not valid for Dialogic® D/240SC-T1 Board)
- **D2DE_LIUF FAIL** - read/write to LIU failed
- **D2DE_MEMTST** - memory test failed
- **D2DE_NOERR** - no errors
- **D2DE_ROMCHK** - bad ROM checksum (not valid for Dialogic® D/240SC-T1 Board)

<i>runs diagnostics</i>	<i>dt_rundiag()</i>
-------------------------	----------------------

- **D2DE_XCVRFAIL** - read XCVR register failed

■ Cautions

1. This function will fail under the following conditions:
 - An invalid digital network interface logical board device handle is specified.
 - There is a firmware/hardware problem on the device.
2. Make sure all time slots are closed and idle. This function is destructive to calls in progress.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;                  /* Board device handle */
    int retval;                /* Return value from function call */
    char diagbufp;             /* Diagnostic buffer */
/*
 * Open board 1 device
 */

if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
    printf( "Cannot open board dtiB1.  errno = %d", errno );
    exit( 1 );
}
/*
 * Run diagnostics on the board with a 5 second timeout.
 */
if ( ( retval = dt_rundiaq( devh, 5, &diagbufp ) ) == -1 ) {
    printf("Error activating diag tests: error message = %s\n",
          ATDV_ERRMSGP( devh ) );
}
if ( diagbufp != DTDE_NOERR )
    printf( "Diagnostic buffer value = %d\n", diagbufp );
exit( 1 );
.
.
.
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZEERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error – check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_tstcom()**
- **dt_tstdat()**

dt_setalarm()	sets the alarm handling mode
-----------------------	-------------------------------------

Name:	int dt_setalarm(devh, mode)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical board device handle
	unsigned int mode <ul style="list-style-type: none">• alarm handling mode
Returns:	0 on success -1 on failure
Includes:	srlib.h dtlib.h
Category:	Alarm
Mode:	synchronous

■ Description

The **dt_setalarm()** function **sets the alarm handling mode** of the digital network interface device. The alarm handling mode determines how the digital network interface device and the application interact to perform T1 or E1 alarm handling. For more information on alarm handling, see *Chapter 3. Digital Telephony Overview*.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()
mode	Specifies one of three alarm handling modes: <ul style="list-style-type: none">• DTA_NONE - no firmware controlled alarm handling. All alarm handling must be controlled by the application.• DTA_TERM (default) - terminate alarm handling mode. Alarms in terminate configuration are handled automatically by device firmware. In terminate alarm handling mode, a red alarm will cause the automatic transmission of a yellow alarm.• DTA_DROP (except E1 compatible Digital Network Interface Boards) - drop-and-insert alarm handling mode. Alarm handling duties are shared by application and T1 compatible Digital Network Interface Board firmware. In this mode, alarm transmission responsibilities are left to the application.

■ Cautions

This function will fail under the following conditions:

- An invalid digital network interface logical board device handle is specified.
- The specified mode is invalid.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;           /* Board device handle */

    /*
     * Open board 1 device
     */
    if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiB1.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Set alarm mode to terminate
     */
    if ( dt_setalarm( devh, DTA_TERM ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }

    .
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_BADVAL** - invalid mode passed in parameter
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- ***dt_xmitalarm()***

Name:	dt_setevtmsk(devh,event,bitmask,action)
Inputs:	int devh <ul style="list-style-type: none"> • digital network interface logical board or digital network interface logical time slot device handle int event unsigned short bitmask int action <ul style="list-style-type: none"> • event to be enabled/disabled • bitmask for events • set, add, or subtract bitmask
Returns:	0 on success -1 on failure
Includes:	srlib.h dtlib.h
Category:	Parameter Setting
Mode:	synchronous

■ Description

The **dt_setevtmsk()** function **enables and disables notification for events** that occur on a digital network interface logical board or time slot device. This function allows the application to set and alter a bitmask of transition events. The bitmask determines which transitions will cause an event to be generated.

The event can be retrieved by using the event management functions included in the Standard Runtime Library (refer to *Appendix A – Dialogic® Standard Runtime Library* for more information on the SRL). The current bitmask can be examined by using the **dt_getevtmsk()** function.

Parameter	Description
devh	Specifies the valid digital network interface logical board or digital network interface logical time slot device handle returned by a call to dt_open()
event	Specifies the type of event to be enabled or disabled on the device specified by devh : <ul style="list-style-type: none"> • DTG_T1ERREVT - T1 error events (T1-compatible digital network interface logical board device handles only). Several T1 error events can be monitored. Specific T1 error events are enabled or disabled by setting the bitmask parameter.

Parameter	Description
	<ul style="list-style-type: none">• DTG_E1ERREVT - E1 error events (E1-compatible digital network interface logical board device handles only). Several E1 error events can be monitored. Specific E1 error events are enabled or disabled by setting the bitmask parameter.• DTG_SIGEVT - Signaling bit transition events (time slot device handles only). Specific signaling events are enabled or disabled by setting the bitmask parameter.• DTG_PDIGEVT - pulse digit events (Dialogic® D/xxxSC Board time slot device handles only). <p>NOTE: For Dialogic® D/xxxSC Boards, you must enable both the ON and OFF transitions on a specified bit to get events on that bit. For example, AON and AOFF must be enabled to detect events on the A bit.</p>
bitmask	<p>Specifies the event to be enabled or disabled by setting the bitmask for that event.</p> <p>Multiple transition events may be enabled or disabled with one function call if the bitmask values are logically ORed together.</p> <p>The bitmask values for each event parameter are described in <i>Table 5</i>, found in the <i>dt_getevtmsk()</i> function description.</p>
action	<p>Specifies how the signaling bit transition event mask is changed. Events can be added to or subtracted from those specified in bitmask, or events can replace the existing ones. The possible values for the action parameter are:</p> <ul style="list-style-type: none">• DTA_SETMSK - enable notification of events specified in bitmask and disable notification of previously set events• DTA_ADDMSK - enable notification of events specified in bitmask in addition to previously set events (not valid for DTG_PDIGEVT)• DTA_SUBMSK - disable notification of events specified in bitmask

For example, to enable event notification:

1. Specify the events to enable in the **bitmask** field.
2. Specify the DTA_SETMSK bitmask in the **action** field.

This enables notification of the events specified in the **bitmask** parameter and disables notification of previously set events.

To enable an additional event:

1. Specify the events in **bitmask**.
2. Specify DTA_ADDMSK in the **action** field.

This adds the notification of events specified in **bitmask** without disabling the currently enabled events.

To disable events, use the following procedure:

1. Specify the events in **bitmask**.
2. Specify DTA_SUBMSK in the **action** field.

This disables the event in **bitmask** without disabling any other events.

To disable all currently enabled events:

1. Specify 0 in **bitmask**.
2. Specify DTA_SETMSK in the **action** field.

Event Notification and Handling

NOTE: Event handling operations vary with the mode type (i.e., callback, polled, synchronous, etc.) used by your application. For more information on application development models, refer to the *Dialogic® Standard Runtime Library API Programming Guide*.

To trap and handle a specified digital network interface event, follow these steps in the order listed:

1. Call **sr_enbhdlr()** - This function specifies the event and the application defined event handler that is called when this event occurs.
2. Call **dt_setevtmsk()** - This specifies the list of events for which the application should be notified.

NOTE: When the DTG_T1ERREVT, DTG_E1ERREVT, or DTG_SIGEVT event is generated, call the **sr_getevtdatap()** function in the event handler to get a pointer to the event value. The pointer should be cast to an unsigned short pointer and the event retrieved as an unsigned short value.

Refer to *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL data structures and functions.

■ Cautions

1. This function will fail under the following conditions:
 - An invalid time slot or an invalid digital network interface logical board device handle is specified.
 - The **event** specified is invalid.
 - The **action** specified is invalid.
2. For the application to process an event, the SRL **sr_enbhdlr()** Event Management function should be called prior to calling the **dt_setevtmsk()** function.
3. When a wink event occurs, the signaling bits associated with the wink will be reported to the application. Therefore, your application's signaling event handlers must make sure that *any* transition of the selected wink signaling bit is not part of a wink event.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srlib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;           /* Time slot device handle */
    /*
     * Open board 1 time slot 1 device
     */
    if ( ( devh = dt_open( "dtiBlT1", 0 ) ) == -1 ) {
        printf( "Cannot open device dtiBlT1.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Enable an event handler to catch AON and AOFF events
     */
    .
    .
    .

    /*
     * Enable AON and AOFF signaling transition events
     */
    if ( dt_setevtmsk(devh, DTG_SIGEV, DIMM_AON | DIMM_AOFF, DTA_SETMSK )
        ts== -1 ) {
        printf( "Error message = %s.",ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
    .
    .
}

}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_getevtmsk()**
- **sr_enbhdlr()**
- **sr_dishdlr()**

<i>enables or disables transmission</i>	<i>dt_setidle()</i>
<p>Name: int dt_setidle(devh,state)</p> <p>Inputs: int devh unsigned int state</p> <p>Returns: 0 on success -1 on failure</p> <p>Includes: srllib.h dtilib.h</p> <p>Category: Time Slot Audio</p> <p>Mode: synchronous</p>	<ul style="list-style-type: none"> • digital network interface logical time slot device handle • idle state of time slot

■ Description

The **dt_setidle()** function **enables or disables transmission** of a continuous stream of silence to the network for the audio portion of the specified time slot. Transmitting silence is referred to as “idling” or “inserting idle” on a time slot.

When two digital network interface boards are arranged in a drop-and-insert configuration, this function can be used to disable pass-through operation. Transmitting idle overrides voice data being passed between network devices on the selected time slot.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()
state	Specifies whether to enable or disable the transmission of silence. The possible values are: <ul style="list-style-type: none"> • DTIS_DISABLE - disable idling on the time slot • DTIS_ENABLE - enable idling on the time slot

The default idle value transmitted is 7FH (T1 only) or 54H (E1 only). It is recommended to initialize the device idle value to a known state before idling a time slot. The device idle value is set using the **dt_setparm()** function with the parameter DTG_IDLTYP. The values of this parameter can be set as follows:

- **IDLE_7F** - sets idle value to 7FH (T1 only)
- **IDLE_FF** - sets idle value to FFH (T1 only)
- **IDLE_54** - sets idle value to 54H (E1 only)

<i>dt_setidle()</i>	<i>enables or disables transmission</i>
-----------------------------	--

- **IDLE_D5** - sets idle value to D5H (E1 only)

■ Cautions

This function will fail under the following conditions:

- An invalid logical time slot device handle is specified.
- The state specified is invalid.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>
main()
{
    int devh;                  /* Time slot device handle */
/*
 * Open time slot 1 on board 1
 */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Failed to open device dtiB1T1. errno = %d\n", errno );
        exit( 1 );
    }
/*
 * Set signaling mode to signaling insertion
 */
    if ( dt_setsigmod( devh, DTM_SIGINS ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }
/*
 * Disable silence transmission
 */
    if ( dt_setidle( devh, DTIS_DISABLE ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }
/*
 * Go offhook
 */
    if ( dt_settssig( devh, DTB_ABIT | DTB_BBIT, DTA_SETMSK ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_IDLEST()**
- **dt_setsigmod()**

dt_setparm()*changes the value of a DNI device parameter*

Name:	int dt_setparm(devh,param,valuep)
Inputs:	int devh unsigned long param void* valuep
	<ul style="list-style-type: none"> • digital network interface logical board device handle • device parameter defined name • pointer to device parameter value
Returns:	0 on success -1 on failure
Includes:	srlib.h dtilib.h
Category:	Parameter Setting
Mode:	synchronous

■ Description

The **dt_setparm()** function changes the value of a DNI device parameter.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()
param	Specifies the parameter value to alter
valuep	Specifies the address of the integer containing the value to be assigned to the parameter

All time slots on the selected digital network interface device must be closed when this function is called.

Table 6, found in the **dt_getparm()** function description, lists each parameter name, its default value, and a brief description.

■ Cautions

1. This function will fail under the following conditions:
 - An invalid digital network interface logical board device handle is specified.
 - One or more time slots on the digital network interface device are open.
 - The parameter specified is invalid.
 - The digital network interface is in test mode (remote loopback switch set to ON) and DTG_SETBDMD is passed in the **param** field.
2. Changing a digital network interface device parameter affects all the time slots on the logical board. All the time slots on a logical board must be closed when device parameters are altered.
3. All values of the parameter have to be integers, but since this routine expects a void pointer to **valuep**, the address must be cast as a void*.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srlib.h>
#include <dtlib.h>
#include <errno.h>
main()
{
    int devh;           /* Board device handle */
    int valuep;         /* Parameter value */
/*
 * Open board 1 device
 */
if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
    printf( "Cannot open board dtiB1.  errno = %d", errno );
    exit( 1 );
}
/*
 * Set current clock parameter value
 */
valuep = DTC_EXT;
if ( dt_setparm( devh, DTG_SETCLK, ( void * )&valuep ) == -1 ) {
    printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
    exit( 1 );
}
.
.
.
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_BADGLOB** - invalid **param**
- **EDT_BADVAL** - invalid parameter value passed in **valuep** pointer
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOCLK** - no clock source present
- **EDT_NOIDLEERR** - time slot not in idle/closed state
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware
- **EDT_TSTMOD** - in test mode; cannot set digital network interface mode

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_getparm()**

sets the type of signaling ***dt_setsigmod()***

Name:	int dt_setsigmod(devh,mode)
Inputs:	int devh unsigned int mode
	• digital network interface logical time slot device handle • transmit mode
Returns:	0 on success -1 on failure
Includes:	srlib.h dtlib.h
Category:	Time Slot Signaling
Mode:	synchronous

■ Description

The **dt_setsigmod()** function *sets the type of signaling* that will be performed on the transmitted time slot.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()
mode	Specifies the transmit mode. Possible values are: • DTM_SIGINS - set to signaling insertion

Signaling Insertion

When a time slot is set to signaling insertion, transmit signaling for the selected time slot is inserted by the digital network interface. The digital network interface can insert signaling information over the transmit signaling already on that time slot.

■ Cautions

This function will fail under the following conditions:

- An invalid digital network interface logical time slot device handle is specified.
- The mode specified is invalid.

■ Example

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;                  /* Time slot device handle */

    /*
     * Open time slot 1 on board 1
     */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Failed to open device dtiB1T1.  errno = %d\n", errno );
        exit( 1 );
    }

    /*
     * Set signaling mode to signaling insertion
     */
    if ( dt_setsigmod( devh, DTM_SIGINS ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }
    .
    .
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_BDMODE()**
- **ATDT_BDSGBT()**
- **ATDT_TS MODE()**
- **ATDT_TSSGBT()**
- **dt_settssig()**

<i>dt_settssig()</i>	<i>sets or clears the transmit</i>
------------------------------	---

Name:	int dt_settssig(devh,bitmask,action)						
Inputs:	<table><tr><td>int devh</td><td>• digital network interface logical time slot device handle</td></tr><tr><td>unsigned short bitmask</td><td>• signaling bits to change</td></tr><tr><td>int action</td><td>• set, add, or subtract bitmask</td></tr></table>	int devh	• digital network interface logical time slot device handle	unsigned short bitmask	• signaling bits to change	int action	• set, add, or subtract bitmask
int devh	• digital network interface logical time slot device handle						
unsigned short bitmask	• signaling bits to change						
int action	• set, add, or subtract bitmask						
Returns:	0 on success -1 on failure						
Includes:	srllib.h dtlib.h						
Category:	Time Slot Signaling						
Mode:	synchronous						

■ Description

The **dt_settssig()** function **sets or clears the transmit** for the time slot requested.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()
bitmask	Specifies which signaling bits to change. All signaling bits may be changed with one function call if the bitmask values are logically ORed together as in the example. The possible values for the bitmask parameter are: <ul style="list-style-type: none">• DTB_ABIT - “A” signaling bit• DTB_BBIT - “B” signaling bit• DTB_CBIT - “C” signaling bit (E1 only)• DTB_DBIT - “D” signaling bit (E1 only)
action	Specifies whether the signaling bits in the mask should be set or cleared (i.e., set to 1 or cleared to 0). The possible values are: <ul style="list-style-type: none">• DTA_SETMSK - set bits specified in bitmask and clear all other bits.• DTA_ADDMSK - set bits specified in bitmask. This will not affect other bits that are currently set.• DTA_SUBMSK - clear bits in specified bitmask. This will not affect other bits that are currently set.

■ Cautions

This function will fail under the following conditions:

- An invalid digital network interface logical time slot device handle is specified.
- The action specified is invalid.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>
main()
{
    int devh;           /* Time slot device handle */
/*
 * Open time slot 1 on board 1
 */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Failed to open device dtiB1T1.  errno = %d\n", errno );
        exit( 1 );
    }
/*
 * Set signaling mode to signaling insertion
 */
    if ( dt_setsigmod( devh, DTM_SIGINS ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
/*
 * Go offhook
 */
    if ( dt_setssig( devh, DTB_ABIT | DTB_BB1T, DTA_SETMSK ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
    :
    :
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_BDMODE()**
- **ATDT_BDSGBT()**
- **ATDT_TS MODE()**
- **ATDT_TSSGBT()**
- **dt_setsigmod()**

simultaneous setting or clearing of transmit signaling bits dt_settssigsim()

Name:	int dt_settssigsim(devh,bitmask)
Inputs:	int devh unsigned short bitmask
	• digital network interface logical time slot device handle • signaling bits to simultaneously clear and set
Returns:	0 on success -1 on failure
Includes:	srlib.h dtilib.h
Category:	Time Slot Signaling
Mode:	synchronous

■ Description

The **dt_settssigsim()** allows **simultaneous setting or clearing of transmit signaling bits** on a digital network interface time slot. The bitmask parameter specifies which signaling bits to change. To simultaneously set and clear the transmit signaling bits, the chosen values can be logically ORed together.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()
bitmask	Specifies which signaling bits to change. All signaling bits may be changed with one function call if the bitmask values are logically ORed together as in the example. The possible values for the bitmask parameter are: <ul style="list-style-type: none">• DTB_AON - “A” signaling bit on• DTB_AOFF - “A” signaling bit off• DTB_BON - “B” signaling bit on• DTB_BOFF - “B” signaling bit off• DTB_CON - “C” signaling bit on (E1 only)• DTB_COFF - “C” signaling bit off (E1 only)• DTB_DON - “D” signaling bit on (E1 only)• DTB_DOFF - “D” signaling bit off (E1 only)

dt_setssigsim() simultaneous setting or clearing of transmit signaling bits

■ Cautions

This function will fail if an invalid digital network interface logical time slot device handle is specified.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>
main()
{
    int devh;           /* Time slot device handle */
/*
 * Open time slot 1 on board 1
 */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Failed to open device dtiB1T1.  errno = %d\n", errno );
        exit( 1 );
    }
/*
 * Set signaling mode to signaling insertion
 */
    if ( dt_setsigmod( devh, DTM_SIGINS ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
/*
 * Set A & C time slot bits while clearing the B bit simultaneously
 * the D bit is left untouched
 */
    bitmask = DTB_AON | DTB_CON | DTB_BOFF;
    if ( dt_setssigsim( devh, bitmask ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
    .
}
}
```

simultaneous setting or clearing of transmit signaling bits ***dt_settssigsim()***

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **ATDT_BDMODE()**
- **ATDT_BDSGBT()**
- **ATDT_TS MODE()**
- **ATDT_TSSGBT()**
- **dt_setsigmod()**

`dt_tstcom()`***tests the ability of a digital network interface device***

Name:	int <code>dt_tstcom(devh,tmo)</code>
Inputs:	int devh • digital network interface logical board device handle
	int tmo • timeout value
Returns:	digital network interface return code -1 on failure
Includes:	<code>srllib.h</code> <code>dtilib.h</code>
Category:	Diagnostic
Mode:	synchronous/asynchronous

■ Description

The **`dt_tstcom()`** function **tests the ability of a digital network interface device** to communicate with the host PC. This function can operate in either synchronous (blocking) or asynchronous (non-blocking) mode.

Note the following guidelines when using this function:

- This function can be issued at any time, but it is recommended that all time slots be idle and closed.
- This function has no effect on calls in progress.
- This function has no effect on the state of the board.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to <code>dt_open()</code>
tmo	Specifies the maximum amount of time in seconds that the function will block while waiting for a response from the digital network interface. If a response is not returned within tmo seconds, an error is returned.

Synchronous Mode

To run this function in synchronous (blocking) mode, set **tmo** to the length of time, in seconds, to wait for a return. If a response is not returned within **tmo** seconds, an error is returned. A suggested **tmo** setting for this function is 5.

Asynchronous Mode

To operate this function in asynchronous (non-blocking) mode, specify 0 for **tmo**. This allows the application to continue processing while waiting for a completion event. If event handling is set up properly for your application, DTEV_COMRSP will be returned by the **sr_getevtype()** function included in the SRL when the test is successfully completed. See *Appendix A – Dialogic® Standard Runtime Library* for information on event handling.

■ Cautions

1. This function returns a failure under the following conditions:
 - The specified device fails to respond within **tmo** seconds, if operating in synchronous mode.
 - A time slot or invalid digital network interface logical device handle is specified.
 - There is a hardware problem on the digital network interface.
 - There is a configuration problem (for example, IRQ conflict).
2. To use this function in asynchronous mode, you must use the SRL **sr_enbhldr()** function to enable trapping of events and create an event handler to process the completion event returned by the device.

The event can be detected by using the event management functions included in the Dialogic® Standard Runtime Library. See *Appendix A – Dialogic® Standard Runtime Library* for more information on digital network interface event management.

■ Example

```
#include <windows.h>          /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>

main()
{
    int devh;                  /* Board device handle */
/*
 * Open board 1 device
 */
    if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiB1.  errno = %d", errno );
        exit( 1 );
    }

/*
 * Test the board's ability to communicate with the system.  Give it 5
 * seconds to complete.
 */
    if ( dt_tstcom( devh, 5 ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }
    .
    .
}

}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_tstdat()**
- **dt_rundiag()**

dt_tstdat()*performs a test*

Name:	int dt_tstdat(devh,tmo)
Inputs:	int devh unsigned int tmo
	<ul style="list-style-type: none"> • digital network interface logical board device handle • timeout value
Returns:	0 on success -1 on failure
Includes:	srlib.h dtilib.h
Category:	Diagnostic
Mode:	synchronous/asynchronous

■ Description

The **dt_tstdat()** function **performs a test** that verifies the integrity of the digital network interface I/O interface to the PC. The data test is performed by sending a series of bytes to the digital network interface and checking the integrity of the bytes returned.

Note the following guidelines when using this function:

- This function can be issued at any time, but it is recommended that all time slots be idle and closed.
- This function has no effect on calls in progress.
- This function has no effect on the state of the board.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()
tmo	Specifies the maximum amount of time in seconds that the function will block while waiting for a response from the digital network interface

Asynchronous Mode

To operate this function in asynchronous (non-blocking) mode, specify 0 for **tmo**. This allows the application to continue processing while waiting for a completion event. If event handling is set up properly for your application, DTEV_DATRSP will be returned by the **sr_getevtype()** function included in the SRL when the

test is successfully completed. See *Appendix A – Dialogic® Standard Runtime Library* for information on event handling.

Synchronous Mode

To run this function in synchronous (blocking) mode, set **tmo** to the length of time, in seconds, to wait for a return. If a response is not returned within **tmo** seconds, an error is returned. A suggested **tmo** setting for this function is 5.

■ Cautions

1. This function returns a failure under the following conditions:
 - The test data is corrupted.
 - A time slot or invalid digital network interface logical board device handle is specified.
2. To use this function in asynchronous mode, you must use the SRL **sr_enbhdlr()** function to enable trapping of events and create an event handler to process the completion event returned by the device. The event can be detected by using the SRL event management functions. See *Appendix A – Dialogic® Standard Runtime Library* for more information on digital network interface event management.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main()
{
    int devh;           /* Board device handle */

    /*
     * Open board 1 device
     */
    if ( ( devh = dt_open( "dtiBl", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiBl.  errno = %d", errno );
        exit( 1 );
    }

    /*
     * Perform a data integrity test between the board and PC.  Give it 5
     * seconds to complete.
     */
    if ( dt_tstdat( devh, 5 ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSG( devh ) );
        exit( 1 );
    }
    .
    .
}

}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_tstcom()**
- **dt_rundiag()**

dt_unlisten()	<i>disconnects the receive channel</i>
---------------------------------------	--

Name:	dt_unlisten(devh)
Inputs:	int devh <ul style="list-style-type: none">• digital network interfacedevice time slot
Returns:	0 on success -1 on error
Includes:	srlib.h dtilib.h
Category:	SCbus Routing
Mode:	synchronous

■ Description

The **dt_unlisten()** function [disconnects the receive channel](#) from the SCbus. This function disconnects the digital receive (listen) channel (T1/E1 time slot) such as on a Dialogic® D/240SC-T1 or D/300SC-E1 Board from the SCbus time slot.

Calling the **dt_listen()** function to connect to a different SCbus time slot will automatically break an existing connection. Therefore, when changing connections, you need not call the **dt_unlisten()** function.

NOTE: The SCbus convenience function **nr_scunroute()** includes **dt_unlisten()** functionality; see the *Dialogic® Voice API Library Reference*.

Parameter	Description
devh	Specifies a valid digital network interface time slot device handle returned by a call to dt_open()

■ Cautions

This function will fail if an invalid time slot device handle is specified.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

main( )
{
    int devh;           /* Digital channel (time slot) device handle */

    /* Open board 1 time slot 1 device */
    if ((devh = dt_open("dtiB1T1", 0)) == -1) {
        printf("Cannot open time slot dtiB1T1.  errno = %d", errno);
        exit(1);
    }

    /* Disconnect receive of board 1, time slot 1 from all SCbus time
       slots */
    if (dt_unlisten(devh) == -1) {
        printf("Error message = %s", ATDV_ERRMSGP(devh));
        exit(1);
    }
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - board missing or defective
- **EDT_BADCMDERR** - invalid command parameter to driver
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid time slot device handle
- **EDT_INVMMSG** - invalid message
- **EDT_SH_BADLCLTS** - invalid local time slot number
- **EDT_SH_BADEXTTS** - external time slot unsupported at current clock rate
- **EDT_SH_BADIDX** - invalid switch handler library index number
- **EDT_SH_BADMODE** - invalid switch handler bus configuration
- **EDT_SH_BADTYPE** - invalid local time slot type
- **EDT_SH_LCLDSCNCT** - local time slot is already disconnected from SCbus
- **EDT_SH_LIBBSY** - switch handler library busy
- **EDT_SH_LIBNOTINIT** - switch handler library is uninitialized
- **EDT_SH_MISSING** - switch handler is not present
- **EDT_SH_NOCLK** - switch handler clock fallback failed
- **EDT_SYSTEM** - system error
- **EDT_TMOERR** - timed out waiting for reply from firmware

■ See Also

- **[dt_listen\(\)](#)**

Name:	int dt_xmitalarm(devh, alrmtype, state)
Inputs:	int devh unsigned char alrmtype unsigned int state
	<ul style="list-style-type: none"> • digital network interface logical board device handle • T1 or E1 alarm type • enable or disable sending the alarm
Returns:	0 on success -1 on failure
Includes:	srlib.h dtilib.h
Category:	Alarm
Mode:	synchronous

■ Description

The **dt_xmitalarm()** function starts and stops transmission of an alarm to a network span. For a detailed description of T1 and E1 alarm handling, refer to *Chapter 3. Digital Telephony Overview*.

Parameter	Description
devh	Specifies the valid digital network interface logical board device handle returned by a call to dt_open()
alrmtype	Specifies the T1 or E1 alarm type to be transmitted: <ul style="list-style-type: none"> • YELLOW - T1 only • BLUE - T1 only • DEA_REMOTE - E1 only • DEA_UNFRAMED1 (unframed all 1s) - E1 only • DEA_SIGNALALL1 (signaling all 1s) - E1 only • DEA_DISTANTMF (distant multiframe alarm) - E1 only
state	Specifies whether to enable or disable transmission of the specified alarm: <ul style="list-style-type: none"> • DTIS_DISABLE - disable transmission of alarm • DTIS_ENABLE - enable transmission of alarm

■ Cautions

1. This function will fail under the following conditions:
 - The specified digital network interface device is invalid.
 - The specified **alrmtype** parameter is invalid.
 - The specified **state** parameter is invalid.
2. Transmission of alarms requires that the proper alarm mode is set by the **dt_setalarm()** function.
3. The alarm type transmitted must correspond to the type of network circuit you are using (either T1 or E1).

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>
main()
{
    int devh;           /* Board device handle */
/*
 * Open board 1 device
 */
    if ( ( devh = dt_open( "dtiB1", 0 ) ) == -1 ) {
        printf( "Cannot open board dtiB1.  errno = %d", errno );
        exit( 1 );
    }
/*
 * Transmit a BLUE alarm
 */
    if ( dt_xmitalarm( devh, BLUE, DTIS_ENABLE ) == -1 ) {
        printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
    .
    .
}
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information on SRL functions. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVBD** - invalid digital network interface logical board device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_setalarm()**

<i>dt_xmitwink()</i>	<i>transmits wink signaling</i>
-----------------------------	--

Name:	int dt_xmitwink(devh, tmo)
Inputs:	int devh <ul style="list-style-type: none">• digital network interface logical time slot device handle
	unsigned int tmo <ul style="list-style-type: none">• timeout value
Returns:	0 on success -1 on failure
Includes:	srlib.h dtlib.h
Category:	Time Slot Signaling
Mode:	synchronous/asynchronous

■ Description

The **dt_xmitwink()** function **transmits wink signaling** to the T1 or E1 network span on any of the available signaling bits. The bit to be used and the polarity or beginning state of the wink are configurable through the download parameter file. A wink starts by transmitting signaling state 0, then transmits signaling state 1, and returns to signaling state 0. The signaling bit selected must be in the proper state (state 0) when the **dt_xmitwink()** function is called. Also, the time slot must be in signaling insertion mode to transmit a wink.

Board parameters may be set through **dt_setparm()** to control pre-wink delay and transmit wink duration for all time slots simultaneously.

NOTE: Separate board parameters are provided for setting minimum and maximum receive wink duration. These have no effect on wink transmission.

Parameter	Description
devh	Specifies the valid digital network interface logical time slot device handle returned by a call to dt_open()
tmo	Specifies the maximum amount of time in seconds that the function will block while waiting for a response from the digital network interface

Asynchronous Mode

To operate this function in asynchronous (non-blocking) mode, specify 0 for **tmo**. This allows the application to continue processing while waiting for a completion

event from the device. If event handling is set up properly for your application, DTEV_WINKCPLT is returned by the SRL **sr_getevtype()** function when the wink is successfully completed. See *Appendix A – Dialogic® Standard Runtime Library* for information on event handling.

Synchronous Mode

To run this function in synchronous (blocking) mode, set **tmo** to the length of time, in seconds, to wait for a return. If a response is not returned within **tmo** seconds, an error is returned. A suggested **tmo** setting for this function is 2.

■ Cautions

1. This function will fail under the following conditions:
 - The specified digital network interface logical time slot device handle is invalid.
 - The specified time slot is not in the correct signaling state (must begin in state 0).
 - Signaling insertion is not enabled for the specified time slot device.
 - A T1 system (e.g., the Dialogic® D/240SC-T1 Board) is configured for wink transmission using the C bit or D bit.
 - An application attempts to change signaling mode or signaling bits while wink transmission is in progress.
2. To use this function in asynchronous mode, you must use the SRL **sr_enbhdlr()** function to enable trapping of events and create an event handler to process the completion event returned by the device. The event can be detected by using the SRL event management functions. See *Appendix A – Dialogic® Standard Runtime Library* for more information on digital network interface event management.

■ Example

```
#include <windows.h>      /* For Windows applications only */
#include <srllib.h>
#include <dtilib.h>
#include <errno.h>
main()
{
    int devh;           /* Time slot device handle */
/*
 * Open time slot 1 on board 1
 */
    if ( ( devh = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
        printf( "Failed to open device dtiB1T1.  errno = %d\n", errno );
        exit( 1 );
    }
/*
 * Set signaling bits to a known state
 */
    if ( dt_settsig ( devh, DTB_ABIT | DTB_BB1T, DTA_SUBMSK ) == -1 ) {
        printf( "Error message = %s\n", ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
/*
 * Set signaling mode to signaling insertion
 */
    if ( dt_setsigmod( devh, DTM_SIGINS ) == -1 ) {
        printf( "Error message = %s.",ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
/*
 * Disable silence transmission
 */
    if ( dt_setidle( devh, DTIS_DISABLE) == -1 ) {
        printf( "Error message = %s.",ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
/*
 * Go offhook assuming that wink set to negative polarity on A bit
 */
    if ( dt_setssig( devh, DTB_AB1T, DTA_SETMSK ) == -1 ) {
        printf( "Error message = %s.",ATDV_ERRMSGP( devh ) );
        exit( 1 );
    }
/*
 * Transmit wink with 2 second timeout. Note that this is the blocking
 * (synchronous) mode
*/
if ( dt_xmitwink( devh, 2 ) == -1 ) {

    printf( "Error message = %s.",ATDV_ERRMSGP( devh ) );
    exit( 1 );
}
.
.
.
```

■ Errors

If the function returns -1, use the SRL Standard Attribute function **ATDV_LASTERR()** to obtain the error code or use **ATDV_ERRMSGP()** to obtain a descriptive error message. See *Appendix A – Dialogic® Standard Runtime Library* for more information. The error codes returned by **ATDV_LASTERR()** are:

- **EDT_BADBRDERR** - digital network interface missing or defective
- **EDT_BADCMDERR** - invalid or undefined command to driver
- **EDT_DATTO** - data reception timed out
- **EDT_FWERR** - firmware returned an error
- **EDT_INVTS** - invalid digital network interface logical time slot device handle
- **EDT_NOMEMERR** - cannot map or allocate memory in driver
- **EDT_PARAMERR** - invalid parameter
- **EDT_PDOFFHK** - wink bit not in correct initial state
- **EDT_RANGEERR** - bad/overlapping physical memory range
- **EDT_SIGINS** - signaling insertion not enabled
- **EDT_SIZERR** - message too big or too small
- **EDT_SKIPRPLYERR** - a required reply was skipped
- **EDT_SYSTEM** - system error - check the global variable **errno** for more information about the error
- **EDT_TMOERR** - timed out waiting for reply from firmware
- **EDT_WKACT** - already transmitting wink
- **EDT_WKSIG** - cannot disable insertion when transmitting wink

Error defines can be found in the file *dtilib.h*.

■ See Also

- **dt_setparm()**
- **dt_setsigmod()**
- **dt_settssig()**

6. Application Guidelines

This chapter offers suggestions to guide programmers in designing and coding a digital network interface application.

6.1. Writing a Simple Application

This chapter is not meant to be a comprehensive guide to developing or debugging digital network interface applications. Instead, the following sections provide digital network interface general and task-specific programming guidelines:

- General guidelines
- Initialization
- Processing
- Terminating
- Compiling and linking
- Aborting

6.1.1. General Guidelines

The following general guidelines for writing applications are explained in this section.

- Use symbolic defines
- Include header files
- Check return codes

Use Symbolic Defines

Do not use a numerical value in your application when an equivalent symbolic define is available.

Include Header Files

Various header files must be included in your application to test for error conditions, to use other library functions from this release, or to perform event management and standard attribute functions. An example is shown below. See *Section 4.3. Include Files*, for details.

Dialogic® Digital Network Interface Software Reference

```
#include <windows.h>      /* For Windows applications only */  
#include <srlib.h>  
#include <dtlib.h>  
#include <errno.h>
```

NOTE: To avoid redundancy in the remaining programming examples in this chapter, **#include** statements will not be shown.

Check Return Codes

Most digital network interface library functions return a value of -1 if they fail (extended attribute functions return AT_FAILURE or AT_FAILUREP if they fail). Any call to a digital network interface library function should check for a return value indicating an error. This can be done using a format similar to the following:

```
/* call to digital network interface library function */  
  
if (dt_xxx(arguments) == -1) {  
    /* error handling routine */  
}  
/* successful function call -  
   continue processing ... */
```

Using this technique helps to ensure that all errors resulting from a digital network interface device library call will be trapped and handled properly by the application. In many cases, you can check for a return value of other than zero (0), as shown in the example below. However, this should only be used where a non-zero value is returned when the function fails. See *Section 4.2. Error Handling*, or *Chapter 5. Function Reference*, for function specific details.

6. Application Guidelines

```
    .  
    .  
/* error handling routine */  
void do_error( devh, funcname )  
    int devh;  
    char *funcname;  
{  
    int errorval = ATDV_LASTERR( devh );  
    printf( "Error while calling function %s on device %s. \n", funcname,  
        ATDV_NAMEP( devh ) );  
    if ( errorval == EDT_SYSTEM ) {  
        printf( "errno = %d\n", errno );  
        perror("");  
    } else {  
        printf( "Error value = %d\n Error message = %s\n",  
            errorval,ATDV_ERRMSGP( devh ) );  
    }  
    return;  
}  
  
main( )  
{  
    .  
    .  
    .  
  
/* call to DTI/xxx library function */  
if ( dt_setevtmsk( devh, DTG SIGEVNT, 0, DTA_SETMSK ) ) != 0) {  
    do_error( devh, "dt_setevtmsk()" );  
}  
  
/* successful function call -  
   continue processing ... */  
    .  
    .  
    .  
}
```

- NOTES:**
- 1. Calls to **dt_open()** return either -1 or a non-zero device handle. Therefore, when issuing the **dt_open()** function, check for a return of -1. The specific error can be found in the global variable **errno**, contained in *errno.h*. Calls to **ATDT_BDSGBIT()** return the pointer **AT_FAILUREP** when the function fails.
 - 2. To avoid redundancy in the remaining programming examples in this chapter, the **do_error()** function will not be shown.

The *dtilib.h* header file lists symbolic defines for the error.

6.1.2. Initialization

Before a digital network interface application can perform any processing or access devices, it should initialize the digital network interface hardware to reflect the physical configuration of your system and set other parameters needed to support the application. Tasks that are performed as a part of initialization generally include:

- Set hardware configuration
- Set alarm handling parameters and masks
- Initialize time slots

These involve the following digital network interface device functions:

- **dt_setalarm()**
- **dt_setevtmsk()**
- **dt_setidle()**
- **dt_setparm()**
- **dt_setsigmod()**
- **dt_settssig()**

NOTE: Preferably, parameters set by **dt_setparm()** are those that must be changed while the application is running or that cannot be set through the download parameter file.

Set Hardware Configuration

Use **dt_setparm()** to set hardware configuration, test mode, clock source, and network telephony parameters. Specific settings include:

- Cable type connecting the digital network interface device to the network
- Loopback test mode
- Clock source (see **dt_setparm()** in *Chapter 5. Function Reference* for an example)
- Wink detection and transmission duration

6. Application Guidelines

NOTE: If your application uses the **dt_xmitwink()** function for receipt of Automatic Number Identification (ANI) or Direct Number Identification Service (DNIS) digits, you must make sure that digital network interface wink duration conforms to the proper protocol requirements. Consult your carrier for details.

For specific parameter or mask values to use for configuring your hardware, see the relevant function description(s) in *Chapter 5. Function Reference*.

Set Alarm Handling Parameters and Masks

Use **dt_setalarm()** to set the alarm handling mode for each digital network interface device. Recommended settings are shown in *Table 7*. See **dt_setalarm()** in *Chapter 5. Function Reference* for an example of setting the alarm handling mode.

Table 7. Recommended dt_setalarm() Settings

Telephony Standard	Configuration	Alarm Handling Mode
T1	terminate	DTA_TERM
	drop and insert	DTA_DROP
E1	terminate	DTA_TERM
	drop and insert	DTA_TERM

Use **dt_setevtmsk()** to set the alarm handling masks for each digital network interface device. At a minimum, your application must set masks to detect the T1 or E1 alarm conditions listed below.

NOTE: Unless your application is running in poll mode, your application must issue the SRL **sr_enbhdlr()** function to enable trapping of the event return before setting alarm handling masks with **dt_setevtmsk()**. You must enable event handlers when running in callback or signal mode. See *Section 6.2. Adding Advanced Features*, for more details.

T1 alarms:

- **DTEC_B8ZSD** - bipolar eight zero subs detection
- **DTEC_BPVS** - bipolar violation count saturation
- **DTEC_BVCS** - bipolar violation count saturation
- **DTEC_DPM** - driver performance monitor restored
- **DTEC_ECS** - error count saturation
- **DTEC_FERR** - frame bit error
- **DTEC_LOS** - loss of signal notification
- **DTEC_OOF** - OOF condition mask
- **DTEC_RBL** - receive blue alarm
- **DTEC_RCL** - receive carrier loss
- **DTEC_RCLX** - receive carrier loss
- **DTEC_RED** - receive red alarm
- **DTEC_RLOS** - receive loss of sync
- **DTEC_RYEL** - receive yellow alarm

E1 alarms:

- **DEEC_BPVS** - bipolar violation count saturation
- **DEEC_CECS** - CRC4 error count saturation
- **DEEC_DPM** - driver performance monitor
- **DEEC_ECS** - error count saturation notification
- **DEEC_FSERR** - frame sync error
- **DEEC_LOS** - loss of signal notification
- **DEEC_MFSERR** - multiframe sync error
- **DEEC_RDMA** - receive distant multiframe alarm
- **DEEC_RLOS** - receive loss of sync
- **DEEC_RRA** - receive remote alarm
- **DEEC_RSA1** - receive signaling all 1s alarm
- **DEEC_RUA1** - receive unframed all 1s alarm

Initialize Time Slots

Before making or receiving any calls, an application should initialize all time slots to a known state. Initialization consists of:

- Clearing/setting all signaling event masks
- Setting time slots to the idle state
- Setting the proper signaling mode
- Idling the time slots

6. Application Guidelines

Setting event masks to a known state helps ensure that the application receives only those events it “expects” and can handle appropriately. Use **dt_setevtmsk()** to set the signaling event masks to the desired state.

Setting all time slots to the idle state at the start of your application helps ensure that off-hook/on-hook transitions will be processed correctly. Use **dt_settssig()** to set the state of a time slot to idle.

To generate system signaling from the digital network interface board, it must be in the **signaling insertion mode**. In this mode, signaling from a resource board, such as a Dialogic® D/300SC-E1 Board, will be overwritten by the digital network interface board.

- NOTES:**
- 1.** Before idling a T1 time slot, set the signaling mode to signaling insertion. Use **dt_setsigmod()** to initialize digital network interface time slots signaling insertion mode (DTM_SIGINS), as required.
 - 2.** To transmit a wink to the network, the digital network interface time slot on which the wink is to be transmitted must be set to signaling insertion.

Use **dt_setidle()** to idle a time slot.

The programming example below represents a typical initialization routine for a single time slot on a single board in a T1 environment.

```
int init( )
{
    int dti1;
    /* open time slot 1 on D/240SC-T1 board 1 ("dti1") */
    .
    .
    .
    /* Set time slot "onhook" */
    if ( dt_onhook ( dti1 ) !=0 ) {
        do_error( dti1, "dt_onhook( ) " );
        exit( 1 );
    }
    /* Reset all signaling event masks */
    if ( dt_setevtmsk( dti1, DTG_SIGEVT, 0, DTA_SETMSK ) !=0 ) {
        do_error( dti1, "dt_setevtmsk()" );
        exit ( 1 );
    }
}
int dt_onhook ( devh)
{
    int devh;
    {
        int retval;
```

Dialogic® Digital Network Interface Software Reference

```
/*
 * Transmit AOFF and BOFF
 */
if ( ( retval = dt_settssig( devh, DTB_ABIT | DTB_BBIT,
    DTA_SUBMSK ) ) != 0 ) {
    do_error( devh, "dt_settssig()" );
    return ( retval );
}
/*
 * Set signaling mode to signaling insertion
 */
if ( ( retval = dt_setsigmod( devh, DTM_SIGINS ) ) != 0 ) {
    do_error( devh, "dt_setsigmod()" );
    return ( retval );
}
/*
 * Enable idle transmission
 */
if ( ( retval = dt_setidle( devh, DTIS_ENABLE ) ) != 0 ) {
    do_error( devh, "dt_setidle()" );
}
return ( retval );
}
```

The **dt_setevtmsk()** function disables generation of signaling events (see *Appendix A – Dialogic® Standard Runtime Library* or *Chapter 5. Function Reference* for details).

The **dt_onhook()** routine is a user-defined function that forces the selected time slot to the on-hook, idle state using three separate library functions.

The **dt_setsigmod()** function sets the time slot to signaling insertion mode. (This enables the device to transmit idle on the time slot without overriding signaling.)

The **dt_settssig()** function forces the time slot to the on-hook state.

NOTE: This example assumes that clearing both the A-bits and B-bits is equal to the on-hook state. Your carrier service may differ.

The **dt_setidle()** function transmits an idle pattern to the network on the selected time slot.

NOTE: When two digital network interface boards are arranged in drop-and-insert configuration, **dt_setidle()** can be used to disable pass-through operation. Transmitting idle overrides voice data being passed between network devices on the selected time slot(s).

6. Application Guidelines

6.1.3. Processing

The main processing tasks for a digital network interface application involve:

- Opening digital network interface board and time slot devices
- Establishing connections

Opening and Using Board and Time Slot Devices

Both Linux and Windows® open and close devices in the same manner that they open and close files. The operating systems view digital network interface boards and time slot devices as special files. When you open a file, a unique file descriptor is returned for that file. For example:

```
int file_descriptor;
file_descriptor = open(filename,mode);
```

Any subsequent action you perform on that file is accomplished by identifying the file using **file_descriptor**. No action at all can be performed on the file until it is first opened. Devices work in a similar fashion. You must first open a device before you can perform an operation with it. When you open a device, the value returned is a unique handle for that process:

```
int device_handle;
device_handle = dt_open(device_name,mode);
```

NOTE: A device handle is NOT the same handle returned by an **open()** system call.

The digital network interface device driver treats time slot and logical board devices similarly. Each is referred to by using a **device handle**. Any time you want to use the device, you must identify the device with its handle. A time slot device is an individual T1 or E1 time slot; for example, 1 of the 30 time slots on a Dialogic® DTI/300SC Board. A Dialogic® DTI/300SC Board is one digital network interface logical board device containing 30 time slot devices.

NOTE: Time slot devices can be opened without opening the board device containing that time slot. (It is unnecessary to open a board device unless you are setting or getting a board-level device parameter or alarm handling.)

Dialogic® Digital Network Interface Software Reference

Follow the guidelines below when defining devices in the configuration file:

Valid device names for DTI devices are found in the /dev directory. For the Dialogic® DTI/xxx Boards, the device name format is dtiBx or dtiBxTy, where:

- *x* represents the digital network interface logical board number
- *y* represents the time slot number, ranging from 1 to 24 (T1) or 1 to 30 (E1)

Valid device names for the Dialogic® D/xxxSC Boards are built from the board name specified in the configuration file. The name of the D/xxxSC device may be in the form dtiBx, dtiBx, dtiBxTy, or dtiBxTy where:

- *x* represents the D/xxxSC logical board number
- *y* represents the time slot number, ranging from 1 to 24 (T1) or 1 to 30 (E1)

NOTE: The logical board device number of the D/xxxSC device must not be the same as the logical board number of the DTI/xxx device.

The following example shows how time slot 1 can be opened on two different Dialogic® D/240SC-T1 Boards. For details on opening and closing devices, refer to **dt_open()** in *Chapter 5. Function Reference*.

```
int dti1;
int dti2;

/* Open device dtiB1T1 */
if ( ( dti1 = dt_open( "dtiB1T1", 0 ) ) == -1 ) {
    printf( "Cannot open DTI device dtiB1T1\n" );
    perror( " " );
    exit ( 1 );
}

/* Open device dtiB2T1 */
if ( ( dti2 = dt_open( "dtiB2T1", 0 ) ) == -1 ) {
    printf( "Cannot open DTI device dtiB2T1\n" );
    perror( " " );
    exit ( 1 );
}
```

NOTE: To avoid redundancy in the remaining programming examples in this chapter, the **dt_open()** function will not be shown. The remaining examples are based on the device name conventions used in the examples above and assume that the relevant digital network interface devices have previously been opened.

6. Application Guidelines

Establishing Connections

The examples below show how an incoming call can be established.

```
#include <windows.h>           /* For Windows applications only */
#include <srllib.h>
#include <dtlib.h>
#include <errno.h>

int devh;                      /* Time slot device handle */
int retval;                     /* Function return value */
int AON_received = 0;           /* AON_received flag */
int AON_handler( )
{
    int event = sr_getevtttype( );
    int *datap = (int *)sr_getevtdatap( );
    short indx;
    if (event != DTEV_SIG) {
        printf("Unknown event %d received. Data = %d\n",event,*datap);
        return 0;
    }
    for (indx = 0; indx < 4; indx++) {
        /*
         * Check if bit in change mask (upper nibble - lower byte) is
         * set or if this is a WINK (upper nibble - upper byte) event
         */
        if (!(*datap & (0x1010 << indx))) {
            continue;
        }
        switch (*datap & (0x1111 << indx)) {
        case DTMM_AON:
            AON_received = 1;
            break;
            .
            .
            .
        default:
            printf(Signal Event Error: Data = %d\n,*datap);
        }
    }
    return 0;
}
int wait_ring()
{
/*
 * This routine waits for an event from AON_handler to signal
 * an incoming call
*/
}

int devh;          /* Time slot device handle */

/*
 * Open board 1 time slot 1 device (dtl)
 */
if ( ( devh = dti_open( "dtiB1T1", 0 ) ) == -1 ) {
    printf( "Cannot open device dtiB1T1. errno = %d", errno );
    return ( -1 );
}
```

Dialogic® Digital Network Interface Software Reference

```
/*
 * Enable event handler to catch AON events
 */
if ( ( retval = sr_enbhdlr( devh, DTEV_SIG, AON_handler ) ) == -1 ) {
    printf( "Unable to set AON handler for device %s",
            ATDV_NAMEP( devh ) );
    return( retval );
}
/*
 * Enable AON signaling transition events
 */
if ( ( retval = dt_setevtmsk( devh, DTG_SIGEV, DTMM_AON,
                             DTA_SETMSK ) ) == -1 ) {
    printf( "Error message = %s.", ATDV_ERRMSGP( devh ) );
    return( retval );
}
/*
 * Now wait for an incoming call
 */
while( AON_received == 0 ) {
    sleep( -1 ); /* Sleep until we receive an incoming call */
}
/* We have received an incoming call. See next segment. */
.
.
.
```

The **AON_handler()** routine is an asynchronous event handler that flags transitions of signaling bit “A” to the ON state. When the system detects an A-ON condition, **AON_handler()** sets the **AON_received** flag to 1. The **AON_handler()** function uses the SRL **sr_enbhdlr()** function and related event management functions to determine when a signaling transition occurs. For details, see *Appendix A – Dialogic® Standard Runtime Library*.

- NOTES:**
- 1.** Asynchronous signal handling is one of several ways to manage event notification and is shown for ease of explanation only. For more information on application development models, refer to the *Dialogic® Standard Runtime Library API Programming Guide*.
 - 2.** This example assumes that setting the A-bit to ON is equal to the off-hook state. Your carrier service may differ.

The **wait_ring()** routine is a user-defined function that performs the following tasks:

- Opens a time slot device.
- Enables trapping of the desired signaling condition for the selected time slot device.
- Puts the application to sleep until detection of the appropriate signaling condition.

6. Application Guidelines

The **dt_open()** function opens time slot 1 on digital network interface board 1 and assigns the returned device handle to variable **devh**.

The SRL **sr_enbhdlr()** function enables processing by the **AON_handler** function of any signaling events detected on the device represented by **devh** (for details see *Appendix A – Dialogic® Standard Runtime Library*).

The **dt_setevtmsk()** function enables detection of signaling bit A-ON transitions on device **devh**. Using E&M (Ear and Mouth) signaling protocol, a transition of the A-bit from OFF to ON signifies a request for service or ring event. When enabling event notification, the **dt_setevtmsk()** function should be invoked only after the applicable handler has been enabled; otherwise, events could be missed. In the previous example, the **AON_handler()** function was used.

The **while** statement puts the routine to sleep until the **AON_handler** routine detects a ring event. When a ring event is detected, processing resumes with the following segment.

```
/*
 * Continued from previous example
 */
.

int dt_offhook ( devh )
int devh;
{
    int retval;
    /*
     * Transmit AON and BON
     */
    if ( ( retval = dt_settssig( devh, DTB_ABIT | DTB_BBIT,
        DTA_ADDMSK ) ) != 0 ) {
        do_error( devh, "dt_settssig()" );
        return ( retval );
    }
    /*
     * Set signaling mode to signaling insertion
     */
    if ( ( retval = dt_setsigmod( devh, DTM_SIGINS ) ) != 0 ) {
        do_error( devh, "dt_setsigmod()" );
        return ( retval );
    }
    /*
     * Disable idle transmission
     */
    if ( ( retval = dt_setidle( devh, DTIS_DISABLE ) ) != 0 ) {
        do_error( devh, "dt_setidle()" );
    }
    return ( retval );
}
```

Dialogic® Digital Network Interface Software Reference

The **dt_offhook()** routine is a user-defined function that forces the selected time slot to the off-hook state and disables the transmission of idle using three separate library functions.

NOTE: The **dt_offhook()** function is similar to the **dt_onhook()** function explained above, under *Initialize Time Slots*, in the **init()** example.

The **dt_setsigmod()** function sets the time slot to signaling insertion mode.

NOTE: Setting signaling to insertion mode is necessary if your application will be generating signaling from the digital network interface board. To generate signaling from a voice or other resource channel, set the signaling mode to transparent.

The **dt_setssig()** function forces the time slot to the off-hook state.

NOTE: This example assumes that setting the A-bits and B-bits is equal to the off-hook state. Your carrier service may differ.

The **dt_setidle()** function disables the transmission of the idle pattern to the network on the selected time slot.

6.1.4. Terminating

When your process completes, devices should be shut down in an orderly fashion. Tasks that are performed to terminate an application generally include:

- Disable events
- Reset time slots
- Close devices

The example that follows is based in part on the processes illustrated in the previous examples. When your application is done processing a call, the following example should be executed.

NOTE: The following example assumes that relevant devices have been previously opened and variable names have been declared.

6. Application Guidelines

```
/* Disable all signaling events for this time slot */
if ( dt_setevtmsk( dt1, DTG SIGEV, 0, DTA SETMSK ) != 0 ) {
    do_error( dt1, "dt_setevtmsk()" ); /* Error function */
}

/*
 * Disable event handler for AON events
 */
if ( ( retval = sr_dishdlr( devh, DTEV SIG, AON_handler ) ) == -1 ) {
    printf( "Unable to disable AON handler for device %s",
            ATDV_NAMEP( devh ) );
    return( retval );
}

/*
 * close time slot 1 on digital network interface board 1 ("dti1") and digital network
 * interface board2 ("dti2")
 */
if ( dt_close( dti1 ) != 0 ) {
    do_error( dti1, "dt_close()" );
}
if ( dt_close( dti2 ) != 0 ) {
    do_error( dti2, "dt_close()" );
}
```

The **dt_setevtmsk()** function disables all currently enabled event notification masks. The routine that follows uses SRL functions (not illustrated) to disable all signal handlers (for SRL details, see *Appendix A – Dialogic® Standard Runtime Library*).

- NOTES:**
1. The **dt_setevtmsk()** and any SRL functions must be called in the order shown in the example.
 2. SRL Event Management functions (such as **sr_dishdlr()**, which disables an event handler) must be called prior to closing the device that is sending the handler event notifications (see *Appendix A – Dialogic® Standard Runtime Library* for SRL details).

The **dt_onhook()** routine is a user-defined function that forces the selected time slot back to the on-hook, idle state using three separate library functions.

NOTE: The **dt_onhook()** function is identical to the one explained above, under *Initialize Time Slots*, in the **init()** example segment.

The **dt_setsigmod()** function resets the time slot device to signaling insertion mode.

The **dt_settssig()** function sets the time slot device to the on-hook state, ready for another call.

Dialogic® Digital Network Interface Software Reference

The **dt_setidle()** function transmits idle on the selected time slot. When two digital network interface boards are arranged in drop-and-insert configuration, **dt_setidle()** can be used to disable pass-through operation. Transmitting idle overrides voice data being passed between network devices on the selected time slot(s).

The **dt_close()** function closes the time slot device.

6.1.5. Compiling and Linking

To compile and link your application, follow the syntax instructions for your version of the C Development Package.

NOTE: Make sure when compiling or linking that the SRL library name is specified last. If your application includes Dialogic® Digital Network Interface and Voice Library functions, for instance, use either of the following two library orders on the command line:

`-l dti -l dxxx -l srl`

or

`-l dxxx -l dti -l srl`

6.1.6. Aborting

If you abort a digital network interface application by pressing the interrupt key, the system will terminate the current process but may leave devices in an unknown state. The next time you run your application, therefore, you may encounter errors.

To avoid errors of this type, your application should include an event handler that traps the interrupt key and performs the actions discussed under *Section 6.1.4. Terminating*.

6.2. Adding Advanced Features

When designing an application, you must test for digital network interface alarm, signaling, and other unsolicited or asynchronous events by constructing one or more **event handlers**. An event handler is an application-defined function that is called by the Dialogic® Standard Runtime Library (SRL).

6. Application Guidelines

NOTE: Event handling operations vary with the mode type (i.e., callback, polled, synchronous, etc.) used by your application. For more information on application development models, refer to the *Dialogic® Standard Runtime Library API Programming Guide*.

Warning

To avoid re-entrance problems, construction of an event handler must follow the same rules as a signal handler. Consult your system administrator or documentation for detailed information.

Calls to the appropriate event handler are managed by the SRL. Within a digital network interface application, event notification may be enabled, disabled, held, and released by a combination of SRL and Digital Network Interface Library functions. For more information, refer to *Appendix A – Dialogic® Standard Runtime Library*.

Dialogic® Digital Network Interface Software Reference

7. Dialogic® Digital Network Interface API for Dialogic® DM3 Boards

This chapter describes the Dialogic® Digital Network Interface API support on Dialogic® DM3 Boards and notes any differences in the way the API is used on Dialogic® Springware Boards versus Dialogic® DM3 Boards.

7.1. Digital Network Interface API Function Restrictions

The Dialogic® Digital Network Interface Library contains functions for controlling the digital network interface (E1 or T1) to the Public Switched Telephone Network (PSTN). The Digital Network Interface Library includes functions for alarm handling, diagnostics, resource management, SCbus routing and others.

On Dialogic® DM3 Boards, most Digital Network Interface functions are not supported since the same functionality can be achieved using the Dialogic® Global Call API. However, the resource management and TDM bus routing functions are supported as shown in *Table 8*. Dialogic® DM3 Boards can use the DTI API for Layer 1 alarms (see *Section 7.2. Detecting Layer 1 Alarms*). All other DTI functions are not supported.

NOTE: If you execute a function that is not supported on Dialogic® DM3 Boards, it produces an EDT_NOTIMP (“not implemented”) error.

Table 8. List of Dialogic® Digital Network Interface API Functions Supported on Dialogic® DM3 boards

Function Name	Notes
dt_close()	Supported. Although dt_open() and dt_close() are supported on Dialogic® DM3 network interface devices, use of the network interface device handle is extremely limited because the Global Call API provides application call control rather than the DTI API. In general, use the gc_OpenEx() , gc_GetNetworkH() , and gc_Close() functions instead.
dt_getctinfo()	Supported
dt_getxmitslot()	Supported
dt_listen()	Supported
dt_open()	Supported. See note for dt_close() .
dt_setevtmsk()	Limitations: Supports enabling layer 1 alarms.
dt_unlisten()	Supported
dt_xmitalarm()	Supported

7.2. Detecting Layer 1 Alarms

On Dialogic® DM3 Boards, the Dialogic® Digital Network Interface API allows applications to retrieve alarm information that can be used to troubleshoot problems on line devices. The API provides the **dt_setevtmsk()** function to enable an application to configure which alarms are to be received.

The **dt_setevtmsk()** function enables and disables notification for events that occur on a digital network interface logical board or time slot device. This function allows the application to set a bitmask of transition events. The bitmask determines which transitions cause an event to be generated.

When using this function, check for **DTEV_E1ERRC** or **DTEV_T1ERRC** for E1 or T1 events, respectively.

7. Dialogic® Digital Network Interface API for Dialogic® DM3 Boards

NOTE: Since **dt_getevtmsk()** is not supported, the application must keep track of the bitmask of events previously set with the **dt_setevtmsk()** function.

Dialogic® Digital Network Interface Software Reference

Appendix A – Dialogic® Standard Runtime Library

Digital Network Interface Entries and Returns

The Dialogic® Standard Runtime Library (SRL) is a device independent library containing Event Management functions, Standard Attribute functions, and the DV_TPT Termination Parameter table. SRL functions and data structures are described in detail in the *Dialogic® Standard Runtime Library API Library Reference*. This appendix lists all SRL entries and returns applicable to the Dialogic® Digital Network Interface API. *Table 9* provides a guide to the contents of this appendix.

Table 9. Guide to Appendix A

SRL Components	Digital Network Interface Data	Table Number
Event Management functions	Digital Network Interface inputs for Event Management functions	<i>Table 10</i>
	Digital Network Interface returns from Event Management functions	<i>Table 11</i>
Standard Attribute functions	Digital Network Interface values returned by the Standard Attribute functions	<i>Table 12</i>
DV_TPT Table	Termination conditions and related data, required to set the DV_TPT for a Digital Network Interface device	<i>Table 13</i>

NOTE: The header file for this library is *srlib.h*. It must be “included” in application code prior to including *dtilib.h*. For example:

```
#include <srlib.h>
#include <dtilib.h>
```

Event Management Functions

The Event Management functions enable processing of unsolicited and asynchronous termination events returned by library functions. For the Dialogic® Digital Network Interface API, these functions include:

dt_rundiag()
dt_setevtmsk()
dt_tstcom()
dt_tstdat()
dt_xmitwink()

The Event Management functions applicable to the Digital Network Interface API are listed in the following tables. *Table 10* shows digital network interface-specific inputs and *Table 11* shows valid digital network interface returns.

Table 10. Digital Network Interface Inputs for Event Management Functions

Event Management Function	Digital Network Interface-Specific Input	Valid Input Value
sr_enbhdlr() <i>Enable event handler</i>	evt_type	DTEV_T1ERRC - T1 alarm condition detected
		DTEV_E1ERRC - E1 alarm condition detected
		DTEV_SIG - Signaling transition event detected
		DTEV_COMRSP - Successful communications test
		DTEV_DATRSP - Response to data test
		DTEV_RETDIAG - Diagnostic complete
		DTEV_WINKCPLT - Wink transmission complete
		DTEV_RCVPDG - Receive pulse digits
		DTEV_PDDONE - Pulse dial complete events
		DTEV_ERREVT - Error condition event
		DTEV_MTFCNCPT - Multitasking function complete
sr_dishdlr() <i>Disable event handler</i>	evt_type	Same as above
sr_getevtdev() <i>Get device handle</i>	device	digital network interface device handle

Dialogic® Digital Network Interface Software Reference

Event Management Function	Digital Network Interface-Specific Input	Valid Input Value
sr_getevtype() <i>Get event type</i>	event type	DTEV_T1ERRC
		DTEV_E1ERRC
		DTEV_SIG
		DTEV_COMRSP
		DTEV_DATRSP
		DTEV_RETDIAG
		DTEV_WINKCPLT
		DTEV_RCVPDG
		DTEV_PDDONE
		DTEV_ERREVT
		DTEV_MTFCNCPT
sr_getevlen() <i>Get event data length</i>	event length	Number of bytes in the data returned
sr_getevtdatap() <i>Get pointer to event data</i>	event data	Pointer to event specific data

Table 11. Digital Network Interface Returns from Event Management Functions

Event Management Function	Digital Network Interface-Specific Return	Returned Value
sr_getevtdev() <i>Get device handle</i>	device	digital network interface device handle
sr_getevtype() <i>Get event type</i>	event type	DTEV_T1ERRC
		DTEV_E1ERRC
		DTEV_SIG
		DTEV_COMRSP
		DTEV_DATRSP
		DTEV_RETDIAG
		DTEV_WINKCPLT
		DTEV_RCVPDG
		DTEV_PDDONE
		DTEV_ERREVT
		DTEV_MTFCNCPT
sr_getevlen() <i>Get event data length</i>	event length	digital network interface event length information
sr_getevtdatap() <i>Get pointer to event data</i>	event data	digital network interface event data pointer information

Standard Attribute Functions

The Standard Attribute functions return general device information, such as the device name or the last error that occurred on the device. The Standard Attribute functions and the digital network interface-specific information they return are listed in *Table 12*.

Table 12. Standard Attribute Functions

Standard Attribute Function	Information Returned for Digital Network Interface
ATDV_ERRMSGP()	Pointer to string describing the error that occurred during the last function call on the digital network interface (see the error listing section and function reference section of the appropriate software reference)
ATDV_IOPORT()	Valid port address for the digital network interface
ATDV_IRQNUM()	Valid IRQ number range
ATDV_LASTERR()	The error that occurred during the last function call on the digital network interface (see the error listing section and function reference section of the appropriate software reference)
ATDV_NAMEP()	Pointer to device name (dtiBbXx)
ATDV_SUBDEVS()	Number of subdevices (time slots, channels, etc.). List digital network interface-specific returns. Refer to the <i>Dialogic® Standard Runtime Library API Programming Guide</i> for information on subdevices.

TPT Structure

The DV_TPT termination parameter table sets termination conditions for a range of products. The valid values for the DV_TPT structure in relation to the digital network interface board are contained in this section.

The DV_TPT structure has the following format:

```
typedef struct dv_tpt {
    unsigned short tp_type;           /* Flags describing this entry */
    unsigned short tp_termno;         /* Termination Parameter number */
    unsigned short tp_length;          /* Length of terminator */
    unsigned short tp_flags;           /* Parameter attribute flag */
    unsigned short tp_data;            /* Optional additional data */
    unsigned short rfu;                /* Reserved */
    DV_TPT      *tp_nexttp;           /* Pointer to next termination
                                         * parameter if IO_LINK set
                                         */
} DV_TPT;
```

Table 13 shows the digital network interface equates for this structure.

Table 13. DV_TPT Structure

Field	Value	Description
tp_type	IO_LINK	Structure is part of a linked list - the structure is linked through the Dialogic® Standard Runtime Library
	IO_CONT (default)	The next structure will be contiguous in memory
	IO_EOT	This structure is the final entry in the DV_TPT table
rfu	0	Reserved for future use
tp_nexttp	0	Pointer to the next termination parameter

Refer to the *Dialogic® Voice API Library Reference* for further information on the termination parameter table structure.

Dialogic® Digital Network Interface Software Reference

Appendix B - Message Blocks

Command Message Blocks

DTCAS_CLEAR_ALL_TEMPLATE

This command clears all templates for a particular channel. The **devh** handle must be a valid DTI channel device handle. The reply message code, DTCAS_CLEAR_ALL_TEMPLATE_COMPLETE, is received in response to this command.


The typedef for the DTCAS_CLEAR_ALL_TEMPLATE structure is as follows:

```
typedef struct t_clear_all_template_msg
{
    unsigned char msg_code;
    unsigned char rfu;
    unsigned short template_id;
} DTCAS_CLEAR_ALL_TEMPLATE_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_CLEAR_ALL_TEMPLATE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier


DTCAS_CREATE_TRANSITION

This command adds a transition template to the signal set. The following figures illustrate the timing definitions for a transition template.

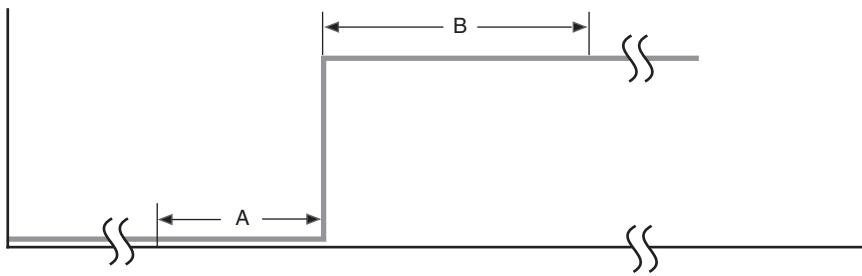

A = PreTransInterval
B = PostTransInterval

Figure 13. Transition Timing, Receive

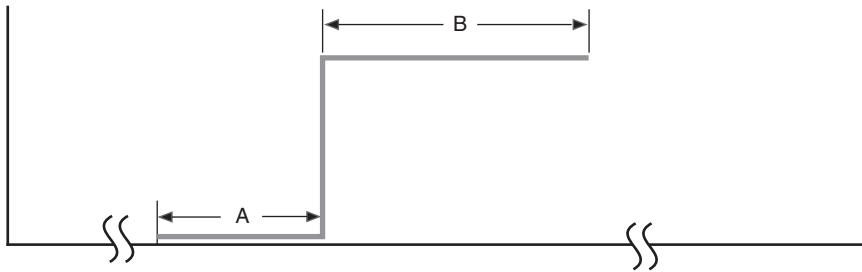

A = PreTransIntervalNom
B = PostTransIntervalNom

Figure 14. Transition Timing, Transmit

The signal is not immediately active for detection. The **devh** handle must be a valid DTI board device handle. The **cmdmsgp** argument must point to the **DTCAS_CREATE_TRANSITION_MSG** message block. The reply message code, **DTCAS_CREATE_TRANSITION_COMPLETE**, is received in response to this command message block. The typedef for the **DTCAS_CREATE_TRANSITION_MSG** structure is as follows:

Appendix B – Message Blocks


```
typedef struct t_create_transition_msg {
    unsigned char    msg_code;
    unsigned char    flags;
    unsigned short   template_id;
    unsigned char    PreTransCode;
    unsigned char    PostTransCode;
    unsigned short   PreTransInterval;
    unsigned short   PreTransIntervalNom; /* [ci]+ send template addition */
    unsigned short   PostTransInterval;
    unsigned short   PostTransIntervalNom;
} DTCAS_CREATE_TRANSITION_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_CREATE_TRANSITION
flags	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
PreTransCode	specifies the pattern to be matched/set prior to transition. See common data type <i>prefixCode</i> for the format of this field.
PostTransCode	specifies the pattern to be matched/set after transition. See common data type <i>prefixCode</i> for the format of this field.
PreTransInterval	specifies the minimum time for the duration of the pre-transition interval; i.e., the amount of time during which the PreTransCode must be present on the channel before it begins to look for the transition to the PostTransCode. See common data type <i>prefixInterval</i> for the format of this field.
PreTransIntervalNom	specifies the duration of the pre-transition interval for transmission; i.e., the length of time to transmit the PreTransCode. The PreTransCode must be transmitted for the PreTransIntervalTime via the dt_settssigsim() function. See common data type <i>prefixInterval</i> for the format of this field.

Parameter	Description
PostTransInterval	specifies the minimum time for the duration of the post-transition interval; i.e., the amount of time during which the PostTransCode must be present on the channel after the PreTransCode has been detected for the PreTransInterval time. See common data type <i>prefixInterval</i> for the format of this field.
PostTransIntervalNom	specifies the duration of the post-transition interval for transmission; i.e., the length of time to transmit the PostTransCode. See common data type <i>prefixInterval</i> for the format of this field.


DTCAS_CREATE_PULSE

This command adds a pulse template to the signal set. The following figures illustrate the timing definitions for a pulse template.

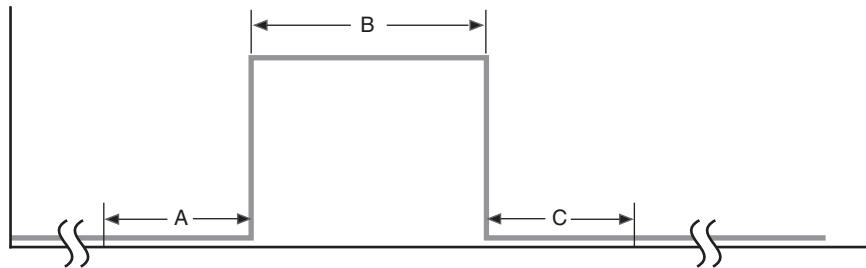

A = PrePulseInterval
PulseIntervalMin < B < PulseIntervalMax
C = PostPulseInterval

Figure 15. Pulse Timing, Receive

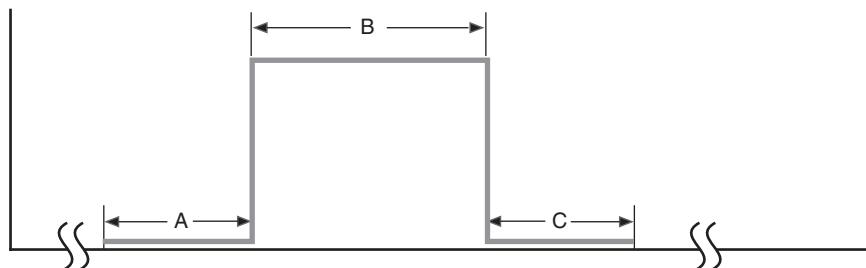

A = PrePulseIntervalNom
B = PulseIntervalNom
C = PostPulseIntervalNom

Figure 16. Pulse Timing, Transmit

The signal is not immediately active for detection. The **devh** handle must be a valid DTI board device handle. The **cmdmsgp** argument must point to the **DTCAS_CREATE_PULSE_MSG** message block. The reply message code,

DTCAS_CREATE_PULSE_COMPLETE, is received in response to this command. The typedef for the DTCAS_CREATE_PULSE_MSG structure is:


```
typedef struct t_create_pulse_msg {
    unsigned char     msg_code;
    unsigned char     flags;
    unsigned short   template_id;
    unsigned char     OffPulseCode;
    unsigned char     OnPulseCode;
    unsigned short   PrePulseInterval;
    unsigned short   PrePulseIntervalNom;
    unsigned short   PulseIntervalMin;
    unsigned short   PulseIntervalNom;
    unsigned short   PulseIntervalMax;
    unsigned short   PostPulseInterval;
    unsigned short   PostPulseIntervalNom;
} DTCAS_CREATE_PULSE_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_CREATE_PULSE
flags	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
OffPulseCode	specifies the pattern to be matched/set prior to pulse and after pulse. See common data type prefixCode for the format of this field.
OnPulseCode	specifies the pattern to be matched/set during pulse. See common data type prefixCode for the format of this field.
PrePulseInterval	specifies the minimum time for the duration of the pre-pulse interval; i.e., the amount of time during which the OffPulseCode must be present on the channel before it begins to look for the transition to the OnPulseCode. See common data type prefixInterval for the format of this field.
PrePulseIntervalNom	specifies the duration of the pre-pulse interval for transmission; i.e., the amount of time to transmit the OffPulseCode prior to transmitting the OnPulseCode. The OffPulseCode must be transmitted for at least PrePulseIntervalTimeNom via the dt_settssigsim() function. See common data type prefixInterval for the format of this field.

Parameter	Description
PulseIntervalMin	specifies the minimum time for the duration of the pulse interval; i.e., the minimum amount of time during which the OnPulseCode must be present on the channel before it transitions to the OffPulseCode. See common data type <i>prefixInterval</i> for the format of this field.
PulseIntervalMax	specifies the maximum time for the duration of the pulse interval; i.e., the maximum amount of time during which the OnPulseCode can be present on the channel before it transitions to the OffPulseCode. See common data type <i>prefixInterval</i> for the format of this field.
PulseIntervalNom	specifies the desired time for the duration of the pulse interval; i.e., the amount of time to transmit the OnPulseCode prior to transmitting the OffPulseCode. See common data type <i>prefixInterval</i> for the format of this field.
PostPulseInterval	specifies the minimum time for the duration of the end-of-pulse interval; i.e., the minimum amount of time during which the OffPulseCode must be present on the channel after OnPulseCode is detected for a minimum of PulseIntervalMin and a maximum of PulseIntervalMax. See common data type <i>prefixInterval</i> for the format of this field.
PostPulseIntervalNom	specifies the duration of the end-of-pulse interval for transmission; i.e., the amount of time to transmit the OffPulseCode after transmitting the OnPulseCode for PulseIntervalTime. See common data type <i>prefixInterval</i> for the format of this field.

DTCAS_CREATE_TRAIN

This command adds a pulse train template to the signal set. The following figures illustrate the timing definitions for a pulse train template.

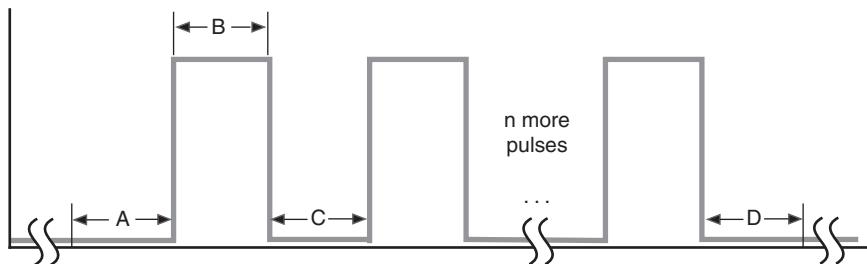


A = PreTrainInterval

PulseIntervalMin < B < PulseIntervalMax

InterPulseIntervalMin < C < InterPulseIntervalMax

D = PostTrainInterval

Figure 17. Pulse Train Timing, Receive

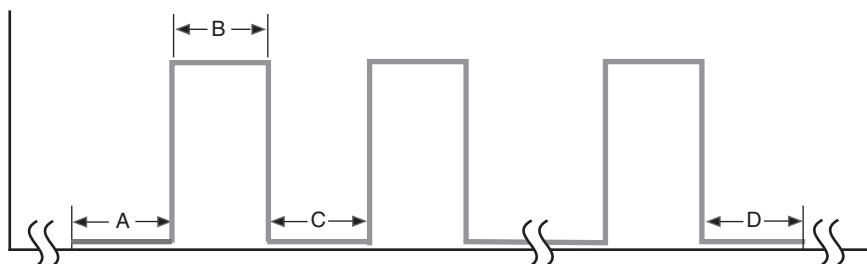

A = PreTrainIntervalNom

B = PulseIntervalNom

C = InterPulseIntervalNom

D = PostTrainIntervalNom

Figure 18. Pulse Train Timing, Transmit

The signal is not immediately active for detection. The **devh** handle must be a valid DTI board device handle. The **cmdmsgp** argument must point to the **DTCAS_CREATE_TRAIN_MSG** message block. The reply message code, **DTCAS_CREATE_TRAIN_COMPLETE**, is received in response to this command. The typedef for the **DTCAS_CREATE_TRAIN_MSG** structure is as follows:

```
typedef struct t_create_train_msg {
    unsigned char    msg_code;
    unsigned char    flags;
    unsigned short   template_id;
    unsigned char    OffPulseCode;
    unsigned char    OnPulseCode;
    unsigned short   PreTrainInterval;
    unsigned short   PreTrainIntervalNom;
    unsigned short   PulseIntervalMin;
    unsigned short   PulseIntervalNom;
    unsigned short   PulseIntervalMax;
    unsigned short   InterPulseIntervalMin;
    unsigned short   InterPulseIntervalNom;
    unsigned short   InterPulseIntervalMax;
    unsigned short   PostTrainInterval;
    unsigned short   PostTrainIntervalNom;
} DTCAS_CREATE_TRAIN_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_CREATE_TRAIN
flags	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
OffPulseCode	specifies the pattern to be matched/set prior to pulse and after pulse. See common data type prefixCode for the format of this field.
OnPulseCode	specifies the pattern to be matched/set during pulse. See common data type prefixCode for the format of this field.

Parameter	Description
PulseIntervalMin	specifies the minimum time for the duration of the pulse interval; i.e., the minimum amount of time during which the OnPulseCode must be present on the channel before it transitions to the OffPulseCode. This field should not be set to zero. See common data type prefixInterval for the format of this field.
PulseIntervalMax	specifies the maximum time for the duration of the pulse interval; i.e., the maximum amount of time during which the OnPulseCode can be present on the channel before it transitions to the OffPulseCode. This parameter should be set to a value that is greater than the PulseIntervalNom parameter. See common data type prefixInterval for the format of this field.
PulseIntervalNom	specifies the desired time for the duration of the pulse interval; i.e., the amount of time to transmit the OnPulseCode prior to transmitting the OffPulseCode. This parameter should be set to a value greater than the PulseIntervalMin parameter. See common data type prefixInterval for the format of this field.
PreTrainInterval	specifies the minimum time for the duration of the pre-train interval; i.e., the amount of time during which the OffPulseCode must be present on the channel before it begins to look for the first transition to the OnPulseCode. This time may differ from the pre-pulse time of the component pulses. See common data type prefixInterval for the format of this field.

Parameter	Description
PreTrainIntervalNom	specifies the duration of the pre-train interval for transmission; i.e., the amount of time to transmit the OffPulseCode prior to transmitting the first OnPulseCode. The OffPulseCode must be transmitted via the dt_settssigsim() function for at least the PreTrainIntervalTime. See common data type prefixInterval for the format of this field.
InterPulseIntervalMin	specifies the minimum time for the duration of the inter-pulse interval; i.e., the minimum amount of time during which the OffPulseCode must be present on the channel after having received OnPulseCode for at least PulseIntervalMin and no longer than PulseIntervalMax. See common data type prefixInterval for the format of this field.
InterPulseIntervalMax	specifies the maximum time for the duration of the inter-pulse interval; i.e., the maximum amount of time during which the OffPulseCode can be present on the channel after having received OnPulseCode for at least PulseIntervalMin and no longer than PulseIntervalMax. See common data type prefixInterval for the format of this field.
InterPulseIntervalNom	specifies the desired time for the duration of the inter-pulse interval; i.e., the amount of time to transmit the OffPulseCode after transmission of the OnPulseCode for PulseIntervalNom. See common data type prefixInterval for the format of this field.

Parameter	Description
PostTrainInterval	specifies the minimum time for the duration of the end-of-train interval; i.e., the minimum amount of time during which the OffPulseCode must be present on the channel after the last OnPulseCode is detected for a minimum of PulseIntervalMin and a maximum of PulseIntervalMax. See common data type prefixInterval for the format of this field.
PostTrainIntervalNom	specifies the minimum time for the duration of the end-of-train interval; i.e., the amount of time to transmit the OffPulseCode after transmitting the last OnPulseCode for PulseIntervalTime. See common data type prefixInterval for the format of this field.

DTCAS_DELETE_TEMPLATE

This command removes a signal template definition from the signal set. The **devh** handle must be a valid DTI board device handle. The **cmdmsgp** argument must point to the **DTCAS_DELETE_TEMPLATE_MSG** message block. The reply message code, **DTCAS_DELETE_TEMPLATE_COMPLETE**, is received in response to this command. The typedef for the **DTCAS_DELETE_TEMPLATE_MSG** structure is as follows:

```
typedef struct t_delete_template_msg {  
    unsigned char    msg_code;  
    unsigned char    rfu;  
    unsigned short   template_id;  
} DTCAS_DELETE_TEMPLATE_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_DELETE_TEMPLATE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier

DTCAS_ENABLE_TEMPLATE

This command enables CAS signal definition in a signal set for a particular channel. Enabling a signal that is already enabled is considered an error, because recognition of the signal could already be in progress based on earlier events. The **devh** handle must be a valid DTI channel device handle. The **cmdmsgp** argument must point to the **DTCAS_ENA_DIS_TEMPLATE_MSG** command message block. The reply message code, **DTCAS_ENABLE_TEMPLATE_COMPLETE**, is received in response to this command. The typedef for the **DTCAS_ENA_DIS_TEMPLATE_MSG** structure is as follows:

```
typedef struct t_ena_dis_template_msg {  
    unsigned char msg_code;  
    unsigned char rfu;  
    unsigned short template_id;  
} DTCAS_ENA_DIS_TEMPLATE_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_ENABLE_TEMPLATE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier

DTCAS_DISABLE_TEMPLATE

This command disables a CAS signal definition in a signal set for a particular channel. Disabling a signal that is already disabled is considered a successful operation. The **devh** handle must be a valid DTI channel device handle. The **cmdmsgp** argument must point to the **DTCAS_ENA_DIS_TEMPLATE_MSG** command. The reply message code, **DTCAS_DISABLE_TEMPLATE_COMPLETE**, is received in response to this command. The typedef for the **DTCAS_ENA_DIS_TEMPLATE_MSG** structure is as follows:

```
typedef struct t_disable_template_msg {
    unsigned char      msg_code;
    unsigned char      rfu;
    unsigned short     template_id;
} DTCAS_ENA_DIS_TEMPLATE_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_DISABLE_TEMPLATE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier

DTCAS_GET_TEMPLATE

This command gets the template for a particular channel. The **devh** handle must be a valid DTI channel device handle. The reply message code, DTCAS_GET_TEMPLATE_COMPLETE, is received in response to this command.

The typedef for the DTCAS_GET_TEMPLATE structure is as follows:

```
typedef struct t_get_template_msg {  
    unsigned char    msg_code;  
    unsigned char    rfu;  
    unsigned short   template_id;  
} DTCAS_GET_TEMPLATE_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_GET_TEMPLATE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier

DTCAS_GET_NEXT_TEMPLATE

This command gets the template for a particular channel. The **devh** handle must be a valid DTI channel device handle. The reply message code, DTCAS_GET_NEXT_TEMPLATE_COMPLETE, is received in response to this command.

The typedef for the DTCAS_GET_NEXT_TEMPLATE structure is as follows:

```
typedef struct t_get_next_template_msg {  
    unsigned char    msg_code;  
    unsigned char    rfu;  
    unsigned short   template_id;  
} DTCAS_GET_NEXT_TEMPLATE_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_GET_NEXT_TEMPLATE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier

DTCAS_TRANSMIT_TEMPLATE

This command transmits a CAS signal in a signal set for a particular channel. The **devh** handle must be a valid DTI channel device handle. The **cmdmsgp** argument must point to the **DTCAS_TRANSMIT_MSG** command. The reply message code, **DTCAS_TRANSMIT_TEMPLATE_COMPLETE**, is received in response to this command. The typedef for the **DTCAS_TRANSMIT_MSG** structure is as follows:

```
typedef struct t_transmit_msg
{
    unsigned char msg_code;
    unsigned char rfu;
    unsigned short template_id;
    unsigned char pulse_count;
    unsigned char sequence_count;
} DTCAS_TRANSMIT_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_TRANSMIT_TEMPLATE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
pulse_count	specifies the number of pulses to send in a pulse-train. This field must be set to 1 when sending a signal transition or a pulse.
sequence_count	reserved for future use; must be set to 0

Reply Message Blocks

DTCAS_CLEAR_ALL_TEMPLATE_COMPLETE

This reply message is sent in response to a DTCAS_CLEAR_ALL_TEMPLATE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesgp** argument will contain a valid DTCAS_REPLY_MSG message block if **dt_castmgmt()** completes successfully.

The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {
    unsigned char    msg_code;
    unsigned char    rfu;
    unsigned short   template_id;
    unsigned short   result;
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_CLEAR_ALL_TEMPLATE_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_TEMPLATE_NOT_DEFINED - The template was not found in the template table.• DTCAS_ERR_TEMPLATE_TABLE_EMPTY - The template table is empty; no templates are defined.

DTCAS_CREATE_TRANSITION_COMPLETE

This reply message is sent in response to a DTCAS_CREATE_TRANSITION command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesgp** argument will contain a valid DTCAS_REPLY_MSG message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {  
    unsigned char    msg_code;  
    unsigned char    rfu;  
    unsigned short   template_id;  
    unsigned short   result;  
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type and must be set to DTCAS_CREATE_TRANSITION_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_SIGNAL_ID - Duplicate template in table.• DTCAS_ERR_SIGNAL_TABLE_FULL - The signal definition table is full.

DTCAS_CREATE_PULSE_COMPLETE

This reply message is sent in response to a DTCAS_CREATE_PULSE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesmsgp** argument will contain a valid **DTCAS_REPLY_MSG** message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {
    unsigned char    msg_code;
    unsigned char    rfu;
    unsigned short   template_id;
    unsigned short   result;
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_CREATE_PULSE_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_SIGNAL_ID - Duplicate template in table.• DTCAS_ERR_SIGNAL_TABLE_FULL - The signal definition table is full.• DTCAS_ERR_PULSE_MIN - The Pulse Min Time is 0.• DTCAS_ERR_PIMN_GTE_PINM - The Pulse Nom is less than Pulse Min.• DTCAS_ERR_PINM_GTE_PIMX - The Pulse Nom equals or exceeds Pulse Max.

DTCAS_CREATE_TRAIN_COMPLETE

This reply message is sent in response to a DTCAS_CREATE_TRAIN command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesgp** argument will contain a valid DTCAS_REPLY_MSG message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {  
    unsigned char    msg_code;  
    unsigned char    rfu;  
    unsigned short   template_id;  
    unsigned short   result;  
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_CREATE_TRAIN_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_SIGNAL_ID - Duplicate template in table.• DTCAS_ERR_SIGNAL_TABLE_FULL - The signal definition table is full.• DTCAS_ERR_PULSE_MIN - The Pulse Min Time is 0.• DTCAS_ERR_PIMN_GTE_PINM - The Pulse Nom is less than Pulse Min.• DTCAS_ERR_PINM_GTE_PIMX - The Pulse Nom equals or exceeds Pulse Max.• DTCAS_ERR_POSTINT_LTE_IPIMX - The Train Post-Interval is less than or equal to the inter pulse interval.

DTCAS_DELETE_TEMPLATE_COMPLETE

This reply message is sent in response to a DTCAS_DELETE_TEMPLATE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesmsgp** argument will contain a valid **DTCAS_REPLY_MSG** message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {
    unsigned char    msg_code;
    unsigned char    rfu;
    unsigned short   template_id;
    unsigned short   result;
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_DELETE_TEMPLATE_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_TEMPLATE_NOT_DEFINED - The template was not found in the template table.• DTCAS_ERR_TEMPLATE_TABLE_EMPTY - The template table is empty; no templates are defined.

DTCAS_ENABLE_TEMPLATE_COMPLETE

This reply message is sent in response to a DTCAS_ENABLE_TEMPLATE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesgp** argument will contain a valid DTCAS_REPLY_MSG message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {  
    unsigned char     msg_code;  
    unsigned char     rfu;  
    unsigned short   template_id;  
    unsigned short   result;  
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_ENABLE_TEMPLATE_COMPLETE.
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_TEMPLATE_NOT_DEFINED - The template was not found.

DTCAS_DISABLE_TEMPLATE_COMPLETE

This reply message is sent in response to a DTCAS_DISABLE_TEMPLATE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesmsgp** argument will contain a valid **DTCAS_REPLY_MSG** message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {
    unsigned char    msg_code;
    unsigned char    rfu;
    unsigned short   template_id;
    unsigned short   result;
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_DISABLE_TEMPLATE_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_TEMPLATE_NOT_DEFINED - The template was not found.• DTCAS_ERR_SIGNAL_NOT_ENABLED - Attempted to disable a signal pattern that wasn't enabled.

DTCAS_GET_TEMPLATE_COMPLETE

This reply message is sent in response to a DTCAS_GET_TEMPLATE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesgp** argument will contain a valid DTCAS_REPLY_MSG message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {
    unsigned char      msg_code;
    unsigned char      rfu;
    unsigned short     template_id;
    unsigned short     result;
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_GET_TEMPLATE_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_TEMPLATE_NOT_DEFINED - The template was not found in the template table.• DTCAS_ERR_TEMPLATE_TABLE_EMPTY - The template table is empty; no templates are defined.

DTCAS_GET_NEXT_TEMPLATE_COMPLETE

This reply message is sent in response to a DTCAS_GET_NEXT_TEMPLATE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesmsgp** argument will contain a valid **DTCAS_REPLY_MSG** message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {  
    unsigned char    msg_code;  
    unsigned char    rfu;  
    unsigned short   template_id;  
    unsigned short   result;  
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_GET_NEXT_TEMPLATE_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_TEMPLATE_NOT_DEFINED - The template was not found in the template table.• DTCAS_ERR_TEMPLATE_TABLE_EMPTY - The template table is empty; no templates are defined.• DTCAS_ERR_END_TMPL_TABLE – The next template was not found; no other templates are defined.

DTCAS_TRANSMIT_TEMPLATE_COMPLETE

This reply message is sent in response to a DTCAS_TRANSMIT_TEMPLATE command. The result code within the reply message block indicates the success or failure of the command. The buffer referenced by the **repliesgp** argument will contain a valid DTCAS_REPLY_MSG message block if **dt_castmgmt()** completes successfully. The typedef for the DTCAS_REPLY_MSG structure is as follows:

```
typedef struct t_create_reply_msg {
    unsigned char      msg_code;
    unsigned char      rfu;
    unsigned short     template_id;
    unsigned short     result;
} DTCAS_REPLY_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to DTCAS_TRANSMIT_TEMPLATE_COMPLETE
rfu	reserved; must be set to 0 for future compatibility
template_id	specifies the template identifier
result	indicates the success or failure of the command. This field is set to 0 on success, or to one of the following error values if the command fails: <ul style="list-style-type: none">• DTCAS_ERR_TEMPLATE_NOT_DEFINED - The template was not found.• DTCAS_ERR_TEMPLATESENDNOTDONE - Sending of a template is not finished yet.

Unsolicited Events

DTEV_CASTEVT

This event type is sent for all unsolicited CAS DTI messages sent to the application. The `sr_getevtdatap()` function must be used to return a pointer to the associated `DTCAS_DETECTED_MSG` message block. The typedef for the `DTCAS_DETECTED_MSG` structure is as follows:

```
typedef struct t_detected_msg {
    unsigned char    msg_code;
    unsigned char    flags;
    unsigned short   template_id;
    unsigned short   result;
    unsigned short   count;
    unsigned int     timestamp;
} DTCAS_DETECTED_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to NTT_CAS_TEMPLATE_MATCH
flags	reserved; must be set to 0 for future compatibility
template_id	identifies the template detected
count	identifies the number of pulses detected
timestamp	identifies the time of occurrence of this event, and is a value of the VTRX system clock. Each tick represents 1 millisecond, and the granularity of the timestamp is 10; since this is VTRX system clock, this could be used by the application as a relative time.

DTEV_CASSENDENDEVT

This event type is sent to the application after an application initiated signal pattern transmission is complete. The **sr_getevtdatap()** function must be used to return a pointer to the associated **DTCAS_END_TRANSMIT_MSG** message block. The typedef for the **DTCAS_END_TRANSMIT_MSG** structure is as follows:

```
typedef struct t_detected_msg {
    unsigned char      msg_code;
    unsigned char      rfu;
    unsigned short     template_id;
    unsigned short     pulse_count;
    unsigned short     sequence_count;
    unsigned int       timestamp;
} DTCAS_DETECTED_MSG;
```

Parameter	Description
msg_code	identifies the message type; must be set to NTT_CAS_TEMPLATE_SEND_END
rfu	reserved; must be set to 0 for future compatibility
template_id	identifies the template detected
pulse_count	identifies the number of pulses detected
sequence_count	reserved for future use; should be ignored by the application
timestamp	identifies the time of occurrence of this event, and is a value of the VTRX system clock. Each tick represents 1 millisecond, and the granularity of the timestamp is 10; since this is VTRX system clock, this could be used by the application as a relative time.

Appendix C - dticas.h Header File

```
*****  
* Copyright (c) 1990-2008 Dialogic® Corporation  
* All Rights Reserved. All names, products, and services mentioned herein  
* are the trademarks or registered trademarks of their respective organizations  
* and are the sole property of their respective owners  
*****  
*****  
* Filename: dticas.h  
* DESCRIPTION: DTI CAS template definitions..  
*****  
  
#ifndef __DTICAS  
#define __DTICAS  
  
typedef struct t_create_transition_msg  
{  
    BYTE msg_code;  
    BYTE rfu;  
    WORD template_id;  
    BYTE PreTransCode;  
    BYTE PostTransCode;  
    WORD PreTransInterval;  
    WORD PreTransIntervalNom; /* [ci]+ send template adition */  
    WORD PostTransInterval;  
    WORD PostTransIntervalNom; /* [ci]+ send template adition */  
} DTCAS_CREATE_TRANSITION_MSG;  
  
typedef DTCAS_CREATE_TRANSITION_MSG *P_DTCAS_CREATE_TRANSITION_MSG;  
  
typedef struct t_create_pulse_msg  
{  
    BYTE msg_code;  
    BYTE rfu;  
    WORD template_id;  
    BYTE OffPulseCode;  
    BYTE OnPulseCode;  
    WORD PrePulseInterval;  
    WORD PrePulseIntervalNom; /* [ci]+ send template adition */  
    WORD PulseIntervalMin;  
    WORD PulseIntervalNom;  
    WORD PulseIntervalMax;  
    WORD PostPulseInterval;  
    WORD PostPulseIntervalNom; /* [ci]+ send template adition */  
} DTCAS_CREATE_PULSE_MSG;  
  
typedef DTCAS_CREATE_PULSE_MSG *P_DTCAS_CREATE_PULSE_MSG;  
  
typedef struct t_create_train_msg  
{  
    BYTE msg_code;
```

Dialogic® Digital Network Interface Software Reference

```
BYTE rfu;
WORD template_id;
BYTE OffPulseCode;
BYTE OnPulseCode;
WORD PreTrainInterval;
WORD PreTrainIntervalNom; /* [ci]+ send template adition */
WORD PulseIntervalMin;
WORD PulseIntervalNom;
WORD PulseIntervalMax;
WORD InterPulseIntervalMin;
WORD InterPulseIntervalNom;
WORD InterPulseIntervalMax;
WORD PostTrainInterval;
WORD PostTrainIntervalNom; /* [ci]+ send template adition */
} DTCAS_CREATE_TRAIN_MSG;

typedef DTCAS_CREATE_TRAIN_MSG *P_DTCAS_CREATE_TRAIN_MSG;

typedef struct t_create_reply_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
    WORD result;
} DTCAS_REPLY_MSG;

typedef DTCAS_REPLY_MSG *P_DTCAS_REPLY_MSG;

typedef struct t_delete_template_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
} DTCAS_DELETE_TEMPLATE_MSG;

typedef DTCAS_DELETE_TEMPLATE_MSG *P_DTCAS_DELETE_TEMPLATE_MSG;

typedef struct t_ena_dis_template_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
} DTCAS_ENA_DIS_TEMPLATE_MSG;

typedef DTCAS_ENA_DIS_TEMPLATE_MSG *P_DTCAS_ENA_DIS_TEMPLATE_MSG;

/* (11/22/1999): Additional Structure defined to add new commands to CAS
management function */

typedef struct t_get_template_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
} DTCAS_GET_TEMPLATE_MSG;
```

Appendix C – dticas.h Header File

```
typedef DTCAS_GET_TEMPLATE_MSG *P_DTCAS_GET_TEMPLATE_MSG;

typedef struct t_get_next_template_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
} DTCAS_GET_NEXT_TEMPLATE_MSG;

typedef DTCAS_GET_NEXT_TEMPLATE_MSG *P_DTCAS_GET_NEXT_TEMPLATE_MSG;

typedef struct t_clear_all_template_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
} DTCAS_CLEAR_ALL_TEMPLATE_MSG;

typedef DTCAS_CLEAR_ALL_TEMPLATE_MSG *P_DTCAS_CLEAR_ALL_TEMPLATE_MSG;

typedef struct t_get_template_reply_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
    WORD result;
    union template_reply_msg {
        DTCAS_CREATE_TRANSITION_MSG transition;
        DTCAS_CREATE_PULSE_MSG pulse;
        DTCAS_CREATE_TRAIN_MSG train;
    } tmplt_info;
} DTCAS_GET_TEMPLATE_REPLY_MSG;

typedef DTCAS_GET_TEMPLATE_REPLY_MSG *P_DTCAS_GET_TEMPLATE_REPLY_MSG;

/* End addition dated 1/27/2000 */

typedef struct t_detected_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
    WORD result;
    WORD count;
    DWORD timestamp;
} DTCAS_DETECTED_MSG;

typedef DTCAS_DETECTED_MSG *P_DTCAS_DETECTED_MSG;

/* [ci] send template addition */
typedef struct t_transmit_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
    BYTE pulse_count;
}
```

Dialogic® Digital Network Interface Software Reference

```
    BYTE sequence_count;
} DTCAS_TRANSMIT_MSG;

typedef DTCAS_TRANSMIT_MSG *P_DTCAS_TRANSMIT_MSG;

typedef struct t_end_transmit_msg
{
    BYTE msg_code;
    BYTE rfu;
    WORD template_id;
    BYTE pulse_count;
    BYTE sequence_count;
    DWORD timestamp;
} DTCAS_END_TRANSMIT_MSG;

typedef DTCAS_END_TRANSMIT_MSG *P_DTCAS_END_TRANSMIT_MSG;
/* [ci] send template addition */

/* Message code definitions. */

/* Commands: */
#define DTCAS_CREATE_TRANSITION      0
#define DTCAS_CREATE_PULSE           1
#define DTCAS_CREATE_TRAIN            2
#define DTCAS_DELETE_TEMPLATE         3
#define DTCAS_ENABLE_TEMPLATE         4
#define DTCAS_DISABLE_TEMPLATE        5
#define DTCAS_TRANSMIT_TEMPLATE       6
#define DTCAS_GET_TEMPLATE            7 /* Get a template definition (1/27/2000) */
#define DTCAS_GET_NEXT_TEMPLATE        8 /* Get a definition of next template (1/27/2000) */
#define DTCAS_CLEAR_ALL_TEMPLATE       9 /* Clear the template queue (1/27/2000) */

/* Replies: */
#define DTCAS_CREATE_TRANSITION_COMPLETE 0
#define DTCAS_CREATE_PULSE_COMPLETE     1
#define DTCAS_CREATE_TRAIN_COMPLETE     2
#define DTCAS_DELETE_TEMPLATE_COMPLETE  3
#define DTCAS_ENABLE_TEMPLATE_COMPLETE  4
#define DTCAS_DISABLE_TEMPLATE_COMPLETE 5
#define DTCAS_TRANSMIT_TEMPLATE_COMPLETE 6
#define DTCAS_GET_TEMPLATE_COMPLETE     7 /* Template definition received (1/27/2000) */
#define DTCAS_GET_NEXT_TEMPLATE_COMPLETE 8 /* Definition of next template received (1/27/2000) */
#define DTCAS_CLEAR_ALL_TEMPLATE_COMPLETE 9 /* Clearing template queue completed (1/27/2000) */

/*
 * Note: The result codes 1-15 are not implemented yet and are reserved for
 *       future use.
 */

/* Result Codes: */
#define DTCAS_ERR_SIGNAL_ID           0x10 /* Identical template creation requested */
#define DTCAS_ERR_SIGNAL_TABLE_FULL   0x11 /* The signal definition table is full */
#define DTCAS_ERR_POSTINT_LTE_ITIMX  0x25 /* Post Interval Nom <= Inter-Train
                                         Interval Max */
```

Appendix C – dticas.h Header File

```

#define DTCAS_ERR_ITIMX_LTE_IPIMX      0x26 /* Inter-Train Max is <= Inter-Pulse Max */
#define DTCAS_ERR_INT_TRAIN_MIN        0x27 /* Inter-Train Min Time cannot be 0 */
#define DTCAS_ERR_ITIMN_GTE_ITINM      0x28 /* Inter-Train Min is >= Inter-Train Nom*/
#define DTCAS_ERR_ITINM_GTE_ITIMX      0x29 /* Inter-Train Nom is >= Inter-Train Max*/
#define DTCAS_ERR_INT_PULSE_MIN        0x30 /* The Inter-Pulse Min Time cannot be 0*/
#define DTCAS_ERR_IPIMN_GTE_IPINM      0x31 /* The Inter-Pulse Min is >= Inter-Pulse Nom*/
#define DTCAS_ERR_IPINM_GTE_IPIMX      0x32 /* The Inter-Pulse Nom is >= Inter-Pulse Max*/
#define DTCAS_ERR_PULSE_MIN            0x33 /* The Pulse Min Time cannot be 0*/
#define DTCAS_ERR_PINM_GTE_PIN         0x34 /* The Pulse Min is >= Pulse Nom*/
#define DTCAS_ERR_PINM_GTE_PIMX        0x35 /* The Pulse Nom is >= Pulse Max*/
#define DTCAS_ERR_PREI_LTE_PREINM     0x36 /* The Pre Interval time (min) >= Pre Interval
                                         time nom*/
#define DTCAS_ERR_POSTI_LTE_POSTINM    0x37 /* The Post Interval time (min) >= Post
                                         Interval time nom */
#define DTCAS_ERR_TEMPLATE_TABLE_EMPTY 0x38 /* The Template table is empty -
                                         no templates defined */
#define DTCAS_ERR_EMPTY_SIGPAT_TABLE   0x39 /* Applies to a get next template command*/
#define DTCAS_ERR_END_TMPL_TABLE       0x17 /* Next template was not found (1/27/2000) */
#define DTCAS_ERR_SIGNAL_ENABLED       0x0f /* The signal is already enabled. */
#define DTCAS_ERR_SIGNAL_NOT_ENABLED   0x3a /* Attempt to disable a signal pattern
                                         that's not enabled*/
#define DTCAS_ERR_TEMPLATE_NOT_DEFINED 0x3b /* Template was not defined*/
#define DTCAS_ERR_POSTINT_LTE_IPIMX    0x3c /* The Train Post-Interval is <= the
                                         inter pulse interval*/
#define DTCAS_ERR_INVALID_TEMPLATE_REQ 0x3d /* Template to create is not a Seq,
                                         Train, Pulse, Transit*/
#define DTCAS_ERR_PULSE_MIN_EQ_ZERO    0x3f /* The Pulse time nom is zero */
#define DTCAS_ERR_PULSE_NOM_EQ_ZERO    0x4a /* The Pulse time max is zero */
#define DTCAS_ERR_PULSE_MAX_EQ_ZERO    0x4b /* The Inter-Pulse-
                                         interval min time is zero*/
#define DTCAS_ERR_INTR_PULSE_MIN_EQ_ZERO 0x4c /* The Inter-Pulse-interval nom time
                                         is zero*/
#define DTCAS_ERR_INTR_PULSE_MAX_EQ_ZERO 0x4d /* The Inter-Pulse-interval max time
                                         is zero */
#define DTCAS_ERR_INTR_TRAIN_MIN_EQ_ZERO 0x4e /* The Inter-Train-
                                         interval min time is zero*/
#define DTCAS_ERR_INTR_TRAIN_NOM_EQ_ZERO 0x4f /* The Inter-Train-interval min time
                                         is zero */
#define DTCAS_ERR_INTR_TRAIN_MAX_EQ_ZERO 0x50 /* The Inter-Train-interval min time
                                         is zero*/
#define DTCAS_ERR_PRE_INTRV_EQ_ZERO    0x5b /* The Pre template time (really a min)
                                         is zero*/
#define DTCAS_ERR_PRE_INTRV_NOM_EQ_ZERO 0x5c /* The Pre template nom time is zero */
#define DTCAS_ERR_TEMPLATESENDNOTDONE 0x16 /* Sending of a template is not
                                         finished yet */
#define DTCAS_ERR_INVALIDSUBCOMMAND   0x12 /* The subcommand is invalid */

#endif /* __DTICAS */

```

Dialogic® Digital Network Interface Software Reference

Appendix D - Related Publications

This section lists publications you should refer to for additional information on creating digital network interface applications.

- *Dialogic® Global Call API Programming Guide*
- *Dialogic® Global Call API Library Reference*
- *Dialogic® Voice API Programming Guide*
- *Dialogic® Voice API Library Reference*
- *Dialogic® Standard Runtime Library API Programming Guide*
- *Dialogic® Standard Runtime Library API Library Reference*
- *Dialogic® Audio Conferencing API Programming Guide*
- *Dialogic® Audio Conferencing API Library Reference*
- *Dialogic® Modular Station Interface API Programming Guide*
- *Dialogic® Modular Station Interface API Library Reference*

Dialogic® Digital Network Interface Software Reference

Glossary

A-law: A pulse-code modulation (PCM) algorithm used in digitizing telephone audio signals in E1 areas.

ANI: Automatic Number Identification. A feature of certain telecommunications networking protocols or processes that allows the caller's phone number to be detected and displayed by the called party.

asynchronous function: On Linux platforms, a function that allows program execution to continue without waiting for a task to complete. To implement an asynchronous function, an application defined event handler must be enabled to trap and process the completion event. See *synchronous function*.

B8ZS: Binary 8-zero Substitution. Basic bipolar coding algorithm for digital telephony. At the transmitting end, a string of 8 zeros is deliberately replaced with a pulse that produces a bipolar violation. At the receiving end, bipolar violations are replaced with a string of 8 zeros.

BLT: Board Locator Technology. Operates in conjunction with a rotary switch to determine and set non-conflicting slot and IRQ interrupt-level parameters, thus eliminating the need to set jumpers or DIP switches.

buffer: A block of memory or temporary storage device that holds data until it can be processed. It is used to compensate for the difference in the rate of the flow of information (or time occurrence of events) when transmitting data from one device to another.

CAS: Channel Associated Signaling. The signaling protocol used with the CEPT E1 telephony standard. In CAS, one of the 32 channels, time slot 16, is dedicated to signaling for all of the 30 voice channels. Unlike T1 systems, which use robbed-bit signaling, telephony systems using CAS are considered examples of out-of-band signaling. See *in-band signaling, robbed-bit signaling*.

CCITT: International Telephone and Telegraph Consultative Committee, a part of the ICU (International Telecommunications Union) responsible for formulating telephony and other standards, such as E1.

CEPT: Conference of European Postal and Telecommunications administrations. Defines how bits of a PCM carrier system in E1 areas will be used and in what sequence. CEPT format consists of 30 voice channels, one signaling channel, and one framing (synchronization) channel. See *E1*.

CO: Central Office. The telephone company facility where subscriber lines are linked, through switches, to other subscriber lines (including local and long distance lines).

CRC: Cyclic Redundancy Check. A basic error checking mechanism for digital transmissions in which a CRC character, indicating the number of bits in a block of data, is included in the transmission. The receiving end calculates the number of bits in the block independently and compares the result to the received CRC character. CRC4 is a specific algorithm used to implement error checking.

crossover cable: A cable used to interconnect two network boards, often to join two T1 or E1 lines. The cable is split and folded so that the lines carrying network receive data on one side of the crossover connector mate with network transmit lines on the other side of the crossover.

device: A computer peripheral or component that is controlled through a software device driver. A digital network interface board is considered a physical board containing one or more logical *board devices*, and each time slot on the board is a *time slot device*.

device channel: A voice data path that processes one incoming or outgoing call at a time (equivalent to the terminal equipment terminating a phone line). Compare *time slot*.

DNIS: Dialed Number Identification Service. An 800 service feature that allows a business to determine the geographical area from which a call originated by the digits dialed (a different phone number is made available to callers in each region).

drop-and-insert: A system configuration in which two network boards are interconnected by a crossover cable and continuously pass all time slots through to each other. A time slot from one network can be “dropped” to a resource module for processing. In return, the resource module can “insert” signaling and audio into the bit stream received from the other side of the crossover connector. (A resource module can insert only to the network board on the same side of the crossover.)

This bit stream is applied through the network module for outbound transmission to the attached network span.

E1: Another name given to the CEPT digital telephony format devised by the CCITT. See *CEPT*.

E&M protocol: A signaling protocol that defines the sending and receiving of signals. E&M protocol is the most common protocol on T1 trunks.

event: An unsolicited or asynchronous communication from a hardware device to an operating system, application, or driver. Events are generally attention getting messages, allowing a process to decide when and where to redirect its resources.

event handler: A portion of an application program designed to trap and control processing of device-specific events. The rules for creating a digital network interface event handler are the same as those for creating a Linux signal handler.

Extended Attribute functions: Class of functions that take one input parameter (a valid device handle) and return device-specific information. For instance, a digital network interface Linux Extended Attribute function returns information specific to the digital network interface class of devices. Extended Attribute function names are case-sensitive and must be in capital letters. See *Standard Attribute functions*.

firmware: A set of program instructions that reside on an expansion board, usually in EPROM.

fixed routing In this configuration, the resource devices (voice/fax) and network interface devices are permanently coupled together in a fixed configuration. Only the network interface time slot device has access to the CT Bus. Used in Dialogic® DM3 architecture.

flexible routing In this configuration, the resource devices (voice/fax) and network interface devices are independent, which allows exporting and sharing of the resources. All resources have access to the CT Bus. Used in Dialogic® DM3 architecture.

in-band signaling: **1.** In an analog telephony circuit, in-band refers to signaling that occupies the same transmission path and frequency band used to transmit voice tones. **2.** In digital telephony, “in-band” has

come to mean signaling that is transmitted within an 8-bit voice sample or time slot, as in T1 “robbed-bit” signaling.

IRQ: Interrupt request. A signal sent to the central processing unit (CPU) to temporarily suspend normal processing and transfer control to an interrupt handling routine. Interrupts may be generated by conditions such as completion of an I/O process, detection of hardware failure, power failures, etc.

mu-law: **1.** A pulse code modulation (PCM) algorithm used in digitizing telephone audio signals in T1 areas. **2.** The PCM coding and compounding standard used in Japan and North America.

PSTN: Public Switched Telephone Network.

robbed-bit signaling: The type of signaling protocol implemented in areas using the T1 telephony standard. In robbed-bit signaling, signaling information is carried in-band, within the 8-bit voice samples. These bits are later stripped away, or “robbed,” to produce the signaling information for each of the 24 time slots. See *CAS, in-band signaling*.

route: Assign a resource to a time slot.

SCbus: Signal Computing bus. The TDM (Time Division Multiplexed) resource sharing bus that allows information to be transmitted and received among resources over multiple data lines. A hardwired connection between switch handlers on SCbus based products for transmitting information over 1024 time slots to all devices connected to the SCbus.

SCSA: Signal Computing System Architecture.

Signal Computer System Architecture: SCSA. A standard open development platform. An open hardware and software standard that incorporates virtually every other standard in PC-based switching. All signaling is out-of-band. In addition, SCSA offers time slot bundling and allows for scalability.

signaling insertion: Mode in which the digital network interface (or any network board) overwrites signaling data from resource modules in order to perform signaling to the network.

SRL: Dialogic® Standard Runtime Library. A software resource containing Event Management functions, Standard Attribute functions, and data structures used by all devices, but which return data unique to the device.

Standard Attribute functions: Class of functions that take one input parameter (a valid device handle) and return generic information about the device. For instance, Standard Attribute functions return IRQ and error information for all device types. Standard Attribute function names are case-sensitive and must be in capital letters. Standard Attribute functions for all devices are contained in the SRL. See *Extended Attribute functions*.

synchronous function: On Linux platforms, a function that blocks program execution until a value is returned by the device. Also called a blocking function. See *asynchronous function*.

time slot: In a digital telephony environment, a normally continuous and individual communication (for example, someone speaking on a telephone) is (1) digitized, (2) broken up into pieces consisting of a fixed number of bits, (3) combined with pieces of other individual communications in a regularly repeating, timed sequence (multiplexed), and (4) transmitted serially over a single telephone line. Each individual digitized communication is called a time slot. In T1 areas, 24 time slots are multiplexed onto a single twisted-wire pair. In E1 areas, 32 time slots are multiplexed together. Compare *device channel*.

time slot assignment: The ability to route the digital information contained in a time slot to a specific device channel. See *device channel*.

wink: In T1 or E1 systems, a signaling bit transition from on to off, or off to on, and back again to the original state. In T1 systems, the wink signal can be transmitted on either the A or B signaling bit. In E1 systems, the wink signal can be transmitted on either the A, B, C, or D signaling bit. Using either system, the choice of signaling bit and wink polarity (on-off-on or off-on-off hook) is configurable through digital network interface board download parameters.

Index

A

aborting an application, 192
advanced features, 192
Agent automation, 13
alarm
 transmission to network, 169
Alarm functions, 32
alarm handling, 181
 E1, 15
 hardware alarm indicators, 30
 mode, 134
asynchronous, 89
asynchronous mode, 31
Audiotex, 13

B

backward compatibility, 14
billing automation
 See Operator services, 13
blue alarm, 27

C

CAS, 23
Cellular messaging, 13
Central-office-based voice mail
 See CO-based voice mail, 13
CEPT, 23
Channel Associated Signaling
 See CAS, 23
closing devices, 87

compiling, 192

D

D4 frame, 18
D4 superframe, 18
device handle, 126
device parameter, 146
device parameters
 See `dt_getparm()`, 107
Diagnostic functions, 32
diagnostics, 129
 testing communications, 158
 testing I/O interface, 162
dialing, 14
Direct dial-in (DDI) service, 13
directory assistance
 See Operator services, 13
distant multiframe alarm, 28
drop-and-insert configuration, 13
DS-0, 17
DS-1, 17
`dt_getctinfo()`, 94
`dt_getevtmsk()`, 197
`dt_getxmitslot()`, 119
`dt_listen()`, 122
`dt_unlisten()`, 166
`dtlib.h`, 39

Dialogic® Digital Network Interface Software Reference

E

E&M, 20
E1 frame, 20
EPROM
 See ATDT_ROMVER(), 57
 version, 57
event mask, 102
 values, 104
events
 event bitmask
 See event mask, 102
 event management, 13

Extended Attribute functions, 33

F

firmware
 See ATDT_DNLVER(), 49
 version, 49
function
 dt_getctinfo(), 94
 dt_getxmitslot(), 119
 dt_listen(), 122
 dt_unlisten(), 166
function library
 See also Voice library, 14
functions supported
 network interface library, 195

H

hardware compatibility
 backward compatibility, 14
hardware configuration, 180
header files, 177

I

idle state

See ATDT_IDLEST(), 54

idling, 143
include files, 177
initialize time slots, 182
intercept treatments
 See Operator services, 13

L

LEDs, 30
linking, 192

N

network interface library
 supported functions, 195

O

opening time slots, 14
Operator services, 13

P

Parameter Request functions, 33
Parameter Setting functions, 33

R

red alarm, 27
remote alarm, 28
Resource Management functions, 33
robbed-bit signaling, 19

S

SC_TSINFO, 123
SCbus
 routing, 26
 routing functions, 34
 terminology, 15

SCbus routing functions, 34
Service bureaus, 13
signaling
 E1 national/international bits, 25
 mode, 42
 See ATDT_BDMODE(), 42
 T1, 19
signaling all 1s alarm, 29
signaling bits, 155
 See ATDT_TSSGBIT(), 68
 transmit, 152
signaling insertion mode, 149
signaling mode
 See ATDT_TS MODE(), 65
silence, 143
SRL, 13, 32
Standard Attribute functions
 See SRL, 32
Standard Runtime Library
 see SRL, 13
supported functions
 network interface library, 195
synchronization
 T1, 19
synchronous, 158
synchronous mode, 31

T

Telemarketing, 13
terminate configuration, 13
tests, 158, 162
time division multiplexing, 18
time slot

signaling bits, 68
signaling mode, 65
Time Slot Audio functions, 34
Time Slot Signaling functions, 35
time slot status
 See ATDT_STATUS, 62
transparent signaling mode, 15
 See also signaling mode, 15

U

unframed all 1s alarm, 28

V

Voice library, 14

W

wink signaling, 172

Y

yellow alarm, 27